



SS84CG THRU SS820CG

Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 40V to 200V


Forward Current - 8A

Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

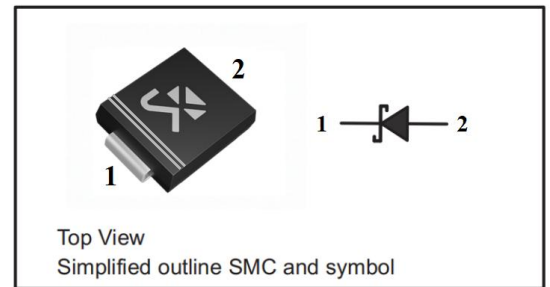

Absolute Maximum Ratings and Electrical characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20%

Parameter	Symbol	SS84 CG	SS86 CG	SS88 CG	SS810 CG	SS812 CG	SS815 CG	SS820 CG	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	40	60	80	100	120	150	200	V
Maximum RMS Voltage	V _{RMS}	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V _{DC}	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	I _{F(AV)}	8.0							A
Peak Forward Surge Current,8.3ms Single Half Sine-wave Superimposed On Rated Load(JEDEC method)	I _{FSM}	150							A
Peak Forward Surge Current,1.0ms Single Half Sine-wave Superimposed On Rated Load(JEDEC method)	I _{FSM}	300							A
I ² t Rating for fusing (3ms≤8.3ms)	I ² t	93.3							A ² S
Max Instantaneous Forward Voltage at 8A	V _F	0.55	0.70	0.85		0.95			V
Maximum DC Reverse Current T _A =25℃ at Rated DC Reverse Voltage T _A =100℃	I _R	1.0							mA
		50							
Typical Junction Capacitance ⁽¹⁾	C _j	410	330	220		130			pF
Typical Thermal Resistance ⁽²⁾	R _{θJA}	37							℃/W
	R _{θJC}	10							
	R _{θJL}	13							
Operating Junction Temperature Range	T _j	-55~+125							℃
Storage Temperature Range	T _{stg}	-55~+150							℃

(1) Measured at 1MHz and applied reverse voltage of 4V D.C

(2) P.C.B. mounted with 1.5"x1.5" (3.81x3.81cm) copper pad areas



SS84CG THRU SS820CG

Typical Characteristics

Fig.1 Forward Current Derating Curve

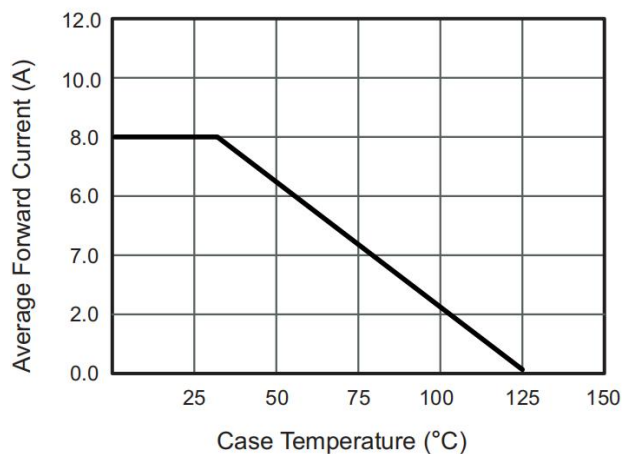


Fig.2 Typical Reverse Characteristics

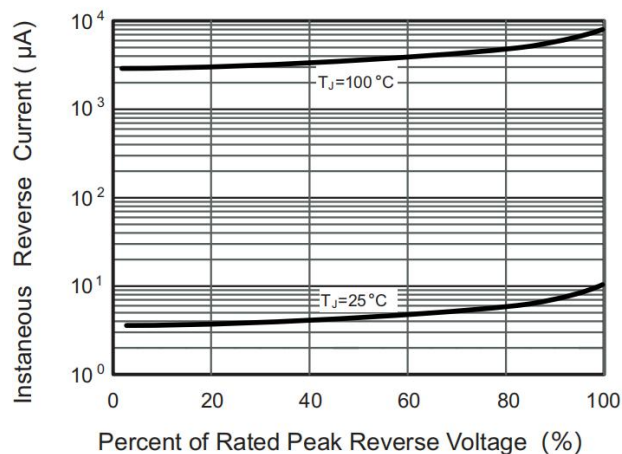


Fig.3 Typical Forward Characteristic

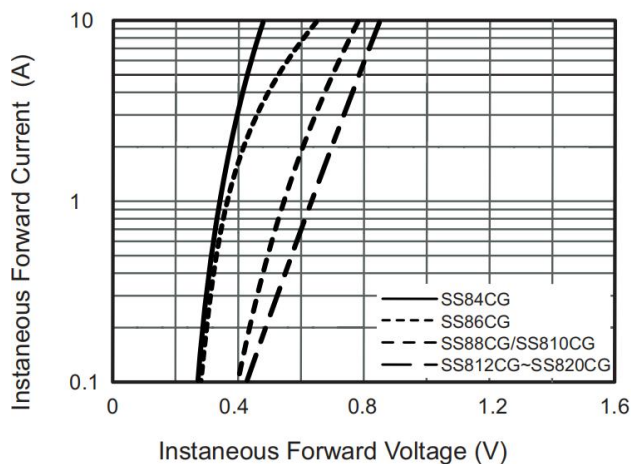


Fig.4 Typical Junction Capacitance


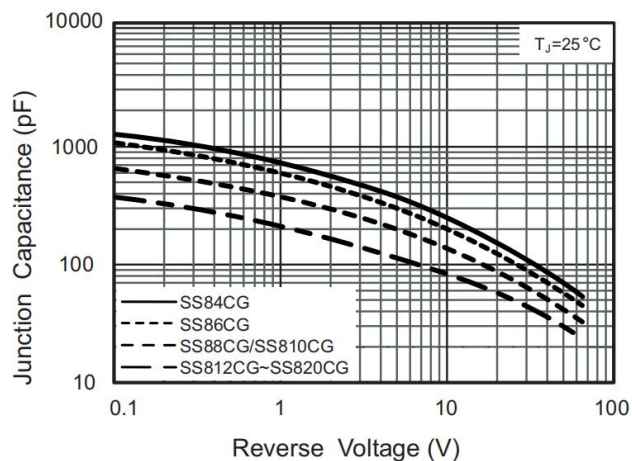


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



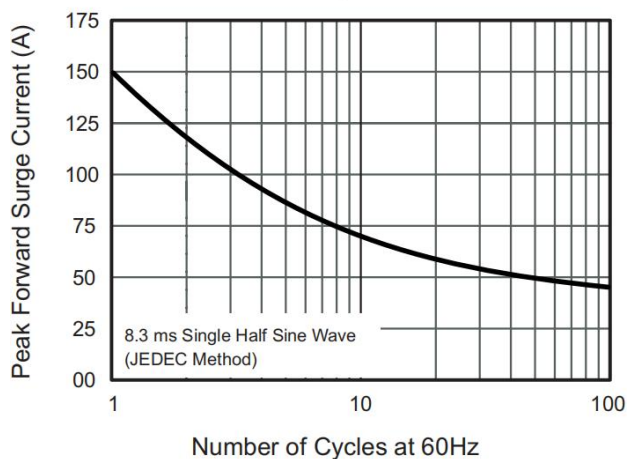


SS84CG THRU SS820CG

Package Information

SMC


Dimensions in mm

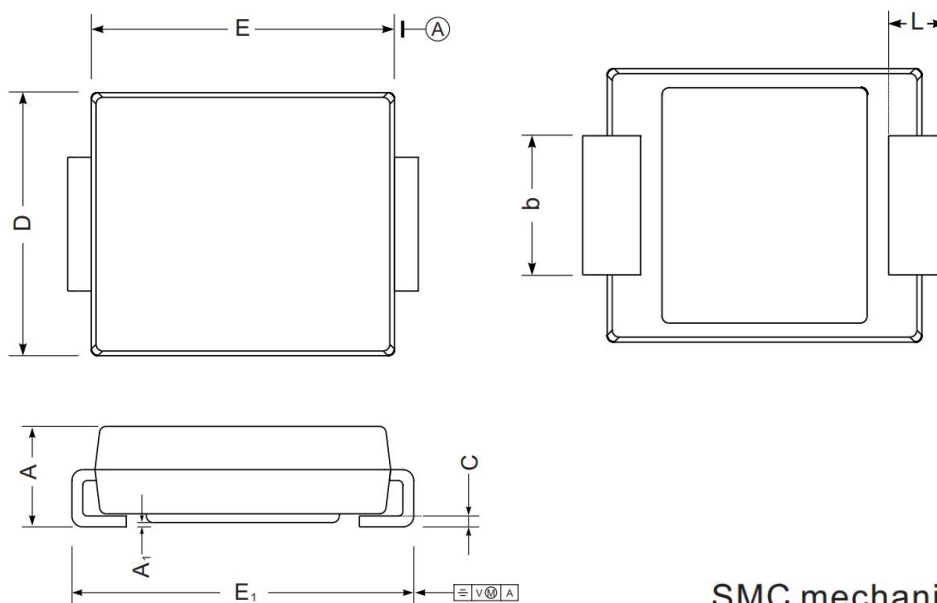

SMC mechanical data


UNIT		A	E	D	E ₁	A ₁	C	L	b
mm	max	2.62	7.0	6.2	8.0	0.21	0.31	1.6	3.25
	min	2.00	6.5	5.6	7.6	0.05	0.15	0.9	2.75
mil	max	103	276	244	315	8.3	12	63	128
	min	79	256	220	299	2.0	5.9	35	108

The recommended mounting pad size

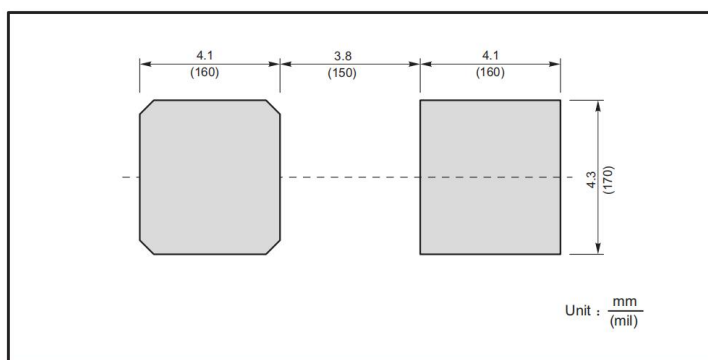

Marking

Type number	Marking code
SS84CG	SS84
SS86CG	SS86
SS88CG	SS88
SS810CG	SS810
SS812CG	SS812
SS815CG	SS815
SS820CG	SS820



SS84CG THRU SS820CG

Shikues Disclaimer

1.Accuracy of Information and Right to Modify

The information provided in this document is for reference only. Shikues reserves the right to make changes to this document and to the specifications of the products described herein at any time, without prior notice, for the purpose of improving reliability, function, design, or for any other reason. It is the customer's responsibility to obtain and verify the latest product information and specifications before making any final design, procurement, or usage decisions.

2.No Warranty

Shikues makes no express or implied warranties, representations, or guarantees regarding the suitability of its products for any particular purpose.

Shikues assumes no liability for any assistance provided or for the design of customer products. All products are supplied "as is."

3.Intended Use and Limitation of Liability

The products described in this document are intended for use in general-purpose electronic devices. They are neither designed nor tested nor authorized for use in transportation equipment or applications requiring high reliability. Unless expressly authorized in writing by Shikues, these products must not be used as critical components in life-support systems or any applications where failure could directly pose a risk to human life (including, but not limited to, medical devices, transportation systems, aerospace equipment, nuclear facilities, and safety-critical systems).

Shikues assumes no responsibility or liability for any consequences arising from the use of its products in unauthorized or unintended applications.

Neither Shikues nor its representatives shall be held liable for any resulting damages.

4.Intellectual Property

This document does not grant any express or implied license—whether by estoppel, implication, or otherwise—to use any intellectual property rights of Shikues.