



BAV19W THRU BAV21W


Features

- For surface mounted applications
- Glass passivated chip junction
- Fast reverse recovery time
- Ideal for auto mated placement
- Lead free in comply with EU RoHS 2011/65/EU directives

Ordering Information

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

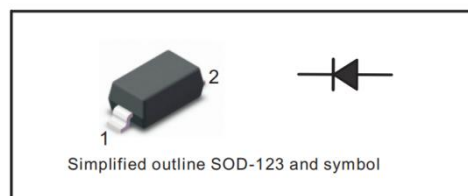

Ordering Number	Marking	Package
BAV19W	A8	SOD-123
BAV20W	T2	SOD-123
BAV21W	T3	SOD-123

Absolute Maximum Ratings($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter		Symbol	BVA19W	BAV20W	BAV21W	Units
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	120	200	250	V
Maximum RMS Voltage		V _{RMS}	100	150	200	V
Continuous Forward Current		I _F	250			mA
Repetitive Peak Forward Current		I _{FRM}	625			mA
Peak Forward Surge Current	at 1s	I _{FSM}	1			A
	at 1ms		3			
	at 1μs		9			
Total Power Dissipation		P _{tot}	500			mW
Operating and Storage Temperature Range		T _J ,T _{STG}	-55~+150			°C

Electrical Characteristics($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter		Symbol	BVA19W	BAV20W	BAV21W	Units
Reverse Breakdown Voltage at I _R = 100uA		V _{(BR)R}	120	200	250	V
Maximum Forward Voltage	at 100mA	V _F	1.00			V
	at 200mA		1.25			
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A =25°C	I _R	0.1			μA
	T _A =150°C		100			
Typical Junction Capacitance at V _R = 4V, f = 1MHz		C _J	5			pF
Maximum Reverse Recovery Time		t _{rr}	50			ns



BAV19W THRU BAV21W

Typical Characteristic

Fig.1 Forward Current Derating Curve

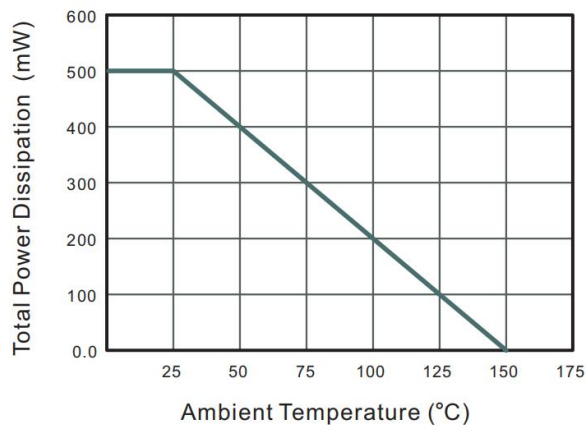


Fig.2 Typical Reverse Characteristics

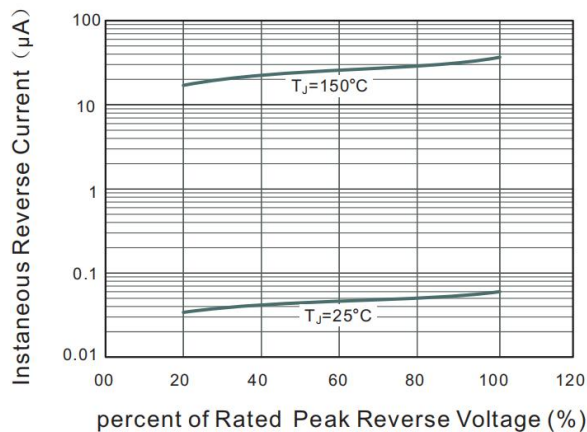


Fig.3 Typical Instantaneous Forward Characteristics


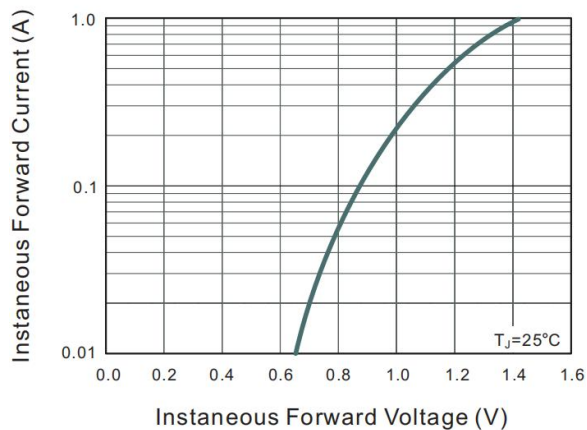


Fig.4 Typical Junction Capacitance



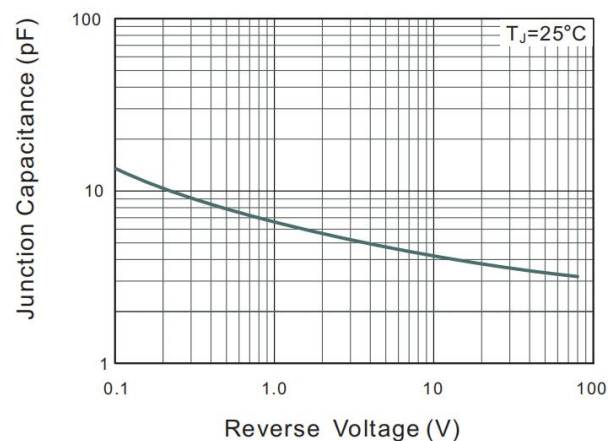


BAV19W THRU BAV21W

Package Information


SOD-123

Dimensions in mm

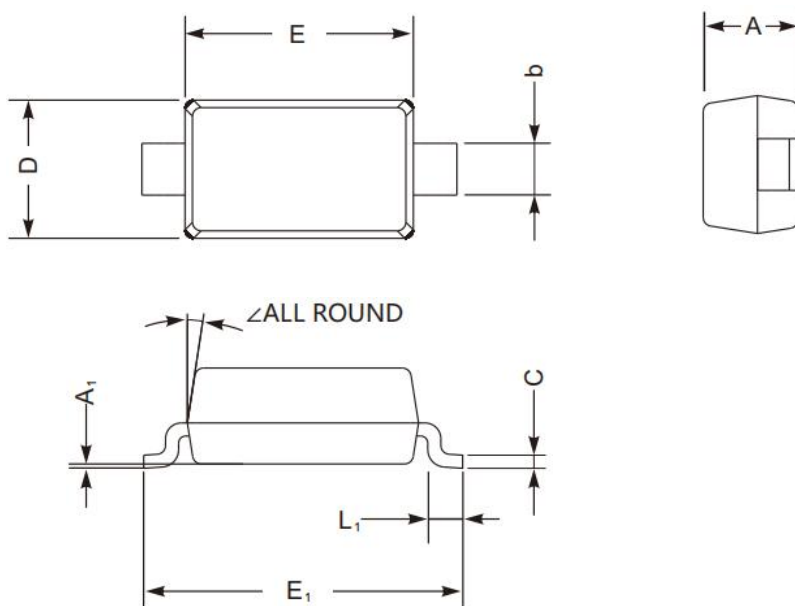

Unit		A	C	D	E	E ₁	L ₁	b	A ₁	∠
mm	max	1.3	0.22	1.8	2.8	3.9	0.45	0.7	0.2	9°
	min	0.9	0.09	1.5	2.5	3.6	0.25	0.5	-	
mil	max	51	8.7	71	110	154	18	28	8	
	min	35	3.5	59	98	142	10	20	-	

The recommended mounting pad size

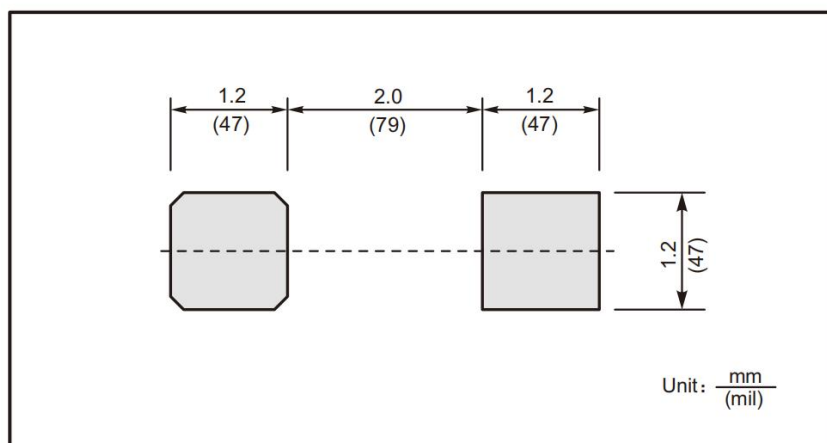



BAV19W THRU BAV21W

Shikues Disclaimer

1.Accuracy of Information and Right to Modify

The information provided in this document is for reference only. Shikues reserves the right to make changes to this document and to the specifications of the products described herein at any time, without prior notice, for the purpose of improving reliability, function, design, or for any other reason. It is the customer's responsibility to obtain and verify the latest product information and specifications before making any final design, procurement, or usage decisions.

2.No Warranty

Shikues makes no express or implied warranties, representations, or guarantees regarding the suitability of its products for any particular purpose.

Shikues assumes no liability for any assistance provided or for the design of customer products. All products are supplied "as is."

3.Intended Use and Limitation of Liability

The products described in this document are intended for use in general-purpose electronic devices. They are neither designed nor tested nor authorized for use in transportation equipment or applications requiring high reliability. Unless expressly authorized in writing by Shikues, these products must not be used as critical components in life-support systems or any applications where failure could directly pose a risk to human life (including, but not limited to, medical devices, transportation systems, aerospace equipment, nuclear facilities, and safety-critical systems).

Shikues assumes no responsibility or liability for any consequences arising from the use of its products in unauthorized or unintended applications.

Neither Shikues nor its representatives shall be held liable for any resulting damages.

4.Intellectual Property

This document does not grant any express or implied license—whether by estoppel, implication, or otherwise—to use any intellectual property rights of Shikues.