

ER2A THRU ER2J

SURFACE MOUNT SUPER FAST RECTIFIER

Reverse Voltage - 50 to 600 Volts Forward Current - 2.0 Amperes


FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Super fast switching for high efficiency
- Low reverse leakage
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed: 260 C/10 seconds at terminals

MECHANICAL DATA

- **Case:** JEDEC DO-214AA molded plastic body
- **Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any
- **Weight:** 0.003 ounce, 0.093 grams

DO-214AA

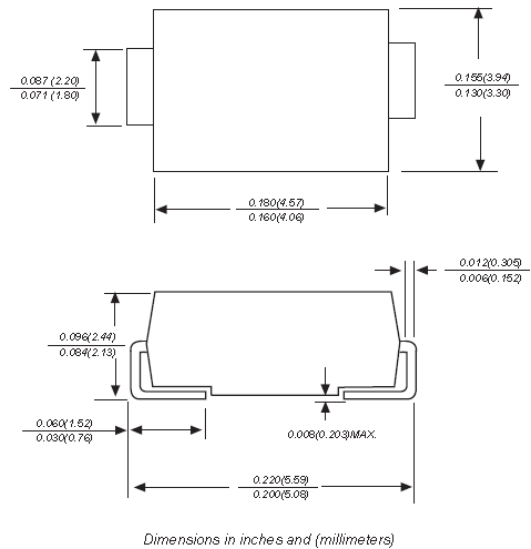

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	ER2A	ER2B	ER2C	ER2D	ER2E	ER2G	ER2J	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	150	200	300	400	600	VOLTS
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	VOLTS
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	600	VOLTS
Maximum average forward rectified current at T _L =55°C	I _(AV)	2.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	50.0							Amps
Maximum instantaneous forward voltage at 2.0A	V _F	0.95				1.25		1.7	Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	5.0 50.0							μA
Maximum reverse recovery time (NOTE 1)	t _{rr}	35							ns
Typical junction capacitance (NOTE 2)	C _J	60.0							pF
Typical thermal resistance (NOTE 3)	R _{θJA}	40.0							°C/W
Operating junction and storage temperature range	T _J ,T _{STG}	-65 to +150							°C

Note: 1. Reverse recovery condition $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


3. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas



ER2A THRU ER2J


AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1-FORWARD CURRENT DERATING CURVE

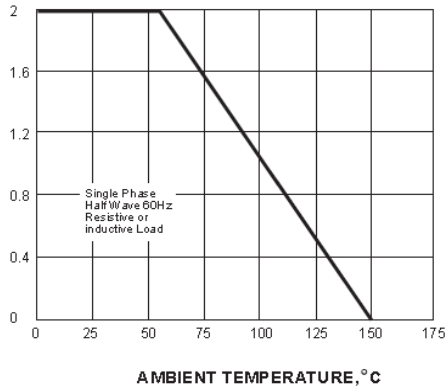


PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

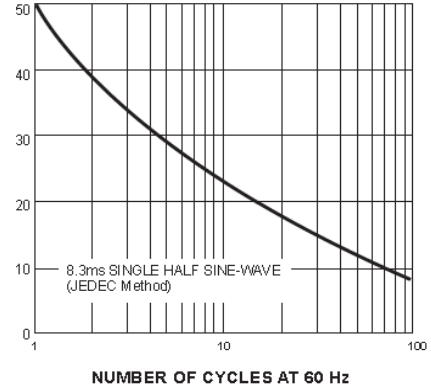

INSTANTANEOUS FORWARD
CURRENT, AMPERES


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

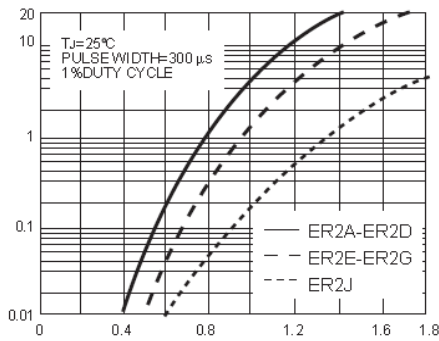

INSTANTANEOUS FORWARD VOLTAGE,
VOLTS


INSTANTANEOUS REVERSE CURRENT,
MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

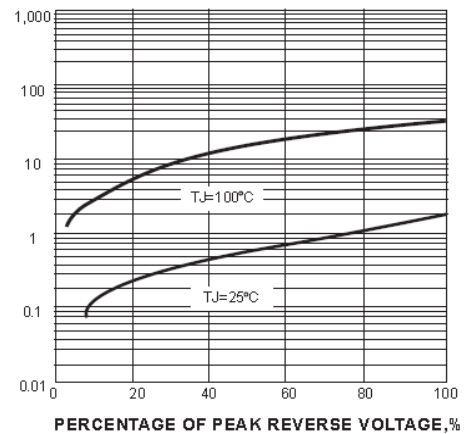

JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

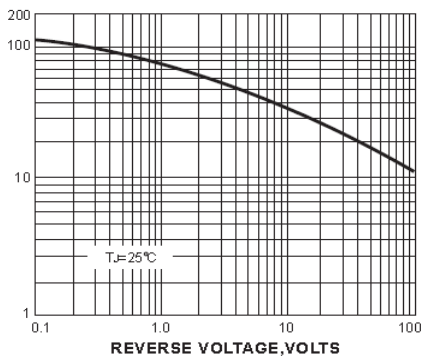

TRANSIENT THERMAL IMPEDANCE,
 $^\circ\text{C}/\text{W}$

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

