

# ES2ABG THRU ES2JBG

## Surface Mount Superfast Recovery Rectifier

Reverse Voltage – 50 to 600 V Forward Current –2 A

### FEATURES


- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Superfast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

### MECHANICAL DATA

- Case : SMB
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.055g / 0.002oz

### PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | Cathode     |
| 2   | Anode       |

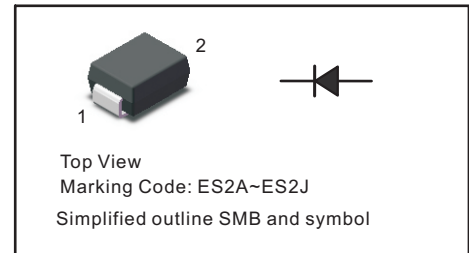


### Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

| Parameter                                                                                                          | Symbols                              | ES2AB<br>G | ES2BB<br>G | ES2CB<br>G | ES2DB<br>G | ES2EB<br>G | ES2GB<br>G | ES2JB<br>G | Units |
|--------------------------------------------------------------------------------------------------------------------|--------------------------------------|------------|------------|------------|------------|------------|------------|------------|-------|
| Maximum Repetitive Peak Reverse Voltage                                                                            | V <sub>RRM</sub>                     | 50         | 100        | 150        | 200        | 300        | 400        | 600        | V     |
| Maximum RMS voltage                                                                                                | V <sub>RMS</sub>                     | 35         | 70         | 105        | 140        | 210        | 280        | 420        | V     |
| Maximum DC Blocking Voltage                                                                                        | V <sub>DC</sub>                      | 50         | 100        | 150        | 200        | 300        | 400        | 600        | V     |
| Maximum Average Forward Rectified Current<br>at T <sub>c</sub> = 125 °C                                            | I <sub>F(AV)</sub>                   | 2          |            |            |            |            |            |            | A     |
| Peak Forward Surge Current 8.3 ms Single Half<br>Sine Wave Superimposed on Rated Load                              | I <sub>FSM</sub>                     | 60         |            |            |            |            |            |            | A     |
| Maximum Forward Voltage at 2 A                                                                                     | V <sub>F</sub>                       | 1          |            |            |            | 1.25       |            | 1.68       | V     |
| Maximum DC Reverse Current      T <sub>a</sub> = 25 °C<br>at Rated DC Blocking Voltage      T <sub>a</sub> =125 °C | I <sub>R</sub>                       | 5<br>100   |            |            |            |            |            |            | μA    |
| Typical Junction Capacitance<br>at V <sub>R</sub> =4V, f=1MHz                                                      | C <sub>j</sub>                       | 40         |            |            |            |            |            |            | pF    |
| Maximum Reverse Recovery Time <sup>(1)</sup>                                                                       | t <sub>rr</sub>                      | 35         |            |            |            |            |            |            | ns    |
| Typical Thermal Resistance <sup>(2)</sup>                                                                          | R <sub>θJA</sub><br>R <sub>θJC</sub> | 60<br>20   |            |            |            |            |            |            | °C/W  |
| Operating and Storage Temperature Range                                                                            | T <sub>j</sub> , T <sub>stg</sub>    | -55 ~ +150 |            |            |            |            |            |            | °C    |


( 1 ) Measured with  $I_F = 0.5\text{ A}$ ,  $I_R = 1\text{ A}$ ,  $I_{rr} = 0.25\text{ A}$ .

( 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.




# ES2ABG THRU ES2JBG


**Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram**

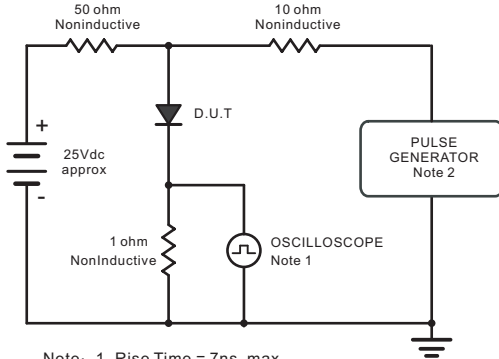


Note: 1. Rise Time = 7ns, max.  
Input Impedance = 1megohm, 22pF.  
2. Rise Time = 10ns, max.  
Source Impedance = 50 ohms.

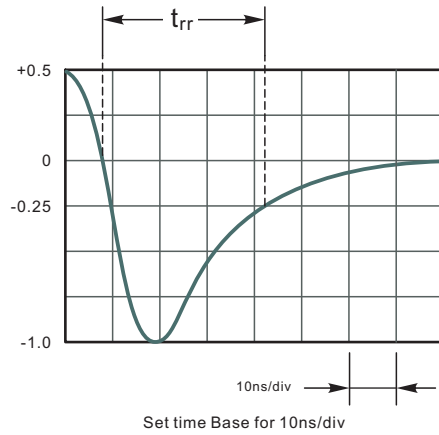


**Fig.2 Maximum Average Forward Current Rating**

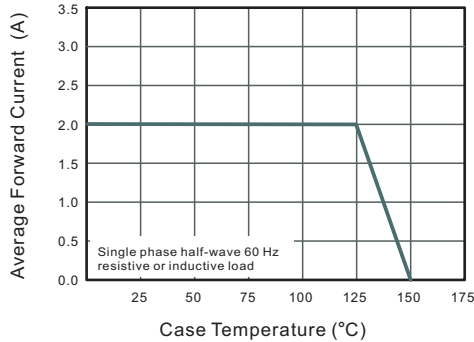


**Fig.4 Typical Forward Characteristics**

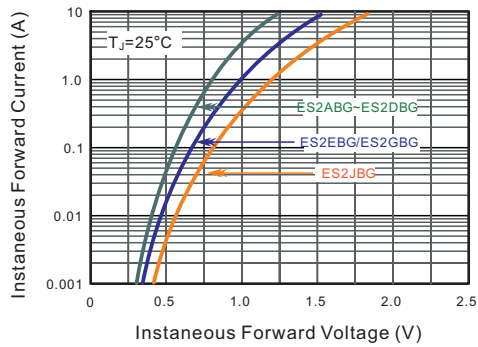


**Fig.3 Typical Reverse Characteristics**

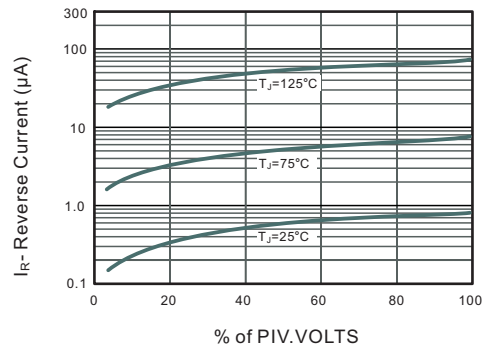


**Fig.5 Typical Junction Capacitance**

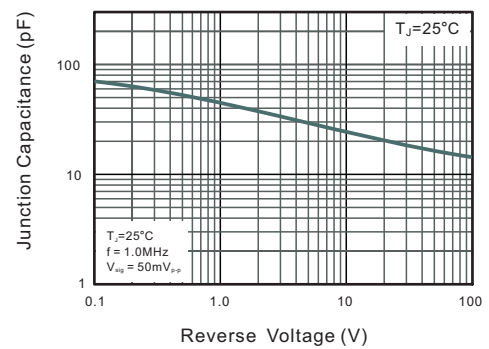

**Fig.6 Maximum Non-Repetitive Peak Forward Surge Current**

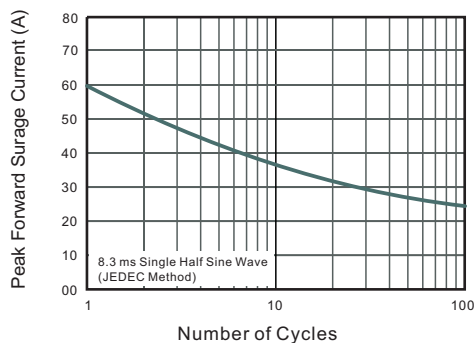






# ES2ABG THRU ES2JBG

## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SMB

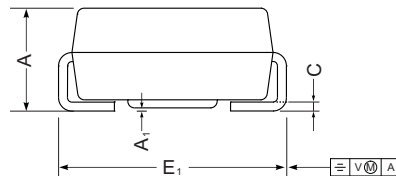

SMB mechanical data

| UNIT |     | A    | E    | D    | E <sub>1</sub> | A <sub>1</sub> | L   | C     | b   |
|------|-----|------|------|------|----------------|----------------|-----|-------|-----|
| mm   | max | 2.44 | 4.70 | 3.94 | 5.59           | 0.20           | 1.5 | 0.305 | 2.2 |
|      | min | 2.13 | 4.06 | 3.3  | 5.08           | 0.05           | 0.8 | 0.152 | 1.9 |
| mil  | max | 96   | 185  | 155  | 220            | 7.9            | 59  | 12    | 87  |
|      | min | 84   | 160  | 130  | 200            | 2.0            | 32  | 6     | 75  |

## The recommended mounting pad size

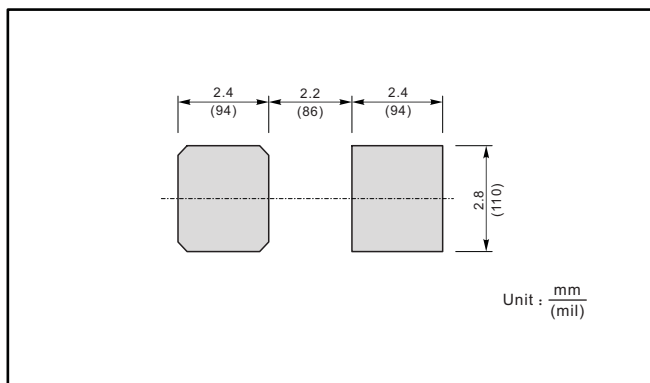

## Marking

| Type number | Marking code |
|-------------|--------------|
| ES2ABG      | ES2A         |
| ES2BBG      | ES2B         |
| ES2CBG      | ES2C         |
| ES2DBG      | ES2D         |
| ES2EBG      | ES2E         |
| ES2GBG      | ES2G         |
| ES2JBG      | ES2J         |