




ES8ACG THRU ES8JCG

Surface Mount Superfast Recovery Rectifier
Reverse Voltage – 50 to 600 V
Forward Current –8 A

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

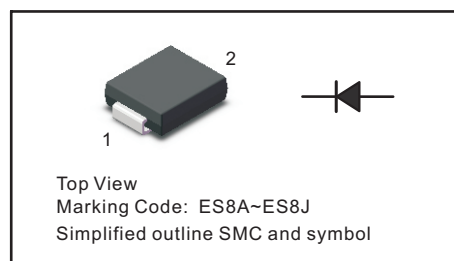

FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Superfast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case : SMC
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.22g / 0.0077oz

Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Parameter	Symbols	ES8ACG	ES8BCG	ES8CCG	ES8DCG	ES8ECG	ES8GCG	ES8JCG	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	V
Maximum Average Forward Rectified Current at T _c = 50 °C	I _{F(AV)}	8							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I _{FSM}	125							A
Maximum Forward Voltage at 8 A	V _F	0.98				1.3		1.7	V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _a = 25 °C T _a =125 °C	I _R	10 350							μA
Typical Junction Capacitance at V _R =4V, f=1MHz	C _j	90							pF
Maximum Reverse Recovery Time ⁽¹⁾	t _{rr}	35							ns
Typical Thermal Resistance ⁽²⁾	R _{θJA} R _{θJL}	75 20							°C/W
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150							°C


(1) Measured with $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $I_{rr} = 0.25\text{ A}$.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



ES8ACG THRU ES8JCG

Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram

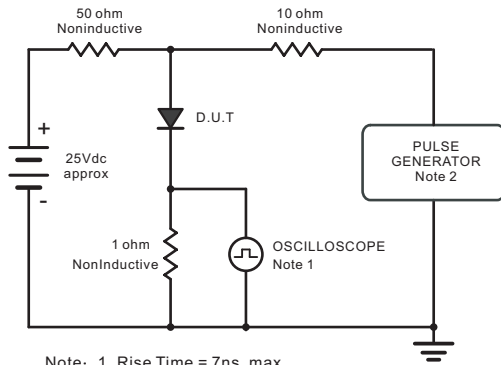

Note: 1. Rise Time = 7ns, max.
Input Impedance = 1megohm, 22pF.
2. Rise Time = 10ns, max.
Source Impedance = 50 ohms.

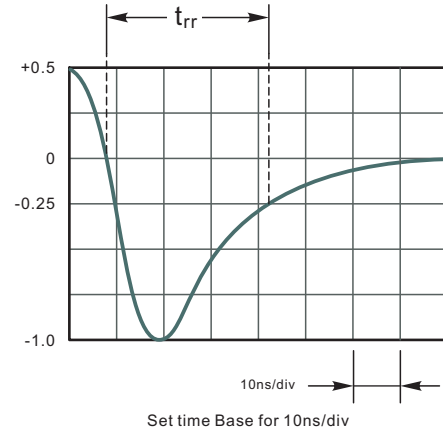


Fig.2 Maximum Average Forward Current Rating

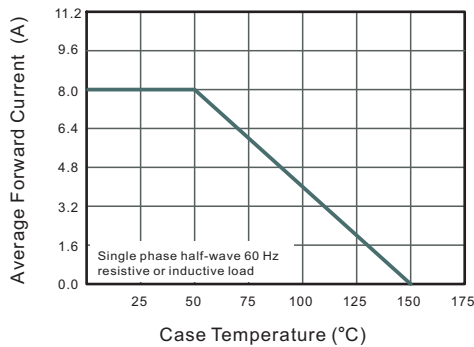


Fig.3 Typical Reverse Characteristics

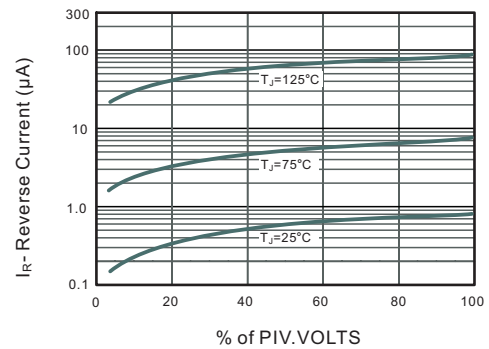


Fig.4 Typical Forward Characteristics

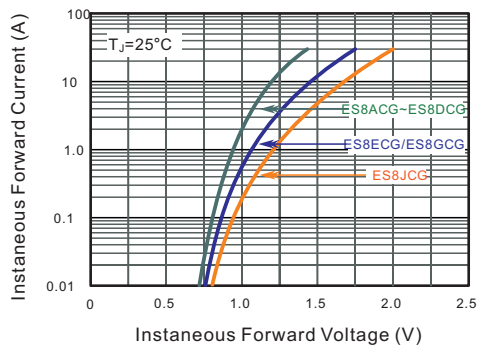


Fig.5 Typical Junction Capacitance


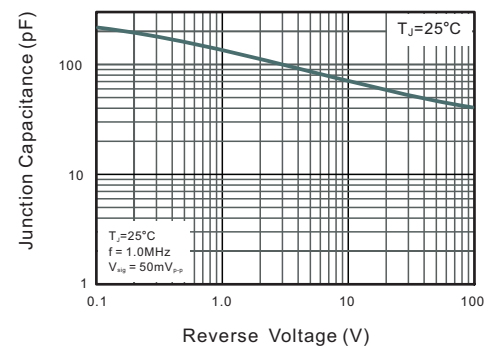


Fig.6 Maximum Non-Repetitive Peak Forward Surge Current



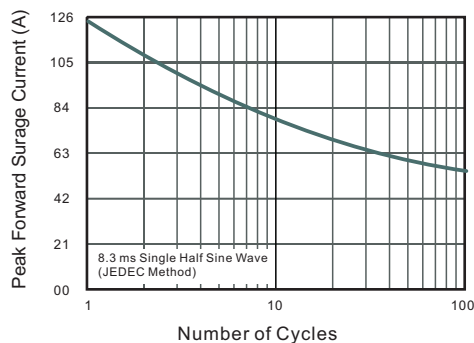


ES8ACG THRU ES8JCG

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SMC

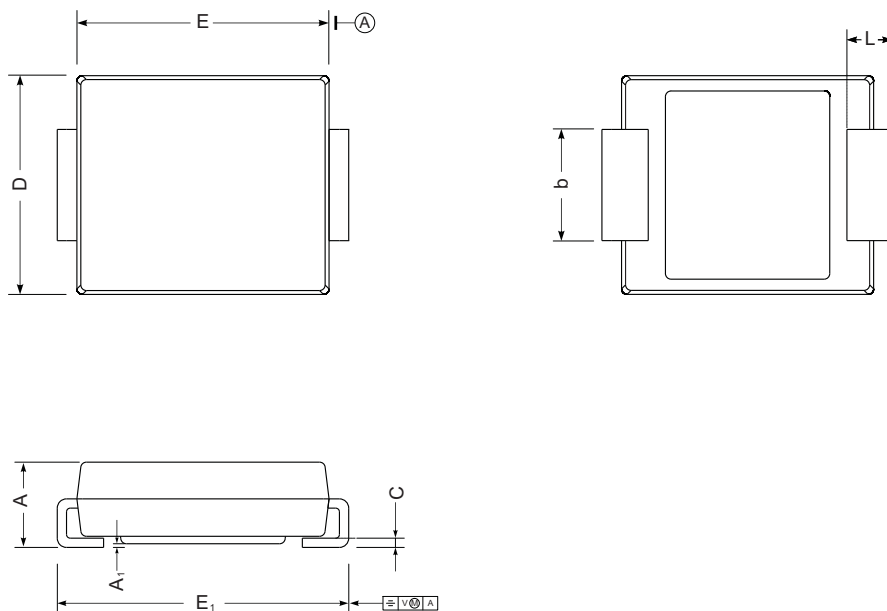

SMC mechanical data

UNIT		A	E	D	E ₁	A ₁	C	L	b
mm	max	2.62	7.0	6.2	8.0	0.21	0.31	1.6	3.25
	min	2.00	6.5	5.6	7.6	0.05	0.15	0.9	2.75
mil	max	103	276	244	315	8.3	12	63	128
	min	79	256	220	299	2.0	5.9	35	108

The recommended mounting pad size

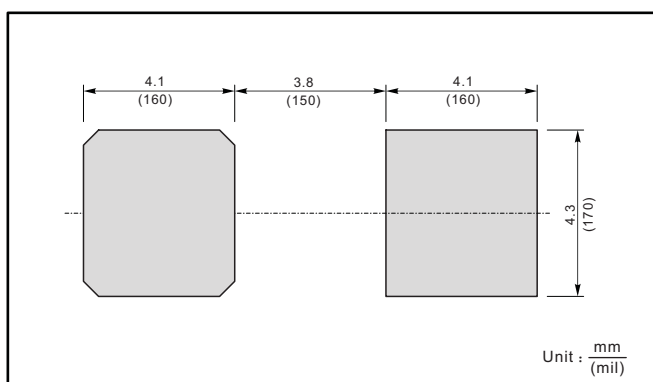

Marking

Type number	Marking code
ES8ACG	ES8A
ES8BCG	ES8B
ES8CCG	ES8C
ES8DCG	ES8D
ES8ECG	ES8E
ES8GCG	ES8G
ES8JCG	ES8J