



ESD0301PB

Low Capacitance TVS/ESD Protection Diode

Description

ESD0301PB is a low-capacitance Transient Voltage Suppressor (TVS) designed to provide electrostatic discharge (ESD) protection for data, control or power lines. With Maximum capacitance of 15pF, ESD0301PB is designed to protect parasitic-sensitive systems against over-voltage and over-current transient events. It complies with IEC 61000-4-2 (ESD), Level 4 ($\pm 15\text{kV}$ air, $\pm 8\text{kV}$ contact discharge), IEC 61000-4-4 (electrical fast transient - EFT) (40A, 5/50 ns), very fast charged device model (CDM) ESD and cable discharge event (CDE), etc.

ESD0301PB uses ultra-small DFN1006 package. Each ESD0301PB device can protect one data line. It offers system designers flexibility to protect single data line where space is a premium concern.

Ordering Information

- Device:ESD0301PB
- Package:DFN1006
- Marking:3PB
- Material:Halogen free
- Packing:Tape & Reel
- Quantity per reel:10,000pcs

Pin Configuration



Features

- Transient protection for high-speed data lines
- IEC61000-4-2(ESD) $\pm 15\text{kV}$ (air)
 $\pm 8\text{kV}$ (contact)
- IEC61000-4-4(EFT)40A(5/50ns)
Cable Discharge Event(CDE)
- Package optimized for high-speed lines
- Ultra-small package(1.0mmx0.6mmx0.4mm)
- Protects one data, control or power line
- Low capacitance: 15pF(Maximum)
- Low leakage current
- Low clamping voltage
- Each I/O pin can withstand over 1000 ESD strikes for $\pm 8\text{kV}$ contact discharge


Mechanical Data

- DFN1006 package
- Flammability Rating: UL 94V-0
- High temperature soldering guaranteed: $260^{\circ}\text{C}/10\text{s}$
- Packaging: Tape and Reel
- Reel size: 7 inch

Applications

- Portable Electronics
- Desktops, Servers and Notebooks
- Cellular Phones
- MP3 Ports
- Digital Ports
- Subscriber Identity Module(SIM) card

Circuit Diagram

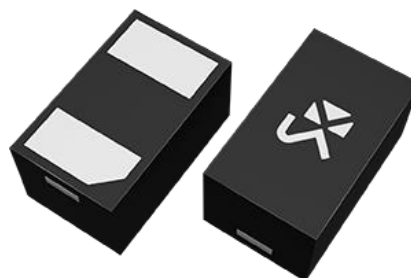



ESD0301PB


Maximum Rating

Parameter	Symbol	Value	Unit
ESD per IEC 61000-4-2(Air)	V_{ESD}	± 25	kV
ESD per IEC 61000-4-2(Contact)		± 20	
Peak Pulse Power(8/20 μ s)	P_{PP}	84	W
Operating Temperature	T_{OPT}	-55~+125	$^{\circ}C$
Storage Temperature	T_{STG}	-55~+150	$^{\circ}C$


Electrical Characteristics ($T_A=25^{\circ}C$)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				3.3	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	3.6			V
Reverse Leakage Current	I_R	$V_{RWM}=3.3V$			1.0	μA
Clamping Voltage	V_C	$I_{PP}=1A, t_p=8/20\mu s$			8.0	V
		$I_{PP}=7A, t_p=8/20\mu s$			12	V
Junction Capacitance	C_J	$V_R=0V, f=1MHz$			15	pF

Typical Characteristics

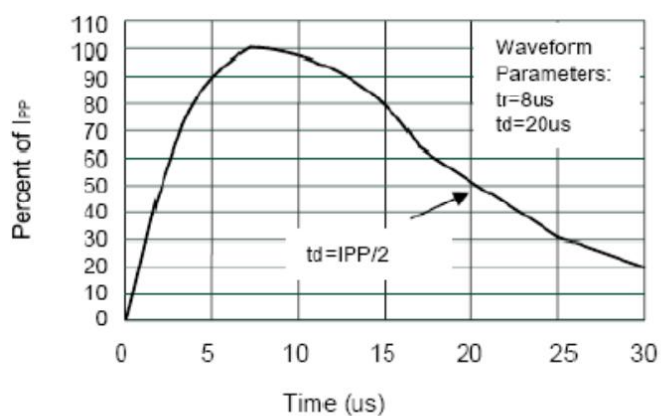

Pulse Waveform

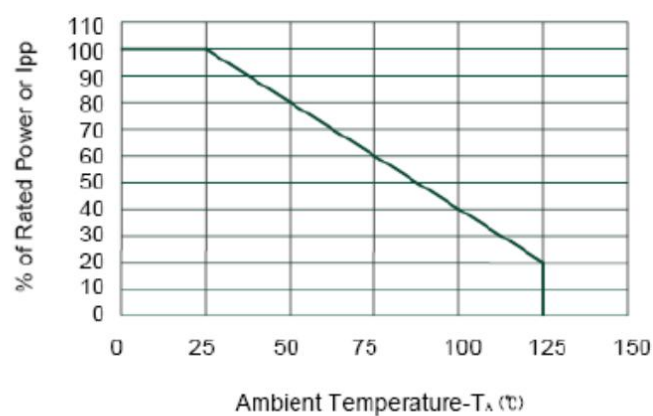


Power Derating Curve



Package Information


DFN1006


Dimensions in mm

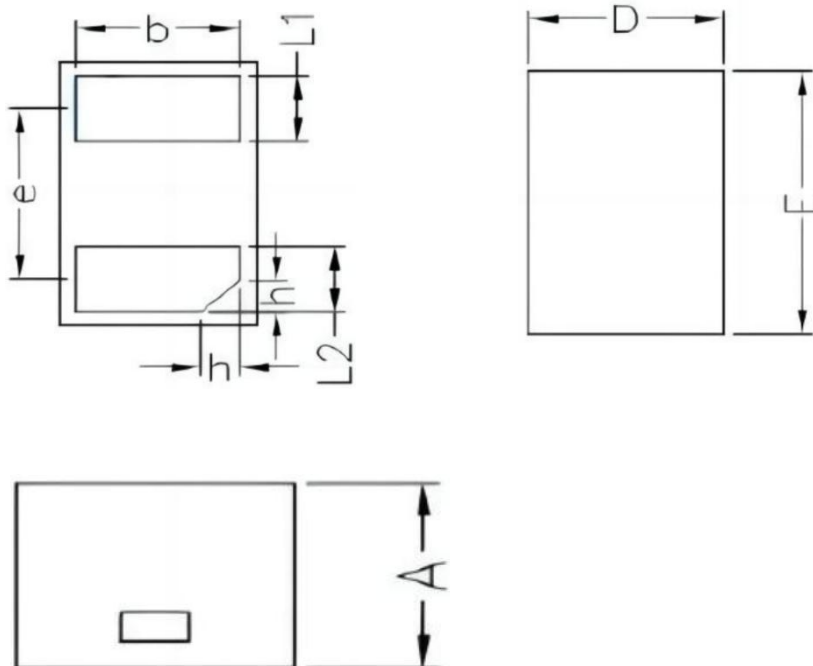

Symbol	Dimensions In Millimeters		
	Min	Nom	Max
D	0.55	0.60	0.65
E	0.95	1.00	1.05
L1	0.20	0.25	0.30
L2	0.20	0.25	0.30
b	0.45	0.50	0.55
e	0.65 BSC		
A	0.45	0.50	0.55
h	0.07	0.12	0.17

Soldering Footprint

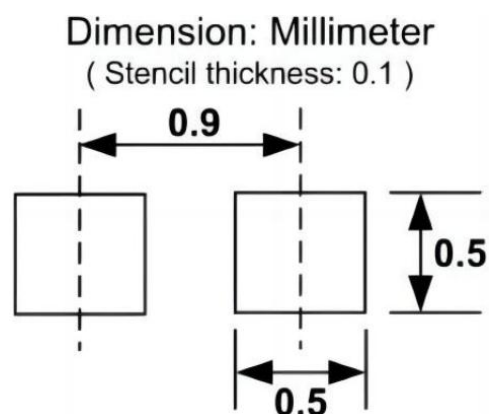



Shikues Disclaimer

1.Accuracy of Information and Right to Modify

The information provided in this document is for reference only. Shikues reserves the right to make changes to this document and to the specifications of the products described herein at any time, without prior notice, for the purpose of improving reliability, function, design, or for any other reason. It is the customer's responsibility to obtain and verify the latest product information and specifications before making any final design, procurement, or usage decisions.

2.No Warranty

Shikues makes no express or implied warranties, representations, or guarantees regarding the suitability of its products for any particular purpose.

Shikues assumes no liability for any assistance provided or for the design of customer products. All products are supplied "as is."

3.Intended Use and Limitation of Liability

The products described in this document are intended for use in general-purpose electronic devices. They are neither designed nor tested nor authorized for use in transportation equipment or applications requiring high reliability. Unless expressly authorized in writing by Shikues, these products must not be used as critical components in life-support systems or any applications where failure could directly pose a risk to human life (including, but not limited to, medical devices, transportation systems, aerospace equipment, nuclear facilities, and safety-critical systems).

Shikues assumes no responsibility or liability for any consequences arising from the use of its products in unauthorized or unintended applications.

Neither Shikues nor its representatives shall be held liable for any resulting damages.

4.Intellectual Property

This document does not grant any express or implied license—whether by estoppel, implication, or otherwise—to use any intellectual property rights of Shikues.