



# GBJ6AG THRU GBJ6MG



## GLASS PASSIVATED BRIDGE RECTIFIERS

REVERSE VOLTAGE - **50 to 1000** Volts

FORWARD CURRENT - **6.0** Amperes

### FEATURES

- Polarity:As marked on body
- Rating to 1000V PRV
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has U/L  
The flammability classification 94V-0
- Mounting position:Any
- Weight: 0.24 ounces , 6.79 grams



**GBJ**

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| CHARACTERISTICS                                                                                         | SYMBOL           | GBJ6AG      | GBJ6BG | GBJ6DG | GBJ6GG | GBJ6JG | GBJ6KG | GBJ6MG | UNIT             |
|---------------------------------------------------------------------------------------------------------|------------------|-------------|--------|--------|--------|--------|--------|--------|------------------|
| Maximum Recurrent Peak Reverse Voltage                                                                  | V <sub>RRM</sub> | 50          | 100    | 200    | 400    | 600    | 800    | 1000   | v                |
| Maximum RMS Voltage                                                                                     | V <sub>RMS</sub> | 35          | 70     | 140    | 280    | 420    | 560    | 700    | v                |
| Maximum DC Blocking Voltage                                                                             | V <sub>DC</sub>  | 50          | 100    | 200    | 400    | 600    | 800    | 1000   | v                |
| Maximum Average Forward Rectified Current<br>(with heatsink Note 2)                                     | I <sub>AV</sub>  | 6.0         |        |        |        |        |        |        | A                |
| Peak Forward Surge Current<br>8.3ms Single Half Sine-Wave<br>Super Imposed on Rated Load (JEDEC Method) | I <sub>FSM</sub> | 175         |        |        |        |        |        |        | A                |
| Maximum Forward Voltage at 3.0A DC                                                                      | V <sub>F</sub>   | 1.0         |        |        |        |        |        |        | V                |
| Maximum DC Reverse Current<br>at Rated DC Blocking Voltage                                              | I <sub>R</sub>   | 5.0<br>500  |        |        |        |        |        |        | uA               |
| I <sup>2</sup> t Rating for Fusing (t<8.3ms)                                                            | I <sup>2</sup> t | 166         |        |        |        |        |        |        | A <sup>2</sup> s |
| Typical Junction Capacitance Per Element (Note1)                                                        | C <sub>J</sub>   | 50          |        |        |        |        |        |        | pF               |
| Typical Thermal Resistance (Note2)                                                                      | R <sub>θJC</sub> | 2.5         |        |        |        |        |        |        | °C/W             |
| Operating Temperature Range                                                                             | T <sub>J</sub>   | -55 to +150 |        |        |        |        |        |        | °C               |
| Storage Temperature Range                                                                               | T <sub>STG</sub> | -55 to +150 |        |        |        |        |        |        | °C               |

NOTES: 1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2.Device mounted on 150mm\*150mm\*1.6mm Cu Plate Heatsink.



# GBJ6AG THRU GBJ6MG

FIG.1-FORWARD CURRENT DERATING CURVE

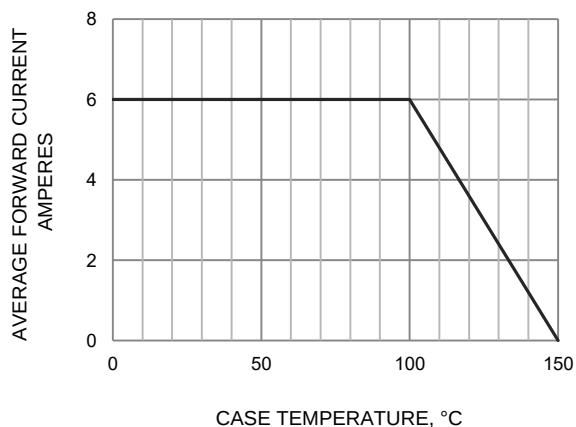


FIG.2-MAXIMUM FOWARD SURGE CURRENT

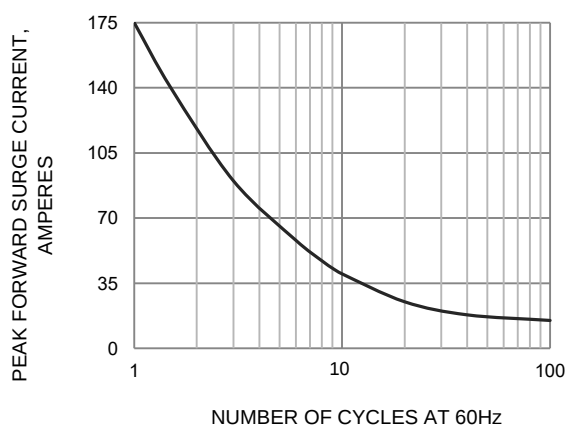


FIG.3-TYPICAL JUNCTION CAPACITANCE

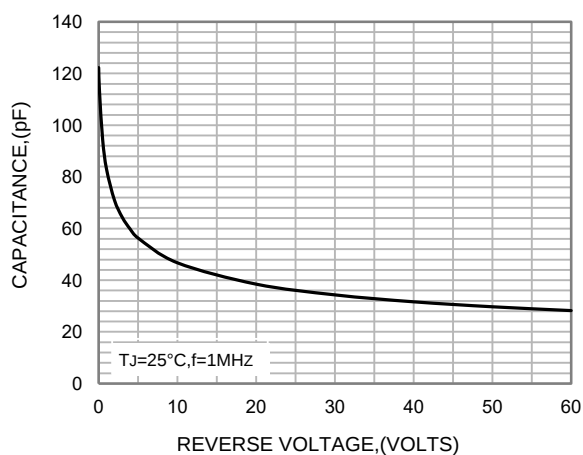


FIG.4-TYPICAL FORWARD CHARACTERISTICS




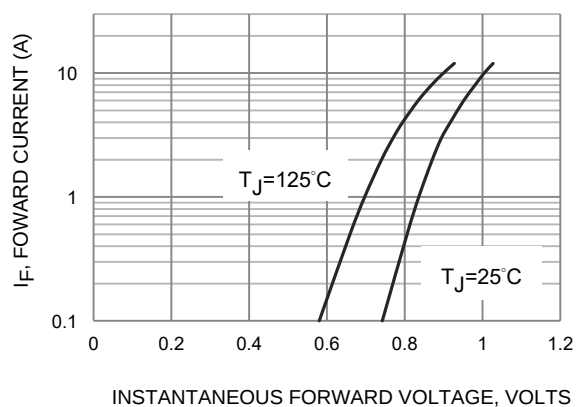


FIG.5-TYPICAL REVERSE CHARACTERISTICS

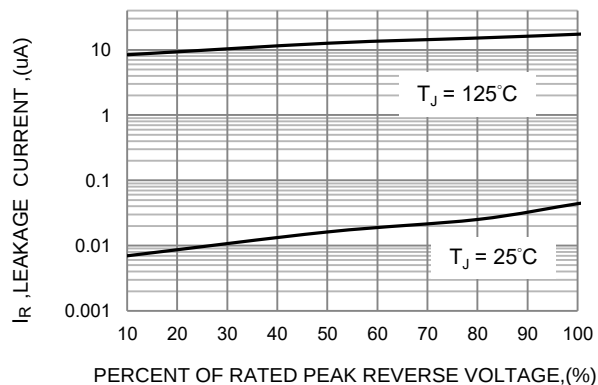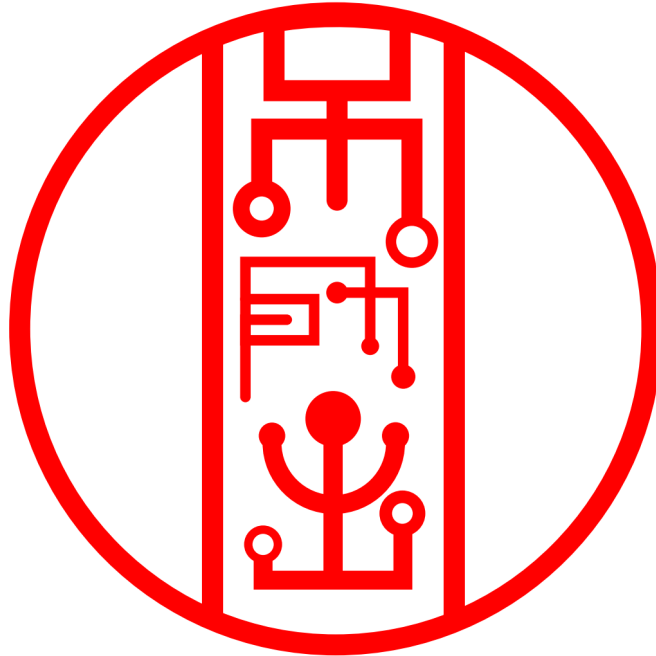

## GBJ Package Outline Dimensions



GBJ mechanical data

| UNIT |     | A     | B     | C    | D     | E    | F    | G    | H    | I    | J    | K    | L    | M     | N    | O    | P    |
|------|-----|-------|-------|------|-------|------|------|------|------|------|------|------|------|-------|------|------|------|
| mm   | max | 30.30 | 20.30 | 3.80 | 18.00 | 2.90 | 0.80 | 11.2 | 4.80 | 5.80 | 4.20 | 2.40 | 1.15 | 10.20 | 7.70 | C3.0 | φ3.6 |
|      | min | 29.70 | 19.70 | 3.40 | 17.00 | 2.50 | 0.55 | 10.8 | 4.40 | 4.80 | 3.80 | 2.00 | 0.90 | 9.80  | 7.30 |      | φ3.0 |
| mil  | max | 1193  | 799   | 150  | 709   | 114  | 31   | 441  | 189  | 228  | 165  | 94   | 45   | 402   | 303  | C118 | φ142 |
|      | min | 1169  | 776   | 134  | 669   | 98   | 22   | 425  | 173  | 189  | 150  | 79   | 35   | 386   | 287  |      | φ118 |