




LMV321A

Rail-to-Rail Low Power Single Operational Amplifiers

Features

- Low power consumption: 45uA
- Rail-to-rail output swing
- No crossover distortion
- Supply voltage range: 2.1V to 5.5V
- Slew rate: 0.5V/us
- Gain bandwidth product: 1.5MHz

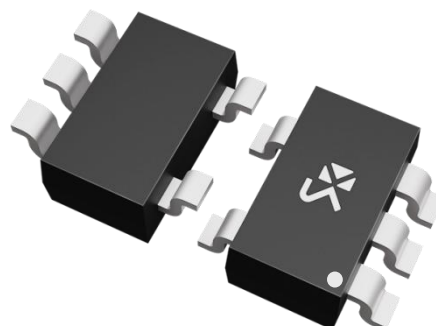

Applications

- Desktop computers
- HVAC
- Motor Control: AC induction
- Portable media players
- Professional audio mixers
- Refrigerators


SOT-23-5

Description

The LMV321 is a low-power single operational amplifier featuring rail-to-rail output swing. It offers a cost-effective solution for applications requiring low supply voltage, small footprint, and low cost. Specifically designed for low-voltage operation, the LMV321 can operate at a minimum supply voltage as low as 2.1V, with a maximum recommended supply voltage of 5.5V.

The LMV321 is available in the SOT23-5 package.


Block Diagram

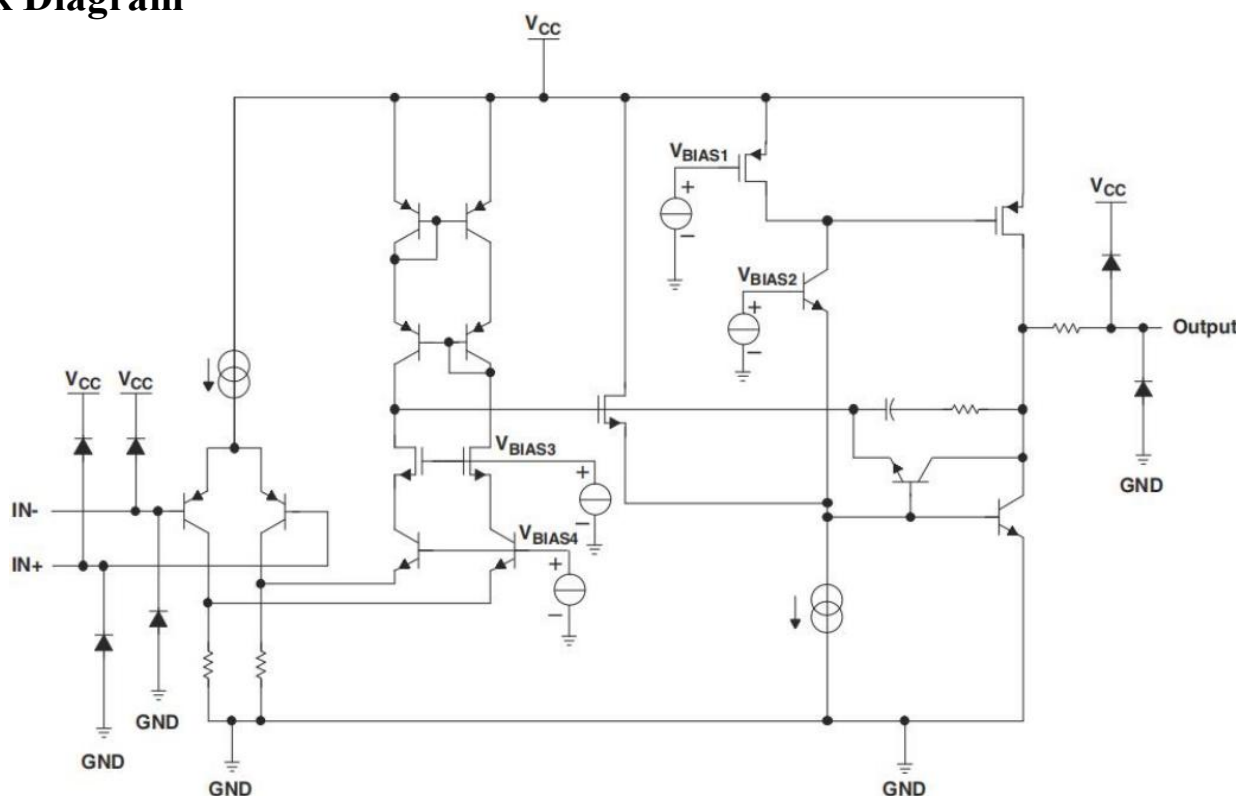



LMV321A

Pin Description

Pin Number	Pin Name	I/O	Description	Pin Configuration Diagram
1	1IN+	I	Non-inverting input	
2	GND	P	Negative supply	
3	1IN-	I	Inverting input	
4	OUT	O	Output	
5	VCC+	P	Positive supply	

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Supply Voltage	V_{CC}	2.1~5.5	V
Differential Input Voltage	V_{ID}	± 5.5	V
Common-mode Input Voltage	V_{ICM}	$-0.5 \sim V_{CC} + 0.5V$	V
Maximum Operating Junction Temperature	T_J	150	$^{\circ}\text{C}$
Operating Ambient Temperature	T_A	$-20 \sim +85$	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	$-65 \sim +150$	$^{\circ}\text{C}$
Lead Temperature(Soldering , 10 s)	T_W	260	$^{\circ}\text{C}$





Electrical Characteristics($T_A=25^{\circ}\text{C}$ $V_{CC}=2.7V$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Input Offset Voltage	V_{IO}			± 0.2	± 5	mV
Input Offset Current	I_{IO}			± 10		nA
Input Bias Current	I_B			± 10		pA
Input Common-mode Voltage Range	V_{ICM}	$V_{CC} = 5.5V$	-0.1		5.6	V
Open-loop Voltage Gain	A_{OL}	$R_L=5K\Omega, V_O=0.1 \sim 4.9V$	70	90		dB
		$R_L=100K\Omega, V_O=0.035 \sim 4.965V$	80	94		dB
Common-mode Rejection Ratio	CMRR	$V_{CC}=5.5V, V_{ICM}=-0.1 \sim 4V$	62	90		dB
		$V_{CC}=5.5V, V_{ICM}=-0.1 \sim 5.6V$	56	88		dB
Power Supply Rejection Ratio	PSRR	$V_{CC}=+2.5V \sim 5.5V, V_{ICM}=0.5V$	60	80		dB
Output Voltage Swing	$V_{(OH)}$	$R_L=10K\Omega$, Referenced to 1.35V	$V_{CC}-100$	$V_{CC}-10$		mV
	$V_{(OL)}$			80		
Output Short-circuit Current	I_{SC}			50		mA
Supply Current	I_{CC}			45		μA
Gain Bandwidth Product	GBWP			1.5		MHz
Slew Rate	S_R			0.5		V/ μS



LMV321A

Typical Applications

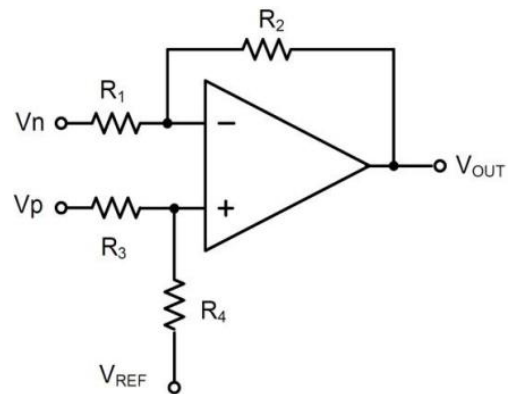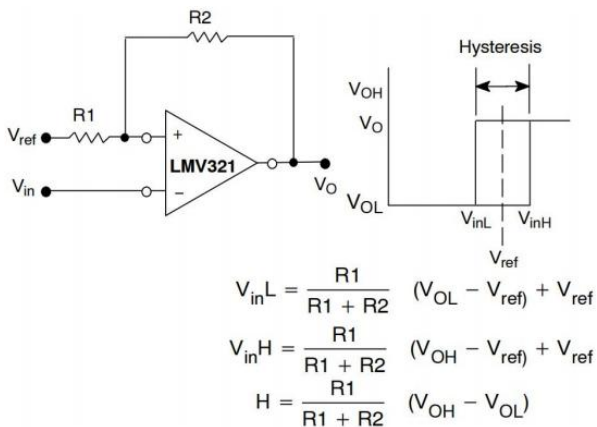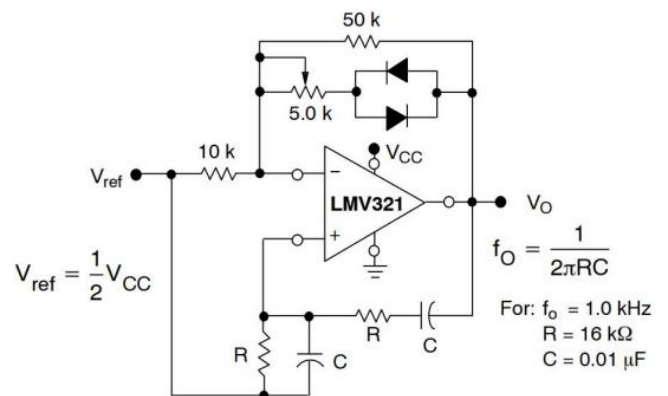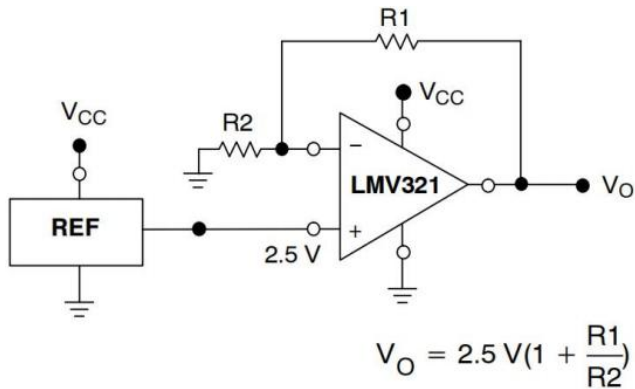

Typical Characteristics

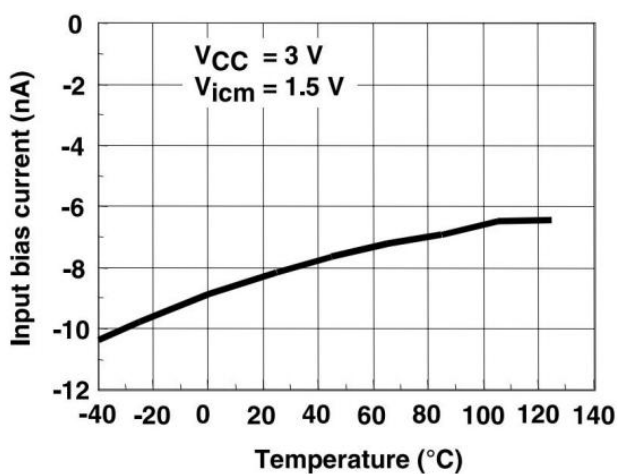


Fig.5 Input Bias Current vs. Temperature($V_{CC}=3\text{V}$)

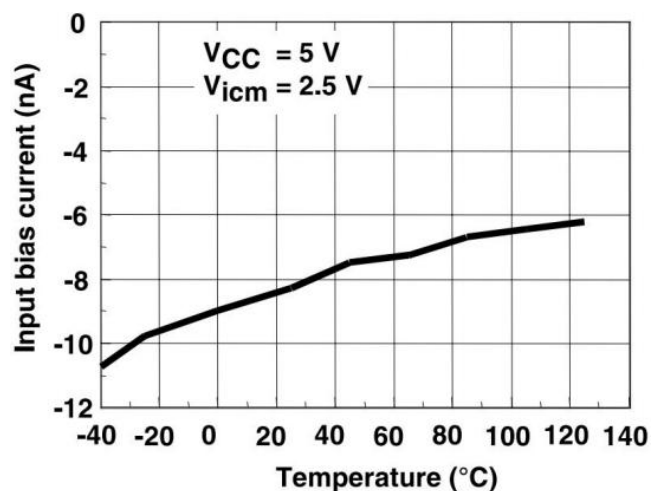


Fig.6 Input Bias Current vs. Temperature($V_{CC}=5\text{V}$)



LMV321A

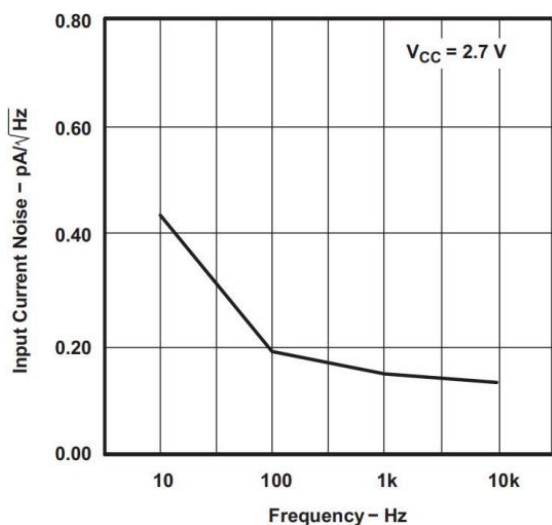


Fig.7 Input Current Noise vs. Frequency(V_{CC}=2.7V)

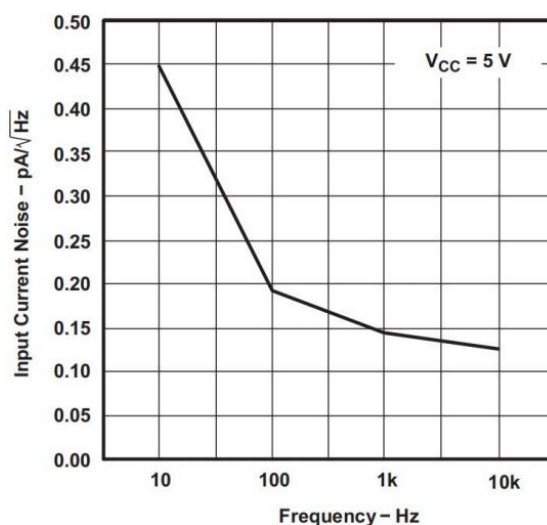


Fig.8 Input Current Noise vs. Frequency(V_{CC}=5V)

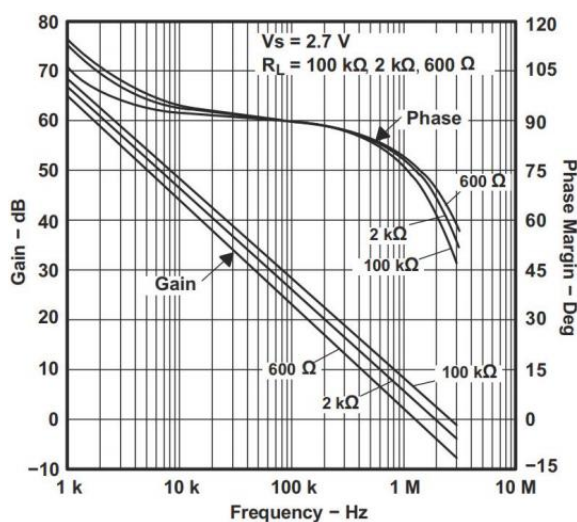


Fig.9 Frequency Response vs. Resistive Load(V_{CC}=2.7V)

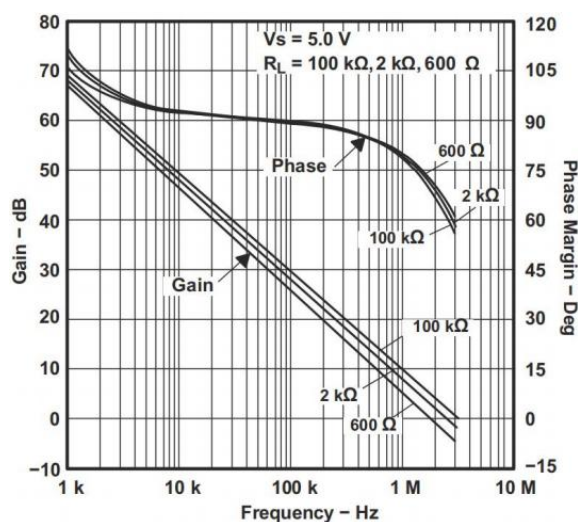


Fig.9 Frequency Response vs. Resistive Load(V_{CC}=5V)

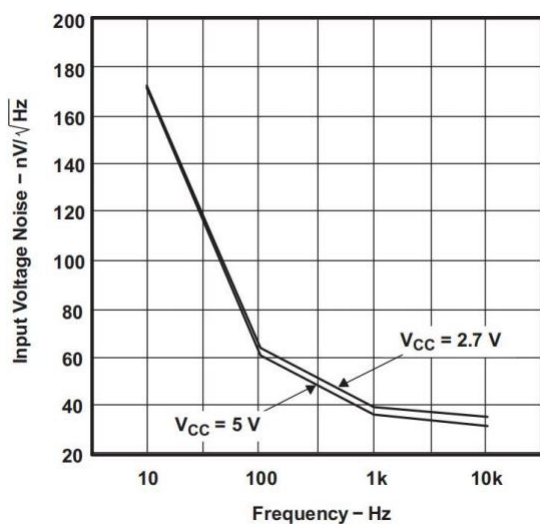


Fig.11 Input Voltage Noise vs. Frequency




LMV321A

Package Information

SOT-23-5

Dimensions in mm

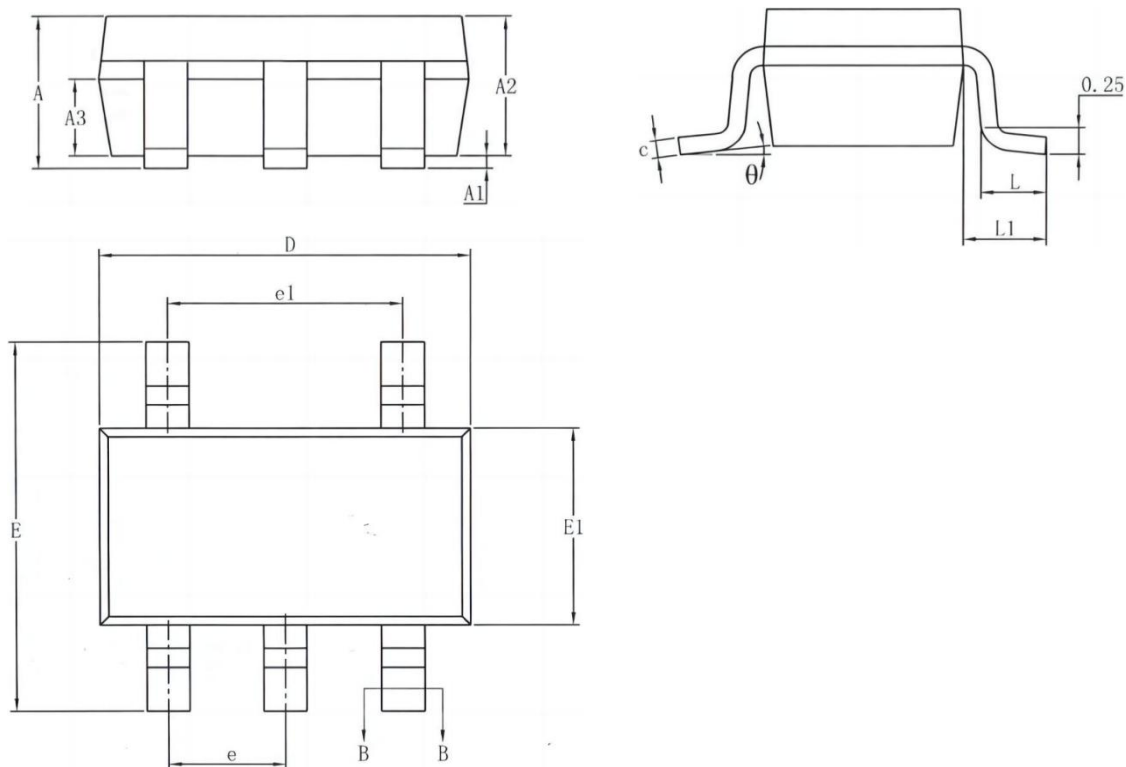

Symbol	Dimensions In Millimeters			Symbol	Dimensions In Millimeters		
	Min	Nom	Max		Min	Nom	Max
A	-	-	1.25	D	2.82	2.92	3.02
A1	0.04	-	0.10	E	2.60	2.80	3.00
A2	1.00	1.10	1.20	E1	1.50	1.60	1.70
A3	0.60	0.65	0.70	e	0.95 BSC		
b	0.33	-	0.41	e1	1.90 BSC		
b1	0.32	0.35	0.38	L	0.30	-	0.60
c	0.15	-	0.19	L1	0.60 REF		
c1	0.14	0.15	0.16	θ	0°	-	8°



Shikues Disclaimer

1.Accuracy of Information and Right to Modify

The information provided in this document is for reference only. Shikues reserves the right to make changes to this document and to the specifications of the products described herein at any time, without prior notice, for the purpose of improving reliability, function, design, or for any other reason. It is the customer's responsibility to obtain and verify the latest product information and specifications before making any final design, procurement, or usage decisions.

2.No Warranty

Shikues makes no express or implied warranties, representations, or guarantees regarding the suitability of its products for any particular purpose.

Shikues assumes no liability for any assistance provided or for the design of customer products. All products are supplied "as is."

3.Intended Use and Limitation of Liability

The products described in this document are intended for use in general-purpose electronic devices. They are neither designed nor tested nor authorized for use in transportation equipment or applications requiring high reliability. Unless expressly authorized in writing by Shikues, these products must not be used as critical components in life-support systems or any applications where failure could directly pose a risk to human life (including, but not limited to, medical devices, transportation systems, aerospace equipment, nuclear facilities, and safety-critical systems).

Shikues assumes no responsibility or liability for any consequences arising from the use of its products in unauthorized or unintended applications.

Neither Shikues nor its representatives shall be held liable for any resulting damages.

4.Intellectual Property

This document does not grant any express or implied license—whether by estoppel, implication, or otherwise—to use any intellectual property rights of Shikues.