



# LMV721/LMV722/LMV724

## 10MHz, RRIO, CMOS, Op Amps

### Description

The LMV721, LMV722, LMV724 families of products offer low voltage operation and rail-to-rail input and output, as well as excellent speed/power consumption ratio, providing an excellent bandwidth(10MHz) and slew rate (8.5V/us). The operational amplifiers are unity gain stable and feature an ultra-low input bias current.

The LMV721, LMV722, LMV724 has lower offset voltage, which is guaranteed not upper than 0.5mV at 25°C with  $V_S = 5V$ ,  $V_{CM} = V_S/2$ .

The LMV721, LMV722, LMV724 families of operational amplifiers under single supplies of 2.1V to 5.5V or dual power supplies of  $\pm 1.05V$  to  $\pm 2.75V$ . The devices are ideal for sensor interfaces, active filters and portable applications.


### Features

- High gain bandwidth: 10MHz
- Excellent slew rate: 8.5V/us
- Rail-to-rail input and output
- Lower offset voltage:  $\pm 3mV$  Max
- Input voltage range: -0.2V to 5.7V with  $V_S = 5.5V$
- Supply range: 2.1V to 5.5V
- Operating range: -40°C to 125°C
- Packages: SOT-23-5/SOP-8/SOP-14

### Applications

- Sensors
- Active Filters
- Test Equipment
- Driving A/D Converters
- Photodiode Amplification

### Pin Configuration

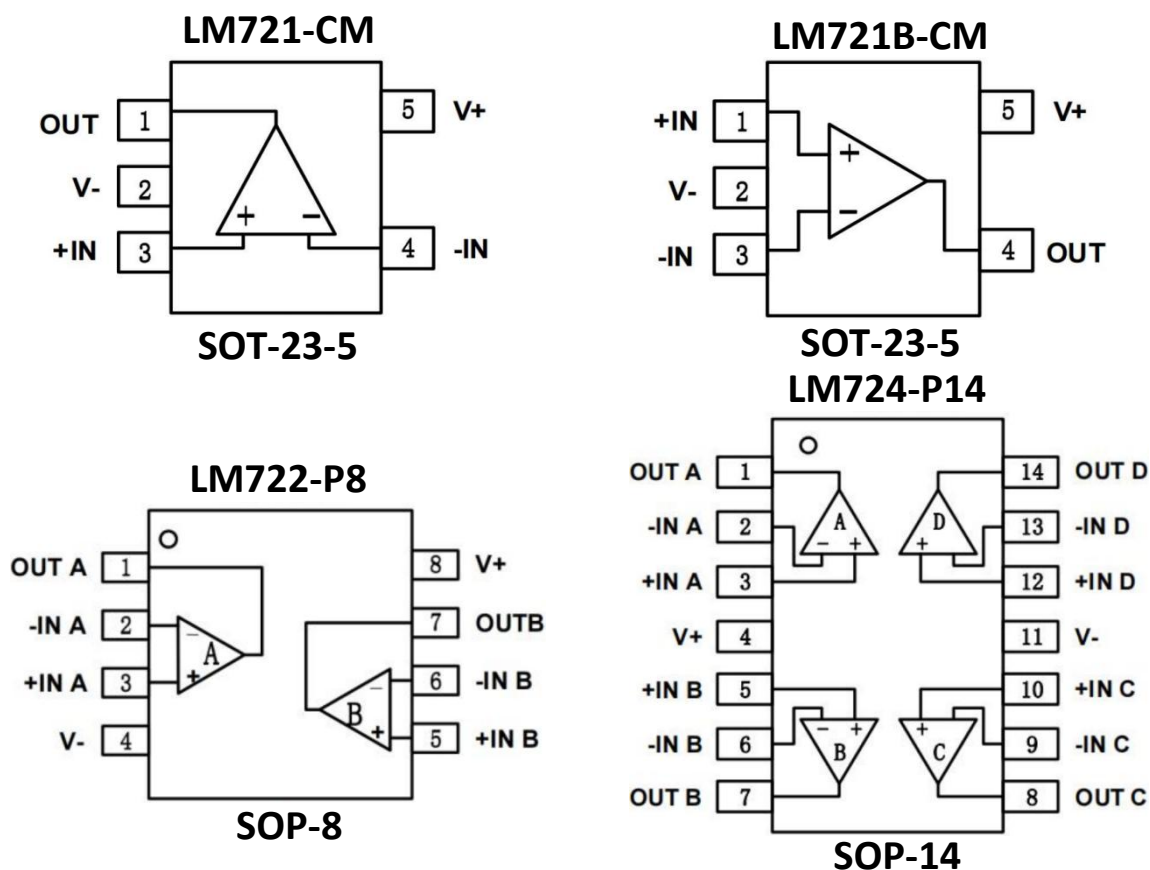



# LMV721/LMV722/LMV724

## Ordering Information

| Type       | Marking | Package  |
|------------|---------|----------|
| LMV721-CM  | LMV721  | SOT-23-5 |
| LMV721B-CM | -       | SOT-23-5 |
| LMV722-P8  | LMV722  | SOP-8    |
| LMV724-P14 | LMV724  | SOP-14   |

## Absolute Maximum Ratings

Over operating free-air temperature range(unless otherwise noted)<sup>(1)</sup>

| Parameter                            | Symbol    | Min      | Max      | Unit |
|--------------------------------------|-----------|----------|----------|------|
| Supply Voltage, $V_S = (V+) - (V-)$  | $V_S$     |          | 7        | V    |
| Signal Input Voltage <sup>(2)</sup>  | $V_{IN}$  | (V-)-0.5 | (V+)+0.5 | V    |
| Signal Output Voltage <sup>(3)</sup> | $V_{OUT}$ | (V-)-0.5 | (V+)+0.5 | V    |
| Signal Input Current                 | $I_{IN}$  | -10      | 10       | mA   |
| Signal Output Current                | $I_{OUT}$ | -150     | 150      | mA   |
| Maximum Junction Temperature         | $T_J$     |          | 150      | °C   |
| Storage Temperature Range            | $T_{STG}$ | -65      | 150      | °C   |

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5V beyond the supply rails should be current-limited to 10mA or less.

Note 3: Output terminals are diode-clamped to the power-supply rails. Output signals that can swing more than 0.5V beyond the supply rails should be current-limited to  $\pm 150$ mA or less.

## ESD Ratings

| Parameter               |                        | Symbol      | Value      | Unit |
|-------------------------|------------------------|-------------|------------|------|
| Electrostatic Discharge | Human-body model (HBM) | $V_{(ESD)}$ | $\pm 4500$ | V    |

## Recommended Operating Conditions

Over operating free-air temperature range(unless otherwise noted)

| Parameter                           |               | Symbol | Min  | Typ | Max  | Unit |
|-------------------------------------|---------------|--------|------|-----|------|------|
| Supply Voltage, $V_S = (V+) - (V-)$ | Signal-supply | $V_S$  | 2.1  |     | 5.5  | V    |
|                                     | Dual-supply   |        | 1.05 |     | 2.75 | V    |
| Operating Temperature Range         |               | $T_A$  | -40  | 25  | 125  | °C   |



# LMV721/LMV722/LMV724

## Electrical Characteristics( $T_A=25^{\circ}\text{C}$ $V_{CC}=2.7\text{V}$ unless otherwise noted)

| Parameter                          | Symbol           | Test Condition                                       | Min  | Typ  | Max | Unit   |
|------------------------------------|------------------|------------------------------------------------------|------|------|-----|--------|
| Power Supply                       |                  |                                                      |      |      |     |        |
| Operating Voltage Range            | V <sub>S</sub>   |                                                      | 2.1  |      | 5.5 | V      |
| Quiescent Current/Amplifier        | I <sub>Q</sub>   | V <sub>S</sub> =5V,IN+=V-,IN-=OUT                    |      | 0.4  |     | mA     |
| Power-Supply Rejection Ration      | PSRR             | V <sub>S</sub> =2.5V~5.5V,V <sub>CM</sub> =(V-)+0.5V | 75   |      |     | dB     |
| Turn-on Time                       | t <sub>ON</sub>  |                                                      |      | 12   |     | μs     |
| Input                              |                  |                                                      |      |      |     |        |
| Input Offset Voltage               | V <sub>OS</sub>  | V <sub>CM</sub> =V <sub>S</sub> /2,LMV721            | -3   | ±0.2 | 3   | mV     |
|                                    |                  | V <sub>CM</sub> =V <sub>S</sub> /2,LMV722            | -3   | ±0.2 | 3   |        |
|                                    |                  | V <sub>CM</sub> =V <sub>S</sub> /2,LMV724            | -3   | ±0.3 | 3   |        |
| Input Offset Voltage Average Drift | ΔV <sub>OS</sub> | T <sub>A</sub> =-40°C~125°C                          |      | ±2.6 |     | μV/°C  |
| Input Bias Current                 | I <sub>B</sub>   |                                                      | -10  | ±1   | 10  | pA     |
| Input Offset Current               | I <sub>OS</sub>  |                                                      | -10  | ±1   | 10  | pA     |
| Common-Mode Voltage Range          | V <sub>CM</sub>  | V <sub>S</sub> =5.5V                                 | -0.2 |      | 5.7 | V      |
| Common-Mode Rejection Ration       | CMRR             | V <sub>S</sub> =5.5V,V <sub>CM</sub> =-0.2V~4V       | 70   |      |     | dB     |
|                                    |                  | V <sub>S</sub> =5.5V,V <sub>CM</sub> =-0.2V~5.7V     | 65   |      |     |        |
| Output                             |                  |                                                      |      |      |     |        |
| Open-Loop Voltage Gain             | A <sub>OL</sub>  | R <sub>L</sub> =2KΩ,V <sub>OUT</sub> =0.15V~4.85V    | 86   |      |     | dB     |
|                                    |                  | R <sub>L</sub> =10KΩ,V <sub>OUT</sub> =0.05V~4.95V   | 96   |      |     |        |
| Output Swing From Rail             |                  | R <sub>L</sub> =2KΩ                                  |      | 50   |     | mV     |
|                                    |                  | R <sub>L</sub> =10KΩ                                 |      | 10   |     |        |
| Output Current Source              | I <sub>OUT</sub> |                                                      |      | 140  |     | mA     |
| Frequency Response                 |                  |                                                      |      |      |     |        |
| Slew Rate                          | SR               |                                                      |      | 8.5  |     | V/μs   |
| Gain-Bandwidth Product             | GBP              |                                                      |      | 10   |     | MHz    |
| Phase Margin                       | PM               |                                                      |      | 62   |     | °      |
| Setting Time,0.1%                  | ts               |                                                      |      | 0.5  |     | μs     |
| Overload Recovery Time             |                  | V <sub>IN</sub> *Gain≥V <sub>S</sub>                 |      | 3.2  |     | μs     |
| Noise                              |                  |                                                      |      |      |     |        |
| Input Voltage Noise Density        | en               | f=1KHz                                               |      | 9.5  |     | nV/√Hz |
|                                    |                  | f=10KHz                                              |      | 6.5  |     | nV/√Hz |



# LMV721/LMV722/LMV724

## Typical Characteristics

At  $T_A=25^{\circ}\text{C}$ ,  $V_S=5\text{V}$ ,  $R_L=10\text{K}\Omega$  connected to  $V_S/2$ .  $V_{OUT}=V_S/2$ , unless otherwise noted.

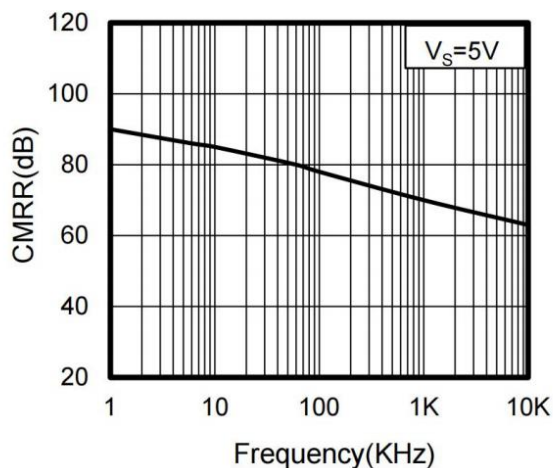


Figure 1. Common-Mode Rejection Ratio vs Frequency

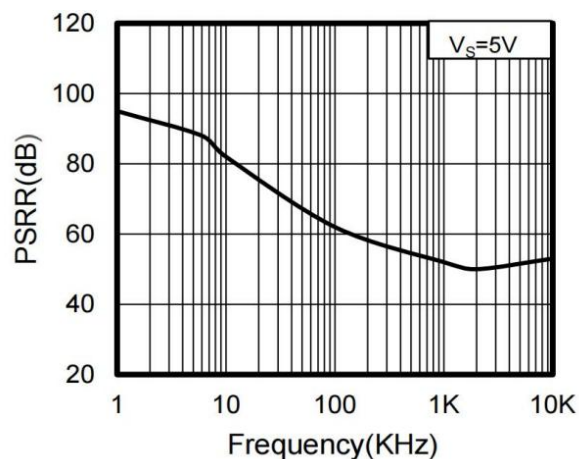


Figure 2. Power-Supply Rejection Ratio vs Frequency

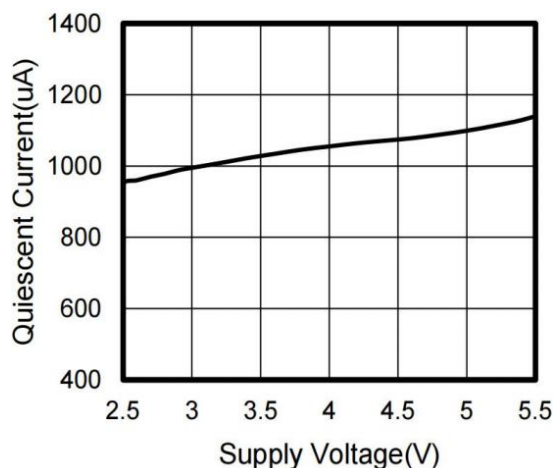


Figure 3. Quiescent Current vs Supply Voltage

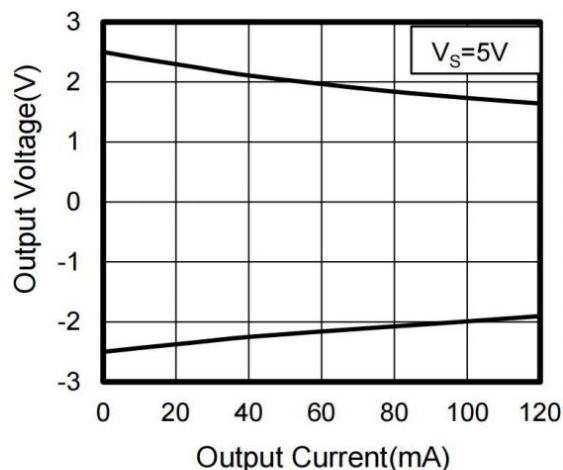


Figure 4. Output Voltage vs Output Current

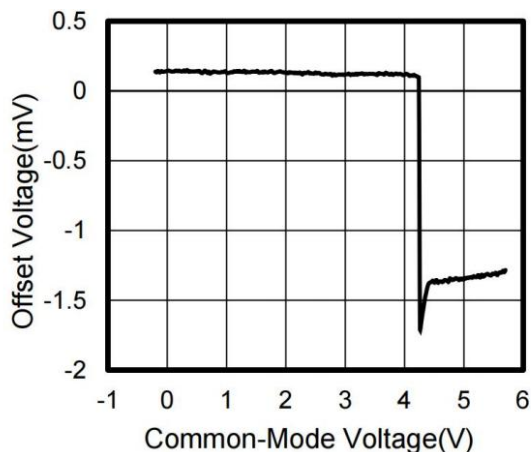


Figure 5. Offset Voltage vs Common-Mode Voltage

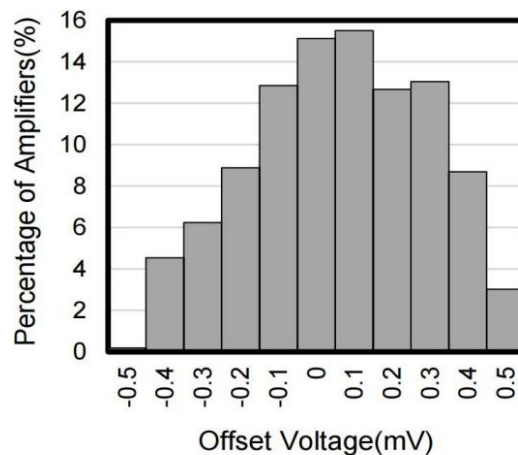


Figure 6. Offset Voltage Production Distribution



# LMV721/LMV722/LMV724

## Layout

### Layout Guideline

Attention to good layout practices is always recommended. Keep traces short. When possible, use a PCB ground plane with surface-mount components placed as close to the device pins as possible.

Place a 0.1 $\mu$ F capacitor closely across the supply pins.

These guidelines should be applied throughout the analog circuit to improve performance and provide benefits such as reducing the EMI susceptibility.

### Layout Example

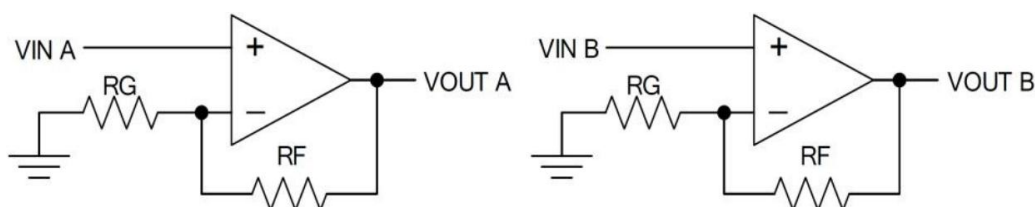


Figure 7. Schematic Representation

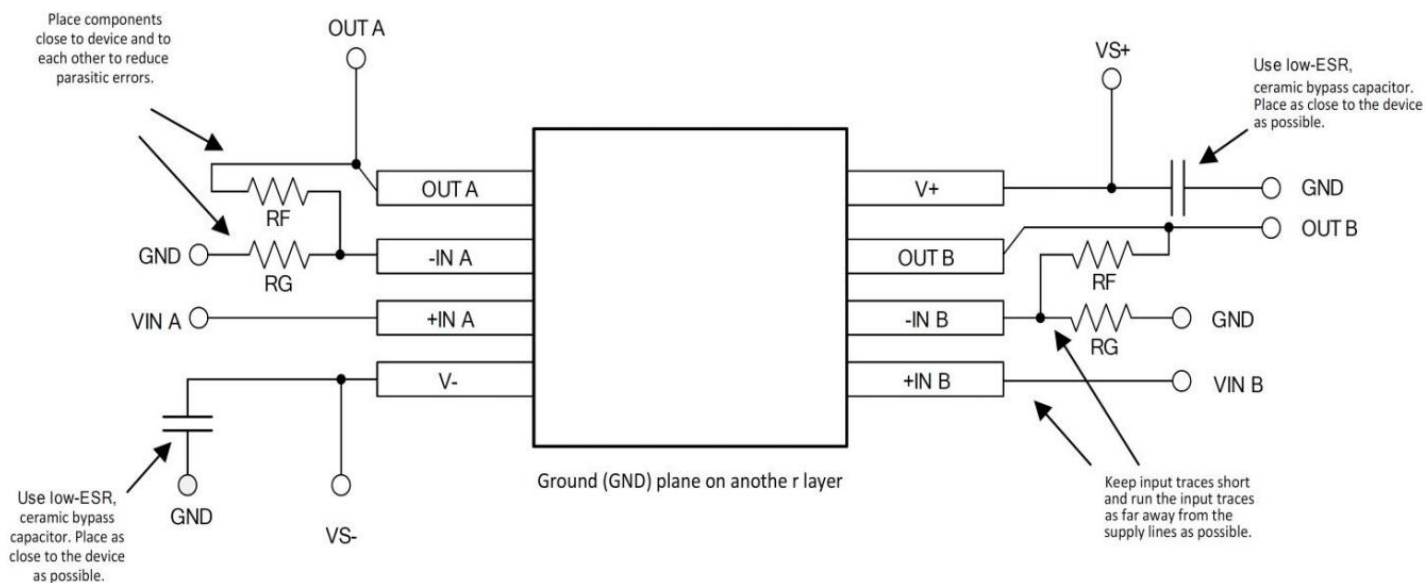


Figure 8. Layout Example




# LMV721/LMV722/LMV724

## Package Information

### SOT-23-5

### Dimensions in mm

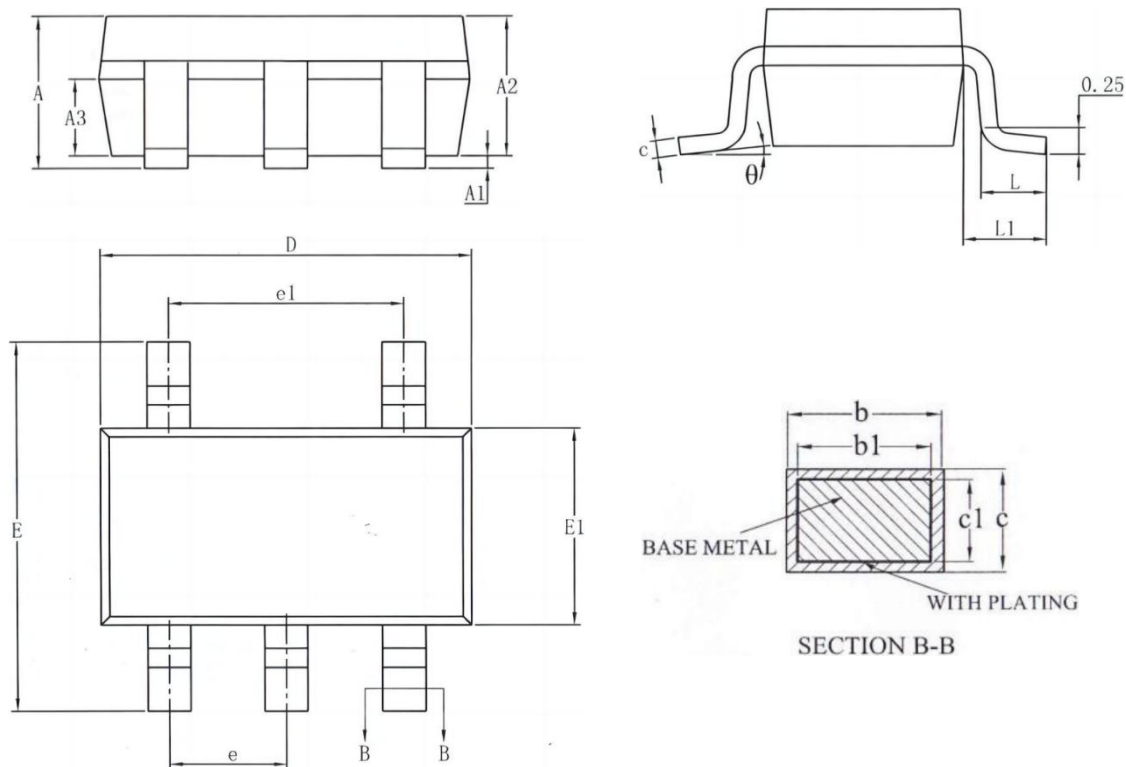

| Symbol | Dimensions In Millimeters |      |      | Symbol   | Dimensions In Millimeters |      |      |
|--------|---------------------------|------|------|----------|---------------------------|------|------|
|        | Min                       | Nom  | Max  |          | Min                       | Nom  | Max  |
| A      | -                         | -    | 1.25 | D        | 2.82                      | 2.92 | 3.02 |
| A1     | 0.04                      | -    | 0.10 | E        | 2.60                      | 2.80 | 3.00 |
| A2     | 1.00                      | 1.10 | 1.20 | E1       | 1.50                      | 1.60 | 1.70 |
| A3     | 0.60                      | 0.65 | 0.70 | e        | 0.95 BSC                  |      |      |
| b      | 0.33                      | -    | 0.41 | e1       | 1.90 BSC                  |      |      |
| b1     | 0.32                      | 0.35 | 0.38 | L        | 0.30                      | -    | 0.60 |
| c      | 0.15                      | -    | 0.19 | L1       | 0.60 REF                  |      |      |
| c1     | 0.14                      | 0.15 | 0.16 | $\theta$ | 0°                        | -    | 8°   |




# LMV721/LMV722/LMV724

## Package Information

### SOP-8

### Dimensions in mm

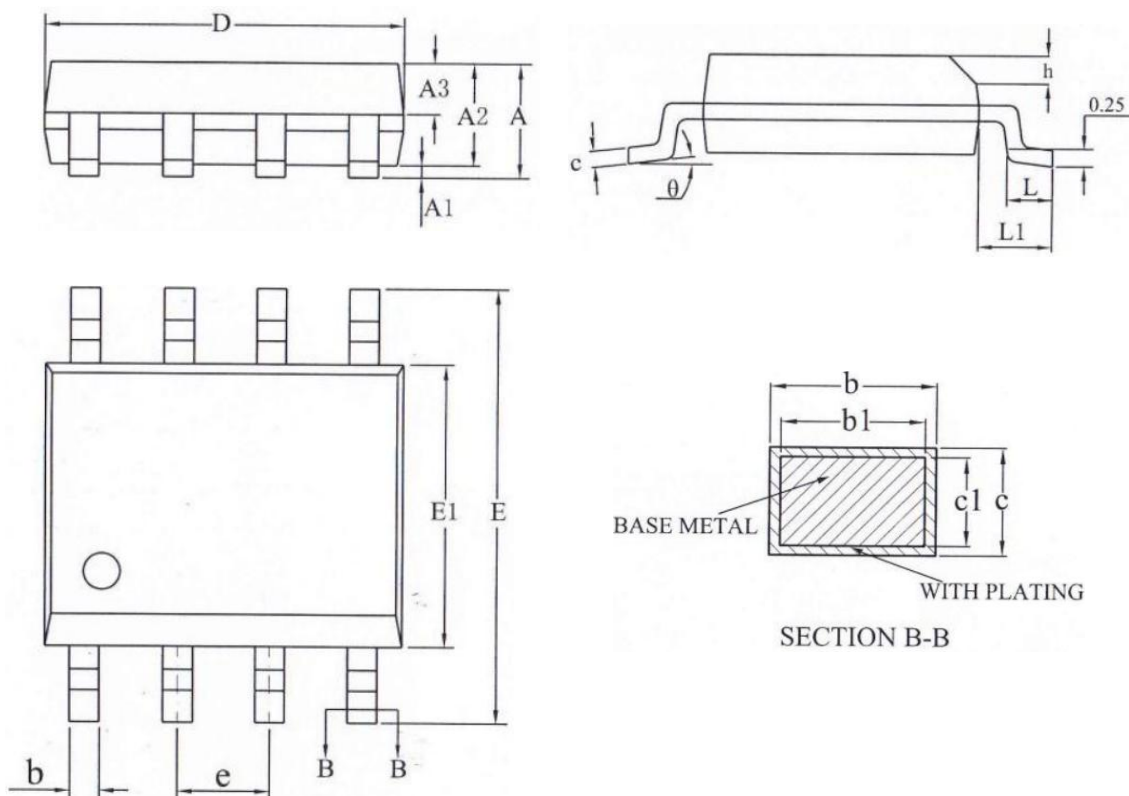

| Symbol | Dimensions In Millimeters |      |       | Symbol | Dimensions In Millimeters |      |      |
|--------|---------------------------|------|-------|--------|---------------------------|------|------|
|        | Min                       | Nom  | Max   |        | Min                       | Nom  | Max  |
| A      | -                         | -    | 1.75  | D      | 4.80                      | 4.90 | 5.00 |
| A1     | 0.10                      | -    | 0.225 | E      | 5.80                      | 6.00 | 6.20 |
| A2     | 1.30                      | 1.40 | 1.50  | E1     | 3.80                      | 3.90 | 4.00 |
| A3     | 0.60                      | 0.65 | 0.70  | e      | 1.27 BSC                  |      |      |
| b      | 0.39                      | -    | 0.47  | h      | 0.25                      | -    | 0.50 |
| b1     | 0.38                      | 0.41 | 0.44  | L      | 0.50                      | -    | 0.80 |
| c      | 0.20                      | -    | 0.24  | L1     | 1.05 REF                  |      |      |
| c1     | 0.19                      | 0.20 | 0.21  | θ      | 0°                        | -    | 8°   |







# LMV721/LMV722/LMV724


## Package Information

### SOP-14

### Dimensions in mm

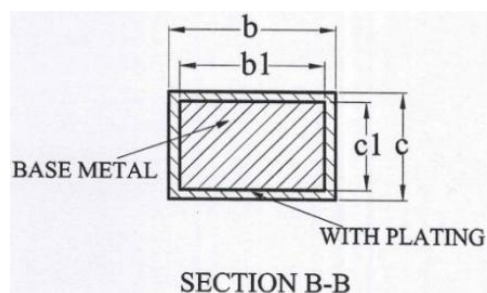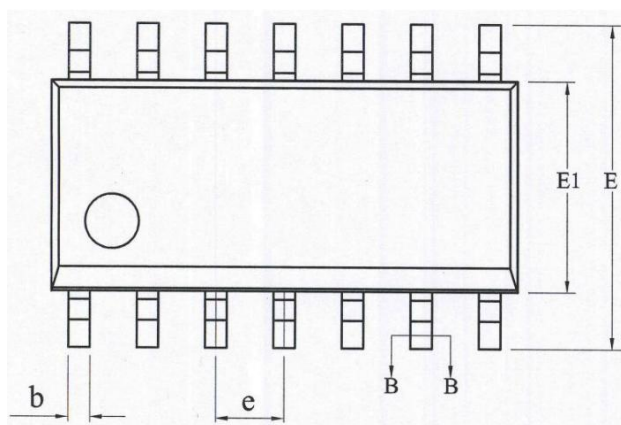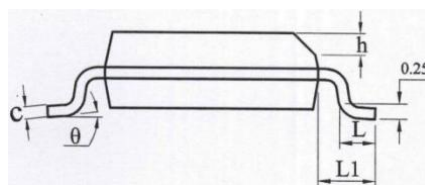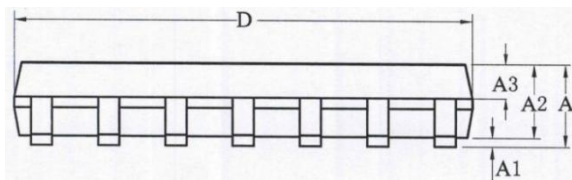

| Symbol | Dimensions In Millimeters |      |       | Symbol | Dimensions In Millimeters |      |      |
|--------|---------------------------|------|-------|--------|---------------------------|------|------|
|        | Min                       | Nom  | Max   |        | Min                       | Nom  | Max  |
| A      | -                         | -    | 1.75  | D      | 8.55                      | 8.65 | 8.75 |
| A1     | 0.10                      | -    | 0.225 | E      | 5.80                      | 6.00 | 6.20 |
| A2     | 1.30                      | 1.40 | 1.50  | E1     | 3.80                      | 3.90 | 4.00 |
| A3     | 0.60                      | 0.65 | 0.70  | e      | 1.27 (BSC)                |      |      |
| b      | 0.39                      | -    | 0.47  | h      | 0.25                      | -    | 0.50 |
| b1     | 0.38                      | 0.41 | 0.44  | L      | 0.50                      | -    | 0.80 |
| c      | 0.20                      | -    | 0.24  | L1     | 1.05 (REF)                |      |      |
| c1     | 0.19                      | 0.20 | 0.21  | θ      | 0°                        | -    | 8°   |



# LMV721/LMV722/LMV724

---

## Shikues Disclaimer

### 1.Accuracy of Information and Right to Modify

The information provided in this document is for reference only. Shikues reserves the right to make changes to this document and to the specifications of the products described herein at any time, without prior notice, for the purpose of improving reliability, function, design, or for any other reason. It is the customer's responsibility to obtain and verify the latest product information and specifications before making any final design, procurement, or usage decisions.

### 2.No Warranty

Shikues makes no express or implied warranties, representations, or guarantees regarding the suitability of its products for any particular purpose.

Shikues assumes no liability for any assistance provided or for the design of customer products. All products are supplied "as is."

### 3.Intended Use and Limitation of Liability

The products described in this document are intended for use in general-purpose electronic devices. They are neither designed nor tested nor authorized for use in transportation equipment or applications requiring high reliability. Unless expressly authorized in writing by Shikues, these products must not be used as critical components in life-support systems or any applications where failure could directly pose a risk to human life (including, but not limited to, medical devices, transportation systems, aerospace equipment, nuclear facilities, and safety-critical systems).

Shikues assumes no responsibility or liability for any consequences arising from the use of its products in unauthorized or unintended applications.

Neither Shikues nor its representatives shall be held liable for any resulting damages.

### 4.Intellectual Property

This document does not grant any express or implied license—whether by estoppel, implication, or otherwise—to use any intellectual property rights of Shikues.