




BARRIER RECTIFIERS

FEATURES

- Low forward voltage drop
- Low power loss, high efficiency
- High surge capability
- High current capability

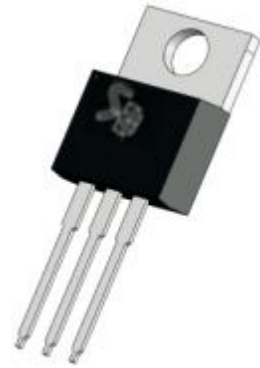

TO-220

Package No to Scale

Ordering Information

Part Number	Package
MBR1080L-T	TO-220

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified


Parameter	Symbol	Value	Unit
Max. Repetitive Peak Reverse Voltage @0.5mA	VRRM	80	V
Reverse Voltage	VR	80	V
Max. Average Forward Rectified Current	IF(AV)	10	A

Characteristics at Ta=25

Parameter	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage Drop @ IF=3A @ IF=10A	VF		0.46 0.61	0.51	V
Max. Reverse Current at VRRM @80V	IR		2	30	μA
Operating Temperature Range	TJ	-55		+150	
Storage Temperature Range	TSTG	-55		+150	



TO-220

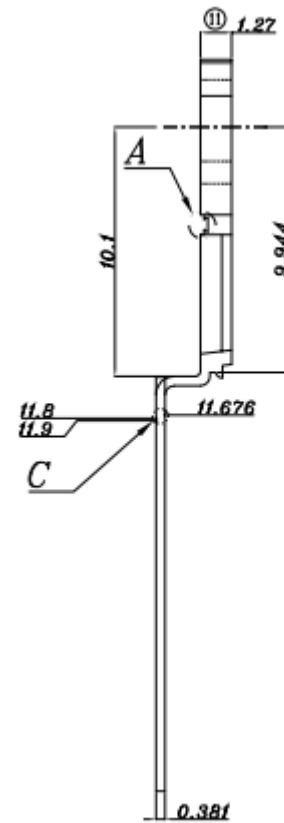

3:1