



MM1W3V3 THRU MM1W91


Silicon Planar Zener Diodes

Features

- Total power dissipation: Max. 1W
- Wide zener reverse voltage range 3.3V to 91V
- Small plastic package suitable for surface mounted design

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

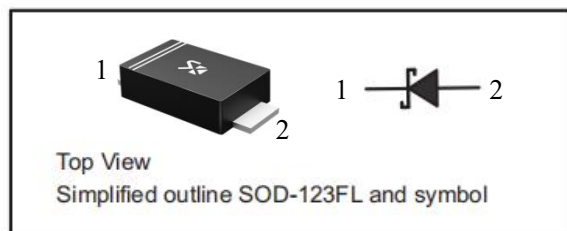


Absolute Maximum Ratings and Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	1	W
Forward Voltage at $I_F=200\text{mA}$	V_F	1.2	V
Junction Temperature Range	T_J	$-55\sim+150$	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	$-55\sim+150$	$^{\circ}\text{C}$
Typical Thermal Resistance ⁽¹⁾	$R_{\theta JA}$	105	$^{\circ}\text{C}/\text{W}$
	$R_{\theta JC}$	25	$^{\circ}\text{C}/\text{W}$
	$R_{\theta JL}$	32	$^{\circ}\text{C}/\text{W}$

Note:(1) P.C.B. mounted with 0.2" x 0.2" (5 x 5mm) copper pad areas

Typical Characteristics

Fig.1 Maximum Continuous Power Derating

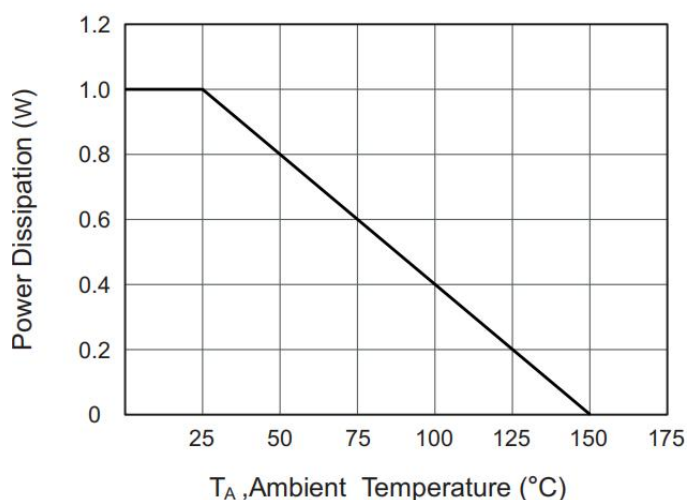



MM1W3V3 THRU MM1W91

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted, $V_F<0.9\text{V}@ I_F=10\text{mA}$)

Type	Marking	Zener Voltage Range ⁽¹⁾				Dynamic Impedance	Reverse Current		Admissible Zener Current
		V _{ZT} (at I _{ZT})			I _{ZT}	Z _{ZT} (at I _{ZT})	I _R	at V _R	
		Min(V)	Nom(V)	Max(V)	(mA)	Max(Ω)	Max(μA)	(V)	I _{ZM} (mA)
MM1W3V3	FHD	3.14	3.3	3.47	75	10	100	1	285
MM1W3V6	FHE	3.42	3.6	3.78	69	10	100	1	263
MM1W3V9	FHF	3.71	3.9	4.1	64	9.0	50	1	243
MM1W4V3	FHG	4.09	4.3	4.52	58	9.0	25	1	219
MM1W4V7	FHJ	4.47	4.7	4.94	53	8.0	10	1	203
MM1W5V1	FHK	4.85	5.1	5.36	49	7.0	10	1	186
MM1W5V6	FHL	5.32	5.6	5.88	45	5.0	10	2	170
MM1W6V2	FHN	5.89	6.2	6.51	41	2.0	10	3	154
MM1W6V8	FHO	6.46	6.8	7.14	37	3.5	10	4	140
MM1W7V5	FHQ	7.13	7.5	7.88	34	4.0	10	5	127
MM1W8V2	FHR	7.79	8.2	8.61	31	4.5	10	6	116
MM1W9V1	FHT	8.65	9.1	9.56	28	5.0	10	7	104
MM1W10	FHU	9.5	10	10.5	25	7.0	10	7	95
MM1W11	FHV	10.45	11	11.55	23	8.0	5	8	86
MM1W12	FHW	11.4	12	12.6	21	9.0	5	9	79
MM1W13	FHX	12.35	13	13.65	19	10	5	10	71
MM1W15	FHZ	14.25	15	15.75	17	14	5	11	63
MM1W16	FJA	15.2	16	16.8	16	16	5	12	58
MM1W18	FJF	17.1	18	18.9	14	20	5	13	52
MM1W19	FJD	18.05	19	19.95	13.5	21	5	14	48
MM1W20	FJG	19	20	21	13	22	5	15	47



MM1W3V3 THRU MM1W91

MM1W22	FJK	20.9	22	23.1	12	23	5	17	43
MM1W24	FJL	22.8	24	25.2	11	25	5	18	38
MM1W27	FJN	25.65	27	28.35	9.5	35	5	21	35
MM1W30	FJQ	28.5	30	31.5	8.5	40	5	23	31
MM1W33	FJR	31.35	33	34.65	7.5	45	5	25	28
MM1W36	FJS	34.2	36	37.8	7.0	50	5	27	26
MM1W39	FJT	37.05	39	40.95	6.5	60	5	30	24
MM1W43	FLG	40.85	43	45.15	6.0	70	1	32	22
MM1W47	FLJ	44.65	47	49.35	5.5	80	1	35	20
MM1W51	FLK	48.45	51	53.55	5.0	95	1	38	18
MM1W56	FLL	53.2	56	58.8	4.5	110	1	42	17
MM1W62	FLN	58.9	62	65.1	4.0	125	1	47	15
MM1W68	FLO	64.6	68	71.4	3.7	150	1	52	14
MM1W75	FLQ	71.25	75	78.75	3.3	175	1	56	12
MM1W82	FLR	77.9	82	86.1	3.0	200	1	62	11
MM1W91	FLT	86.45	91	95.55	2.8	250	1	69	10

Note:(1).V_{zT} is tested with pulses(20ms)




MM1W3V3 THRU MM1W91

Package Information


SOD-123FL

Dimensions in mm

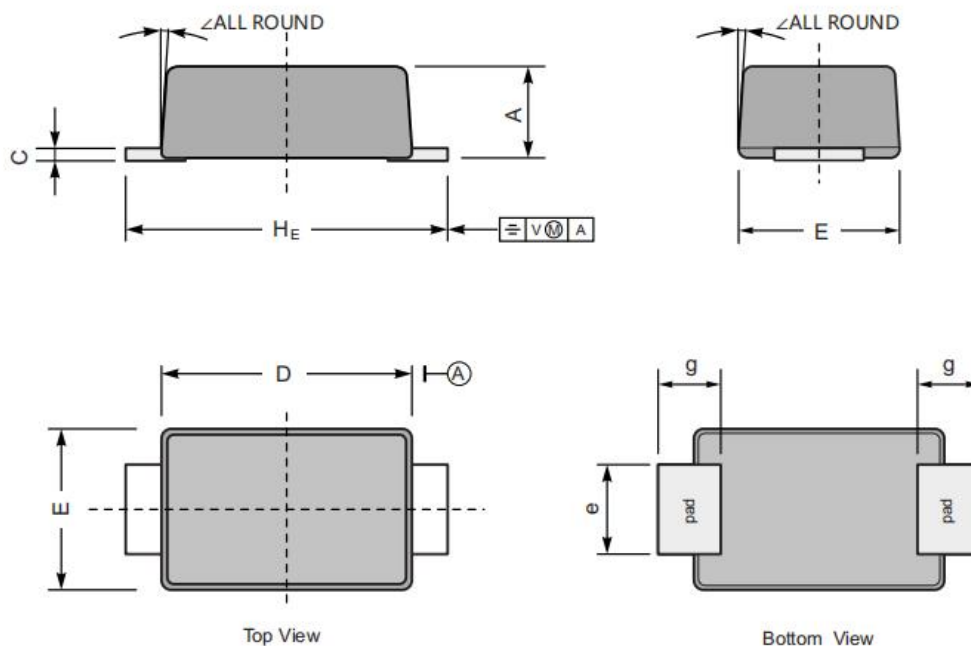

UNIT		A	C	D	E	e	g	H_E	$\angle$
mm	max	1.1	0.20	2.9	1.9	1.1	0.9	3.8	7°
	min	0.9	0.12	2.6	1.7	0.8	0.7	3.5	
mil	max	43	7.9	114	75	43	35	150	
	min	35	4.7	102	67	31	28	138	

The recommended mounting pad size

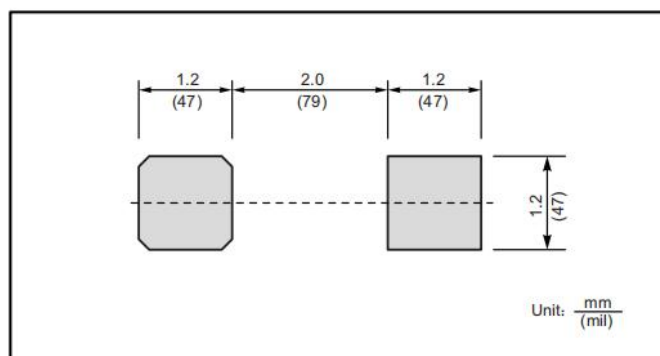



MM1W3V3 THRU MM1W91

Shikues Disclaimer

1.Accuracy of Information and Right to Modify

The information provided in this document is for reference only. Shikues reserves the right to make changes to this document and to the specifications of the products described herein at any time, without prior notice, for the purpose of improving reliability, function, design, or for any other reason. It is the customer's responsibility to obtain and verify the latest product information and specifications before making any final design, procurement, or usage decisions.

2.No Warranty

Shikues makes no express or implied warranties, representations, or guarantees regarding the suitability of its products for any particular purpose.

Shikues assumes no liability for any assistance provided or for the design of customer products. All products are supplied "as is."

3.Intended Use and Limitation of Liability

The products described in this document are intended for use in general-purpose electronic devices. They are neither designed nor tested nor authorized for use in transportation equipment or applications requiring high reliability. Unless expressly authorized in writing by Shikues, these products must not be used as critical components in life-support systems or any applications where failure could directly pose a risk to human life (including, but not limited to, medical devices, transportation systems, aerospace equipment, nuclear facilities, and safety-critical systems).

Shikues assumes no responsibility or liability for any consequences arising from the use of its products in unauthorized or unintended applications.

Neither Shikues nor its representatives shall be held liable for any resulting damages.

4.Intellectual Property

This document does not grant any express or implied license—whether by estoppel, implication, or otherwise—to use any intellectual property rights of Shikues.