


MUR1620CAT


Fast Recovery Epi Diodes Reverse Voltage – 200 Volts Forward Current – 16 Amperes

Features

- High frequency operation
- High surge forward current capability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7s, per JESD 22-B106



RoHS
COMPLIANT



TO-220

Mechanical data

- Case: TO-220
- Approx. Weight: 1.9g (0.067oz)
- Lead free finish, RoHS complian
- Case Material: “Green” molding compound, U flammability classification 94V-0, “Halogen-free”.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

PARAMETER	Symbols	MUR1620CAT	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	V
Maximum RMS voltage	V_{RMS}	140	V
Maximum DC blocking Voltage	V_{DC}	200	V
Maximum Average Forward Rectified Current @Tc=100°C per leg per device	$I_{F(AV)}$	8 16	A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	100	A
Instantaneous forward voltage at 8A per leg	V_F	1.0	V
Maximum instantaneous reverse current at rated DC blocking voltage Ta=25°C Ta=125°C	I_R	10 100	uA
Maximum Reverse Recovery Time NOTE 1	t_{rr}	35	ns
Maximum Thermal Resistance Junction To Case	$R_{\theta JC}$	4	°C/W
Operation Junction Temperature and Storage Temperature	T_j, T_{stg}	-55 ~ +150	°C

NOTE 1: Reverse recovery test conditions $I_F=0.5A$, $I_R=1.0A$, $I_{rr}=0.25A$



Fig.1 TYPICAL FORWARD CURRENT DERATING CURVE

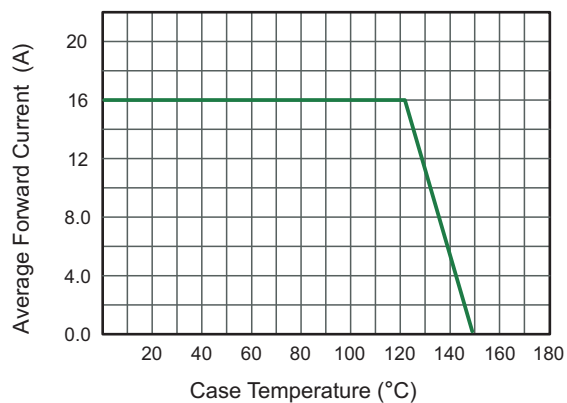


Fig.2 Typical Reverse Characteristics

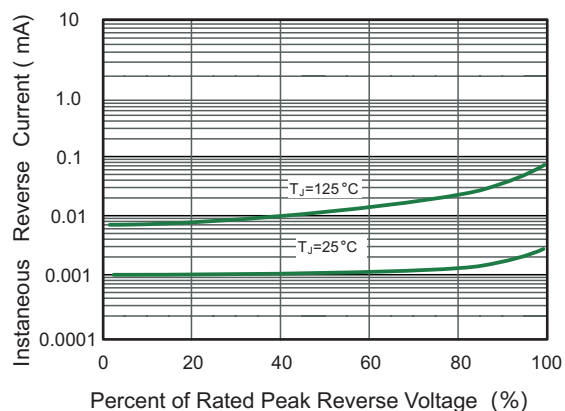


Fig.3 Typical Forward Characteristics


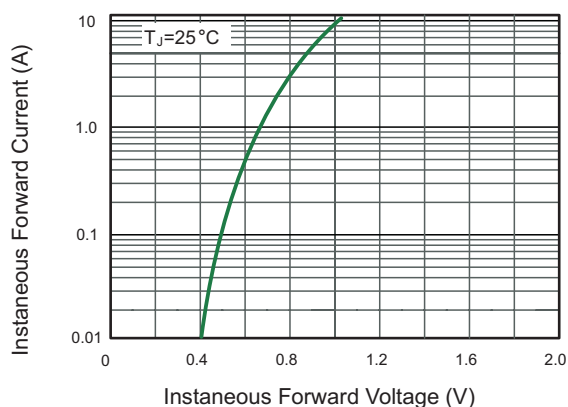


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current






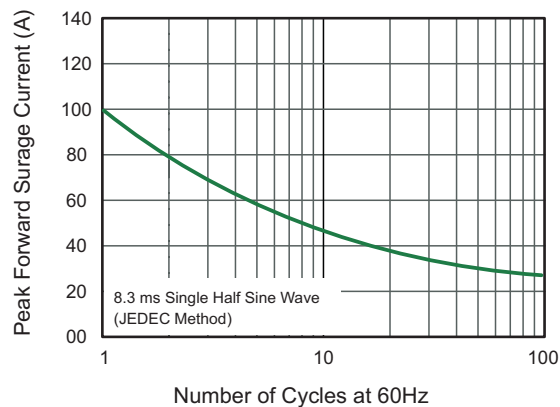

MUR1620CAT

PACKAGE OUTLINE
Plastic surface mounted package; 3 leads

TO-220

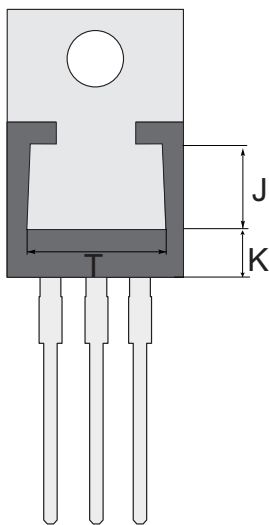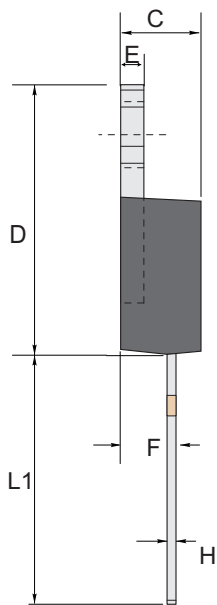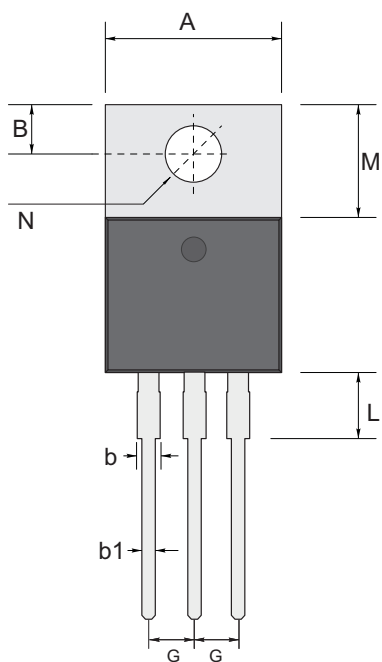

TO-220 mechanical data

UNIT		A	B	b	b1	C	D	E	F	G	H	L	L1	M	N	J	T	K
mm	max	10.45	2.94	1.77	0.94	4.76	16.0	1.40	2.80	2.54 TYPICAL	0.64	4.2	14.79	6.6 TYPICAL	3.8 TYPICAL	4.65 ref.	7.70 ref.	3.22 ref.
	typ	9.94	2.74	1.27	0.81	4.53	15.09	1.27	2.69		0.38	3.89	13.18					
	min	9.85	2.54	1.14	0.62	4.42	14.6	1.14	2.20		0.35	2.8	13.08					
mil	max	411	116	70	40	187	630	55	110	100 TYPICAL	25	165	582	259 TYPICAL	150 TYPICAL	1.83 ref.	303 ref.	126 ref.
	typ	391	107	50	31	178	594	50	105		15	153	519					
	min	388	100	45	24	174	575	45	87		14	110	515					