


# S3ABG THRU S3MBG

## Surface Mount General Purpose Silicon Rectifiers

Reverse Voltage - 50 to 1000 V Forward Current - 3 A

### PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | Cathode     |
| 2   | Anode       |

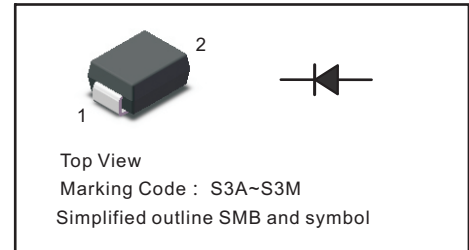

### FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Lead free in comply with EU RoHS 2011/65/EU directives

### MECHANICAL DATA

- Case: SMB
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.055g / 0.002oz

### Maximum Ratings and Electrical characteristics


Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

| Parameter                                                                                                                               | Symbols                            | S3AB<br>G  | S3BB<br>G | S3DB<br>G | S3GB<br>G | S3JB<br>G | S3KB<br>G | S3MB<br>G | Units                |
|-----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|----------------------|
| Maximum Repetitive Peak Reverse Voltage                                                                                                 | $V_{RRM}$                          | 50         | 100       | 200       | 400       | 600       | 800       | 1000      | V                    |
| Maximum RMS voltage                                                                                                                     | $V_{RMS}$                          | 35         | 70        | 140       | 280       | 420       | 560       | 700       | V                    |
| Maximum DC Blocking Voltage                                                                                                             | $V_{DC}$                           | 50         | 100       | 200       | 400       | 600       | 800       | 1000      | V                    |
| Maximum Average Forward Rectified Current                                                                                               | $I_{F(AV)}$                        | 3          |           |           |           |           |           |           | A                    |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load                                                      | $I_{FSM}$                          | 90         |           |           |           |           |           |           | A                    |
| Maximum Instantaneous Forward Voltage at 3 A                                                                                            | $V_F$                              | 1.1        |           |           |           |           |           |           | V                    |
| Maximum DC Reverse Current<br>$T_a = 25\text{ }^{\circ}\text{C}$<br>at Rated DC Blocking Voltage<br>$T_a = 125\text{ }^{\circ}\text{C}$ | $I_R$                              | 5<br>100   |           |           |           |           |           |           | $\mu\text{A}$        |
| Typical Junction Capacitance <sup>(1)</sup>                                                                                             | $C_j$                              | 35         |           |           |           |           |           |           | pF                   |
| Typical Thermal Resistance <sup>(2)</sup>                                                                                               | $R_{\theta JA}$<br>$R_{\theta JC}$ | 48<br>16   |           |           |           |           |           |           | $^{\circ}\text{C/W}$ |
| Operating and Storage Temperature Range                                                                                                 | $T_j, T_{stg}$                     | -55 ~ +150 |           |           |           |           |           |           | $^{\circ}\text{C}$   |

( 1 ) Measured at 1 MHz and applied reverse voltage of 4 V D.C

( 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



# S3ABG THRU S3MBG

Fig.1 Forward Current Derating Curve

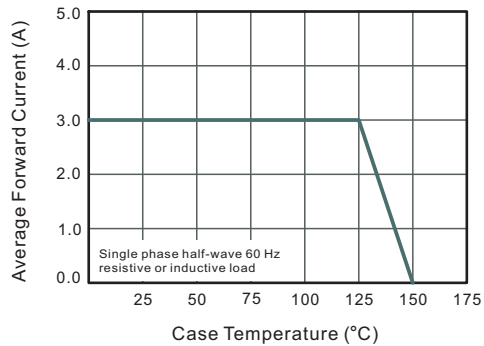


Fig.2 Typical Instantaneous Reverse Characteristics

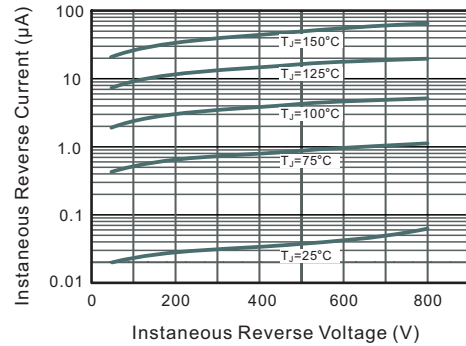


Fig.3 Typical Forward Characteristic

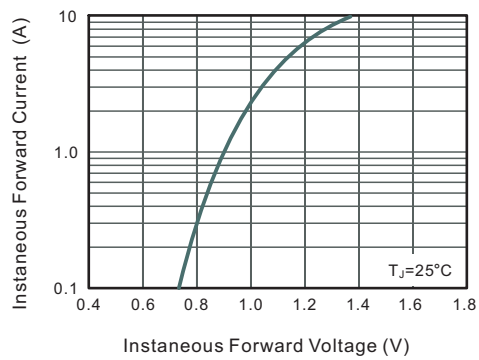


Fig.4 Typical Junction Capacitance



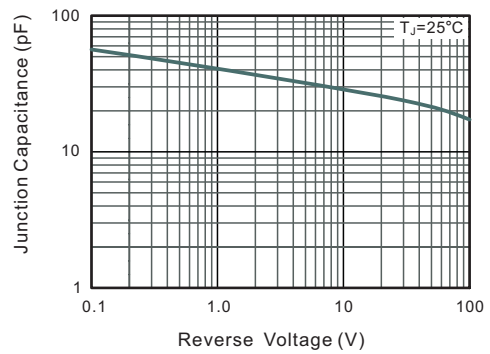


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

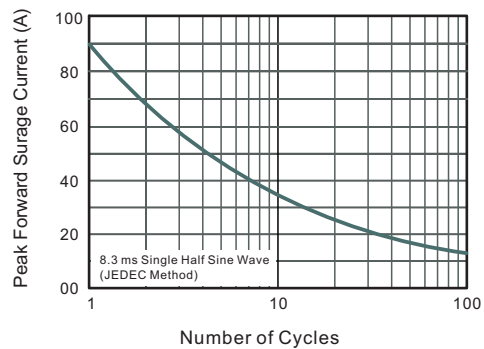




# S3ABG THRU S3MBG

## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SMB

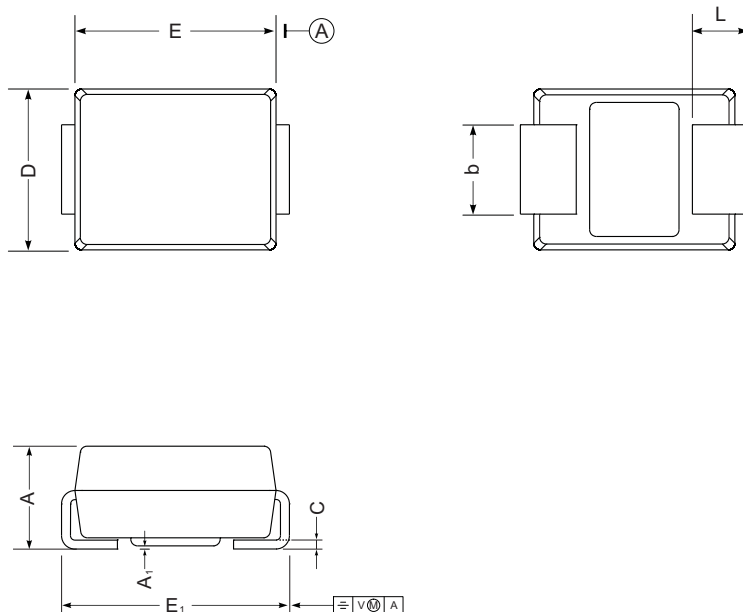

SMB mechanical data

| UNIT |     | A    | E    | D    | E <sub>1</sub> | A <sub>1</sub> | L   | C     | b   |
|------|-----|------|------|------|----------------|----------------|-----|-------|-----|
| mm   | max | 2.44 | 4.70 | 3.94 | 5.59           | 0.20           | 1.5 | 0.305 | 2.2 |
|      | min | 2.13 | 4.06 | 3.3  | 5.08           | 0.05           | 0.8 | 0.152 | 1.9 |
| mil  | max | 96   | 185  | 155  | 220            | 7.9            | 59  | 12    | 87  |
|      | min | 84   | 160  | 130  | 200            | 2.0            | 32  | 6     | 75  |

## The recommended mounting pad size

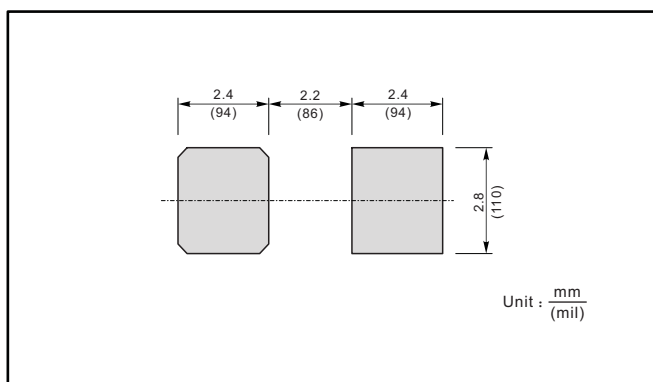

## Marking

| Type number | Marking code |
|-------------|--------------|
| S3ABG       | S3A          |
| S3BBG       | S3B          |
| S3DBG       | S3D          |
| S3GBG       | S3G          |
| S3JBG       | S3J          |
| S3KBG       | S3K          |
| S3MBG       | S3M          |