



SK07N80B-TF

800V N-Channel MOSFET

General Features

- Proprietary New Planar Technology
- $R_{DS(ON),typ.} = 1.5 \Omega @ V_{GS}=10V$
- Low Gate Charge Minimize Switching Loss
- Fast Recovery Body Diode


Applications

- Adaptor
- LCD Panel Power
- Other Applications

Ordering Information

Part Number	Package
	TO-220F

BV_{DSS}	$R_{DS(ON),typ.}$	I_D
800V	1.5Ω	7.0A

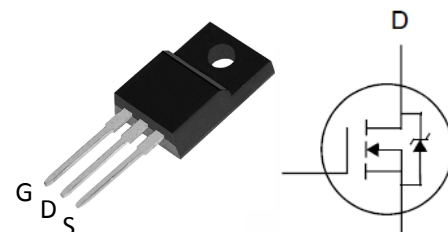

TO-220F

Package Not to Scale

Absolute Maximum Ratings

$T_C=25$ unless otherwise specified

Symbol	Parameter	TO-220F	Unit
V_{DSS}	Drain-to-Source Voltage ^[1]	800	V
V_{GSS}	Gate-to-Source Voltage	±30	
I_D	Continuous Drain Current	7.0	A
$I_D @ T_C = 100^\circ C$	Continuous Drain Current @ $T_C=100^\circ C$	Figure 3	
I_{DM}	Pulsed Drain Current at $V_{GS}=10V^{[2]}$	Figure 6	
E_{AS}	Single Pulse Avalanche Energy	580	mJ
dv/dt	Peak Diode Recovery $dv/dt^{[3]}$	5.0	V/ns
P_D	Power Dissipation	40	W
	Derating Factor above $25^\circ C$	0.32	W/°C
T_L T_{PAK}	Maximum Temperature for Soldering Leads at 0.063in (1.6mm) from Case for 10 seconds, Package Body for 10 seconds	300 260	°C
$T_J \& T_{STG}$	Operating and Storage Temperature Range	-55 to 150	

Caution: Stresses greater than those listed in the "Absolute Maximum Ratings" may cause permanent damage to the device.

Thermal Characteristics

Symbol	Parameter	TO-220F	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	3.125	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	100	



Electrical Characteristics

OFF Characteristics $T_J = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	800	--	--	V	$V_{GS}=0V, I_D=250\mu A$
I_{DSS}	Drain-to-Source Leakage Current	--	--	1	μA	$V_{DS}=800V, V_{GS}=0V$
		--	--	100		$V_{DS}=640V, V_{GS}=0V, T_J=125^\circ\text{C}$
I_{GSS}	Gate-to-Source Leakage Current	1 of 8	--	+100	nA	$V_{GS}=+30V, V_{DS}=0V$
		--	--	-100		$V_{GS}=-30V, V_{DS}=0V$

ON Characteristics

$T_J = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$R_{DS(ON)}$	Static Drain-to-Source On-Resistance ^[4]	--	1.5	1.8	Ω	$V_{GS}=10V, I_D=3.5A$
$V_{GS(TH)}$	Gate Threshold Voltage	2.0	--	4.0	V	$V_{DS}=V_{GS}, I_D=250\mu A$
gfs	Forward Transconductance ^[4]	--	5.5	--	S	$V_{DS}=30V, I_D=7.0A$

Dynamic Characteristics


Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
C_{iss}	Input Capacitance	--	1350	--	pF	$V_{GS}=0V, V_{DS}=25V, f=1.0MHz$
C_{rss}	Reverse Transfer Capacitance	--	12	--		
C_{oss}	Output Capacitance	--	120	--		
Q_g	Total Gate Charge	--	34	--	nC	$V_{DD}=400V, I_D=7.0A, V_{GS}=0 \text{ to } 10V$
Q_{gs}	Gate-to-Source Charge	--	6.0	--		
Q_{gd}	Gate-to-Drain (Miller) Charge	--	14	--		

Resistive Switching Characteristics

Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$t_{d(ON)}$	Turn-on Delay Time	--	15	--	nS	$V_{DD}=400V, I_D=7.0A, V_{GS}=10V, R_G=12\Omega$
t_{rise}	Rise Time	--	25	--		
$t_{d(OFF)}$	Turn-Off Delay Time	--	50	--		
t_{fall}	Fall Time	--	30	--		



SK07N80B-TF

Source-Drain Body Diode Characteristics

$T_J=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Min	Typ.	Max.	Unit	Test Conditions
I_{SD}	Continuous Source Current ^[4]	--	--	7.0	A	Integral PN-diode in MOSFET
I_{SM}	Pulsed Source Current ^[4]	--	--	28		
V_{SD}	Diode Forward Voltage	--	--	1.5	V	$I_S=7.0\text{A}$, $V_{GS}=0\text{V}$
t_{rr}	Reverse recovery time	--	185	--	ns	$V_{GS}=0\text{V}$, $I_F=7.0\text{A}$, $di_F/dt=100\text{A}/\mu\text{s}$
Q_{rr}	Reverse recovery charge	--	0.85	--	uC	

Typical Characteristics

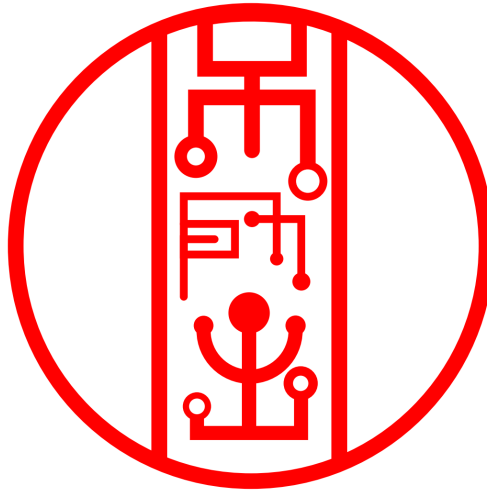


Figure 2. Maximum Power Dissipation vs Case Temperature

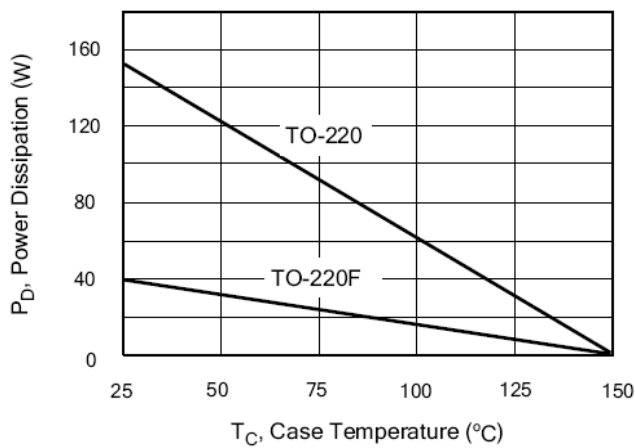


Figure3. Maximum Continuous Drain Current vs Case Temperature

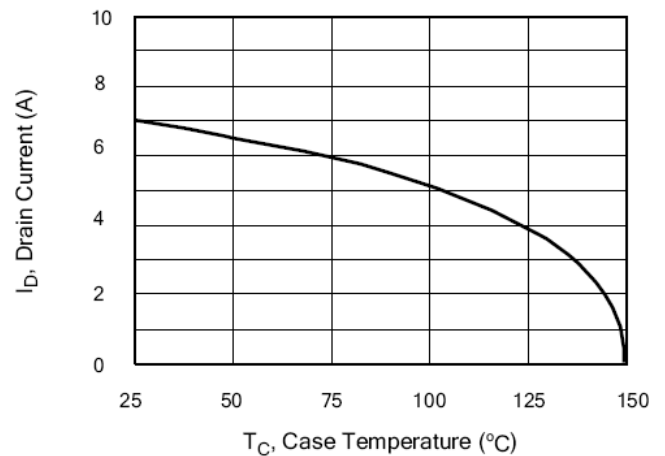


Figure 4. Typical Output Characteristics


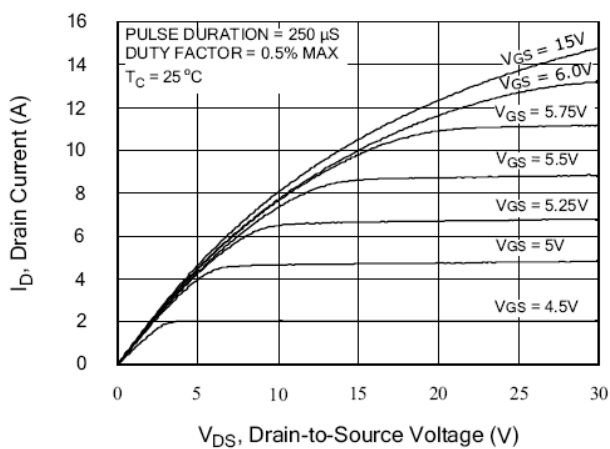


Figure5. Typical Drain-to-Source ON Resistance vs Gate Voltage and Drain Current

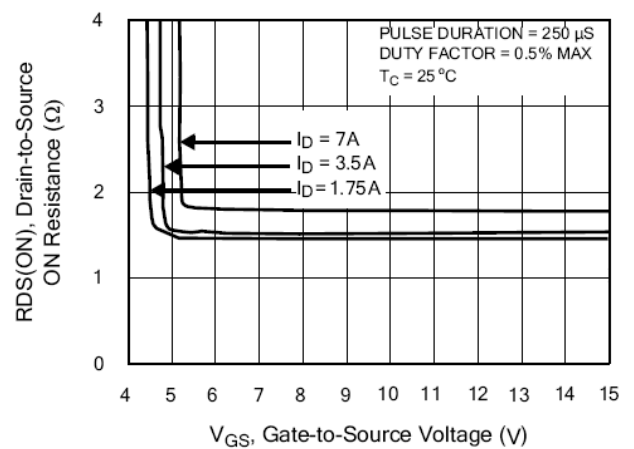

Typical Characteristics(Cont.)

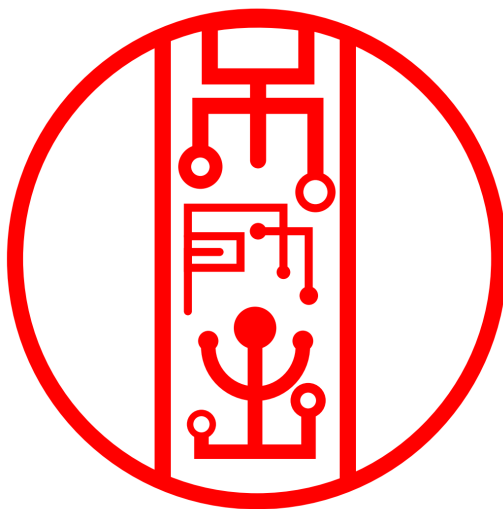


Figure 7. Typical Transfer Characteristics

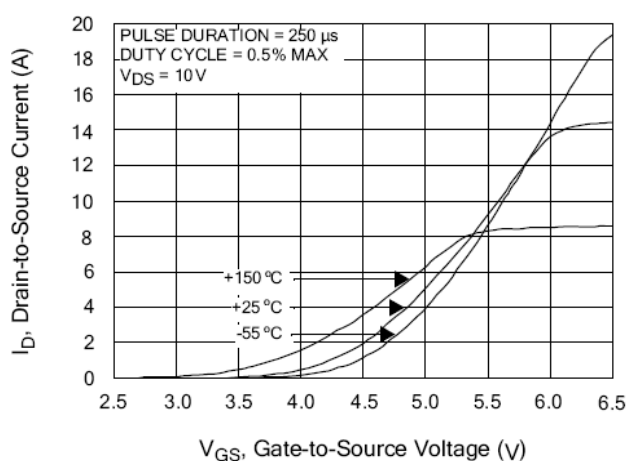


Figure 9. Typical Drain-to-Source ON Resistance vs Drain Current

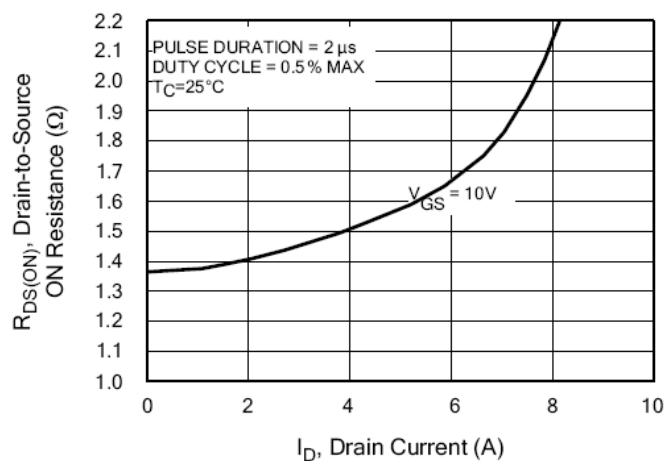


Figure 8. Unclamped Inductive Switching Capability


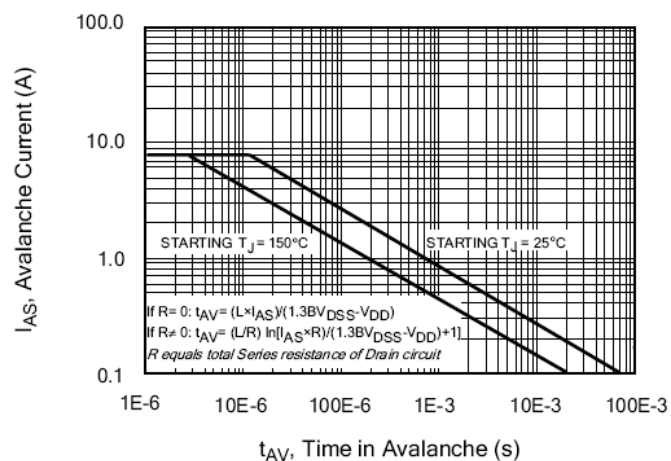


Figure 10. Typical Drain-to-Source ON Resistance vs Junction Temperature

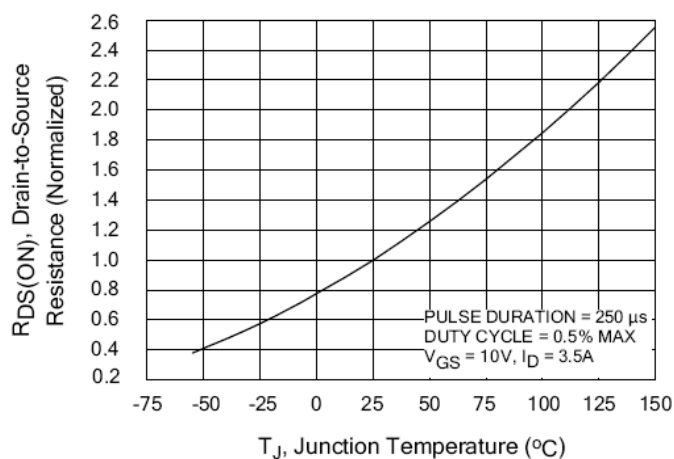

Typical Characteristics(Cont.)

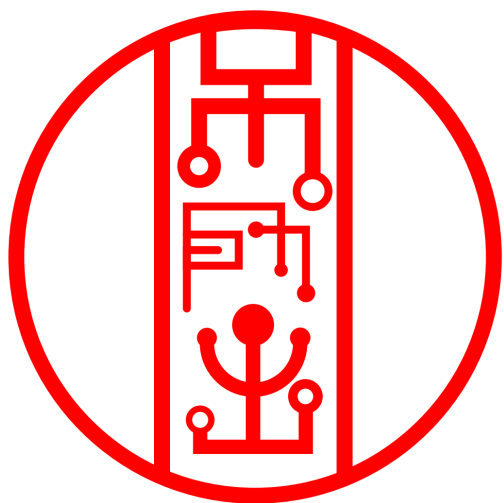


Figure 13. Maximum Forward Bias Safe Operating Area

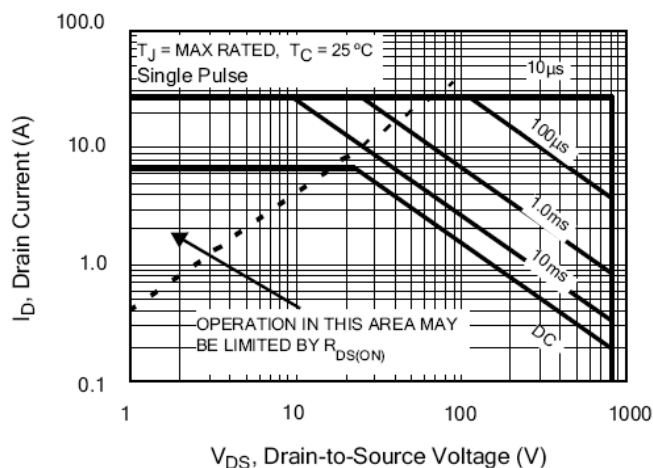


Figure 12. Typical Threshold Voltage vs Junction Temperature


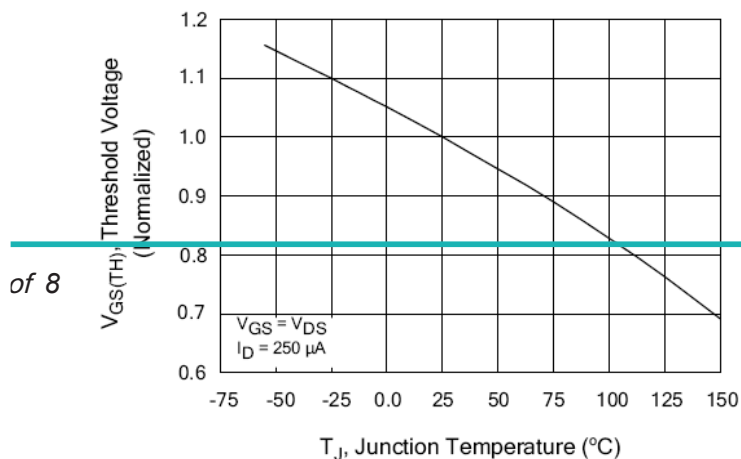


Figure 16. Typical Body Diode Transfer Characteristics

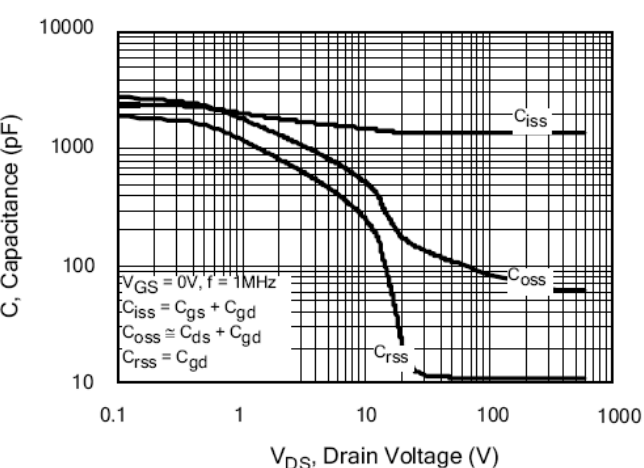

Test Circuits and Waveforms

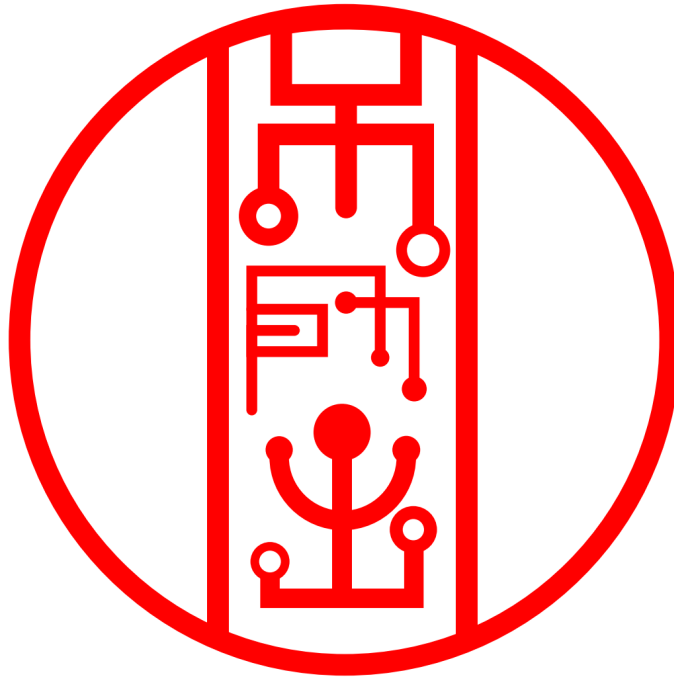


Fig. 1.1 Peak Diode Recovery dv/dt Test Circuit

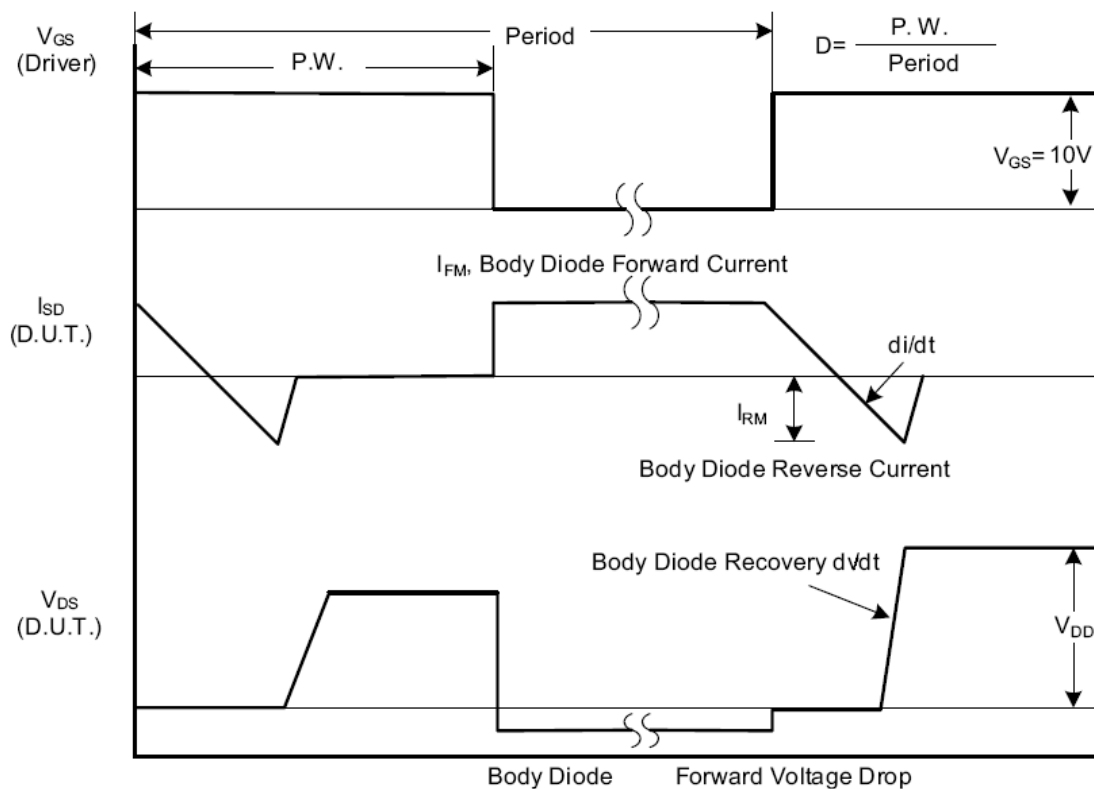


Fig. 1.2 Peak Diode Recovery dv/dt Waveforms

Test Circuits and Waveforms (Cont.)

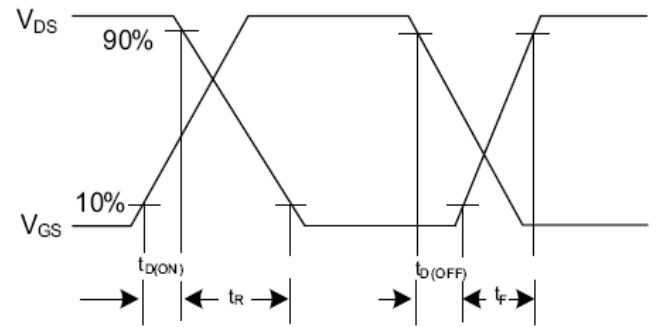
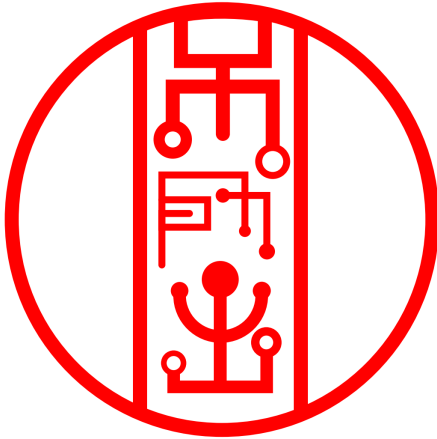


Fig. 2.2 Switching Waveforms

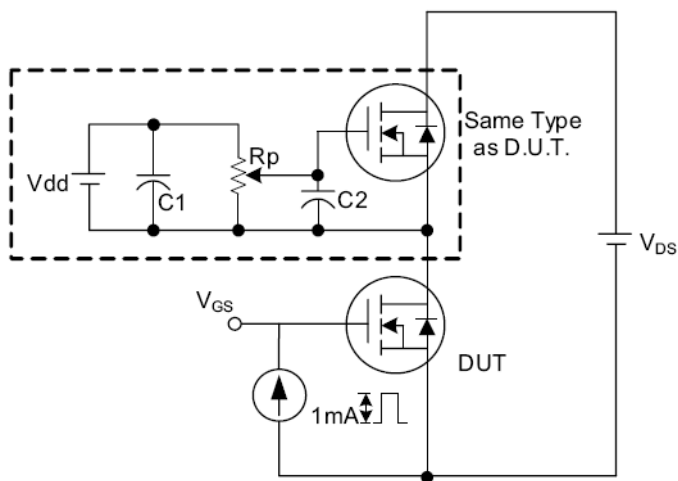


Fig. 3.1 Gate Charge Test Circuit

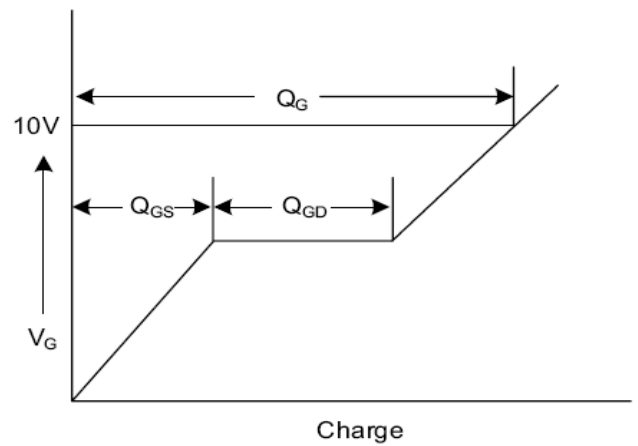


Fig. 3.2 Gate Charge Waveform

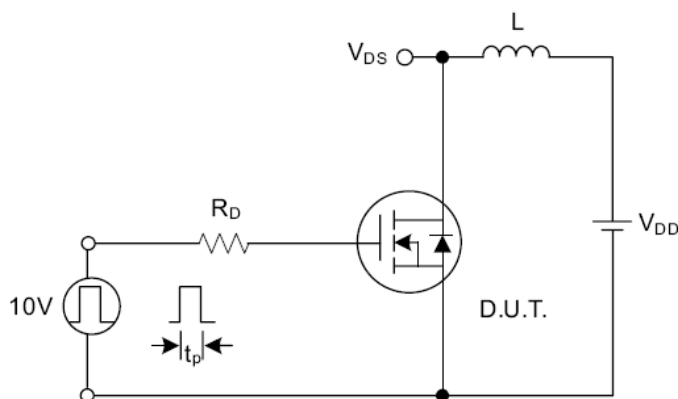


Fig. 4.1 Unclamped Inductive Switching Test Circuit

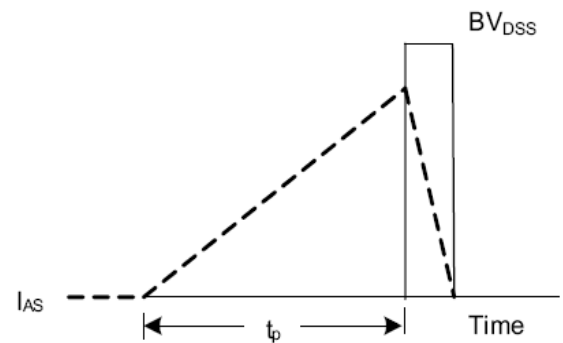


Fig. 4.2 Unclamped Inductive Switching Waveforms