

SK12N80B-T-TF

800V N-Channel MOSFET

General Features

- Proprietary New Planar Technology
- $R_{DS(ON),typ.}=0.80\ \Omega @ V_{GS}=10V$
- Low Gate Charge Minimize Switching Loss
- Fast Recovery Body Diode


BV_{DSS}	$R_{DS(ON),typ.}$	I_D
800V	0.80 Ω	12A

Applications

- ATX Power
- LCD Panel Power

Ordering Information

Part Number	Package
SK12N80B-T	TO-220
SK12N80B-TF	TO-220F

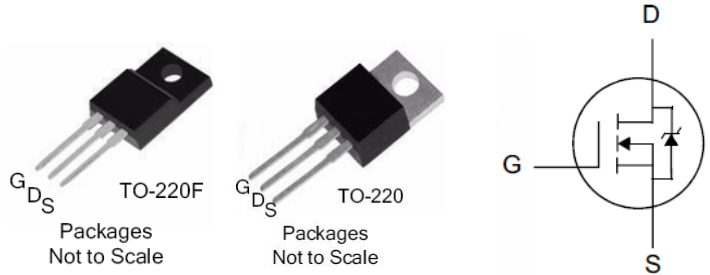

Absolute Maximum Ratings


$T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	TO-220	TO-220F	Unit
V _{DSS}	Drain-to-Source Voltage ^[1]	800		V
V _{GSS}	Gate-to-Source Voltage	±30		
I _D	Continuous Drain Current	12		A
I _D @ T _C =100°C	Continuous Drain Current @ T _C =100°C	Figure 3		
I _{DM}	Pulsed Drain Current at V _{GS} =10V ^[2]	Figure 6		
E _{AS}	Single Pulse Avalanche Energy	1200		mJ
dv/dt	Peak Diode Recovery dv/dt ^[3]	5.0		V/ns
P _D	Power Dissipation	160	55	W
	Derating Factor above 25°C	1.28	0.44	W/°C
T _L T _{PAK}	Maximum Temperature for Soldering Leads at 0.063in (1.6mm) from Case for 10 seconds, Package Body for 10 seconds	300 260		°C
T _J & T _{STG}	Operating and Storage Temperature Range	-55 to 150		

Caution: Stresses greater than those listed in the "Absolute Maximum Ratings" may cause permanent damage to the device.

Thermal Characteristics

Symbol	Parameter	TO-220	TO-220F	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	0.78	2.27	$^{\circ}\text{C}/\text{W}$
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	62	100	



SK12N80B-T-TF

Electrical Characteristics

OFF Characteristics $T_J = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	800	--	--	V	$V_{GS}=0V, I_D=250\mu A$
I_{DSS}	Drain-to-Source Leakage Current	--	--	1	μA	$V_{DS}=800V, V_{GS}=0V$
		--	--	100		$V_{DS}=640V, V_{GS}=0V, T_J=125^\circ\text{C}$
I_{GSS}	Gate-to-Source Leakage Current	--	--	+100	nA	$V_{GS}=+30V, V_{DS}=0V$
		--	--	-100		$V_{GS}=-30V, V_{DS}=0V$

ON Characteristics

$T_J = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$R_{DS(ON)}$	Static Drain-to-Source On-Resistance ^[4]	--	0.80	1.10	Ω	$V_{GS}=10V, I_D=6.0A$
$V_{GS(TH)}$	Gate Threshold Voltage	2.0	--	4.0	V	$V_{DS}=V_{GS}, I_D=250\mu A$
gfs	Forward Transconductance ^[4]	--	20	--	S	$V_{DS}=20V, I_D=10A$

Dynamic Characteristics


Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
C_{iss}	Input Capacitance	--	1950	--	pF	$V_{GS}=0V, V_{DS}=25V, f=1.0MHz$
C_{rss}	Reverse Transfer Capacitance	--	60	--		
C_{oss}	Output Capacitance	--	208	--		
Q_g	Total Gate Charge	--	70	--	nC	$V_{DD}=640V, I_D=12A, V_{GS}=0 \text{ to } 10V$
Q_{gs}	Gate-to-Source Charge	--	11	--		
Q_{gd}	Gate-to-Drain (Miller) Charge	--	33	--		

Resistive Switching Characteristics

Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$t_{d(ON)}$	Turn-on Delay Time	--	20	--	nS	$V_{DD}=400V, I_D=12A, V_{GS}=10V, R_G=4.7\Omega$
t_{rise}	Rise Time	--	12	--		
$t_{d(OFF)}$	Turn-Off Delay Time	--	70	--		
t_{fall}	Fall Time	--	25	--		



SK12N80B-T-TF

Source-Drain Body Diode Characteristics

$T_J=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Min	Typ.	Max.	Unit	Test Conditions
I_{SD}	Continuous Source Current ^[4]	--	--	12	A	Integral PN-diode in MOSFET
I_{SM}	Pulsed Source Current ^[4]	--	--	48		
V_{SD}	Diode Forward Voltage	--	--	1.5	V	$I_S=12\text{A}$, $V_{GS}=0\text{V}$
t_{rr}	Reverse recovery time	--	600	--	ns	$V_{GS}=0\text{V}$, $I_F=12\text{A}$, $di_F/dt=100\text{A}/\mu\text{s}$
Q_{rr}	Reverse recovery charge	--	3.4	--	uC	


Note:

[1] $T_J=+25^{\circ}\text{C}$ to $+150^{\circ}\text{C}$

[2] Repetitive rating; pulse width limited by maximum junction temperature.






[3] $I_{SD}=12\text{A}$ $di/dt < 100\text{ A}/\mu\text{s}$, $V_{DD} < BV_{DSS}$, $T_J=+150^{\circ}\text{C}$.

[4] Pulse width $\leq 380\mu\text{s}$; duty cycle $\leq 2\%$.



SK12N80B-T-TF

Typical Characteristics

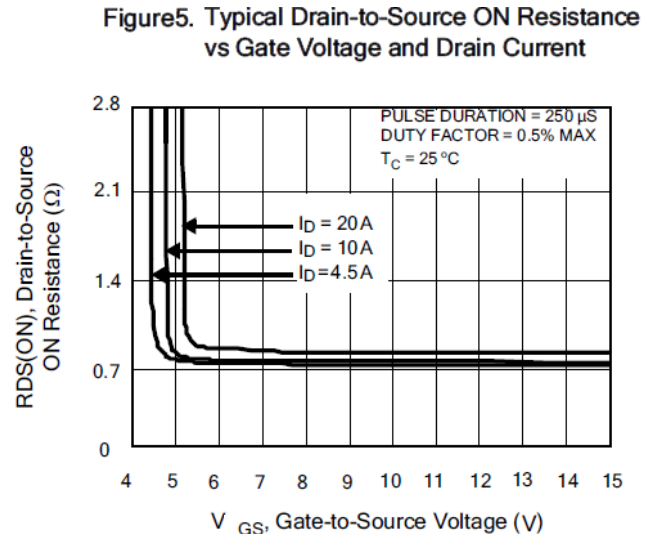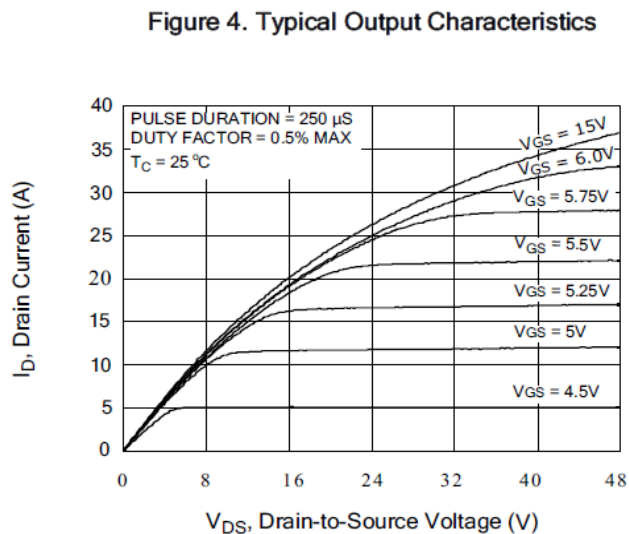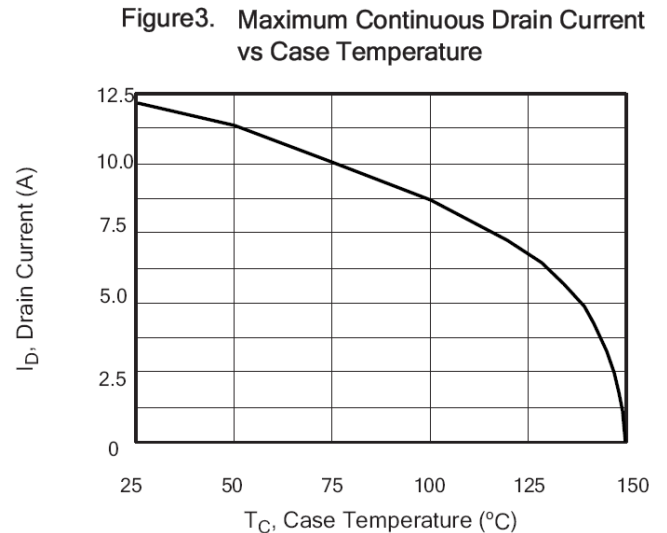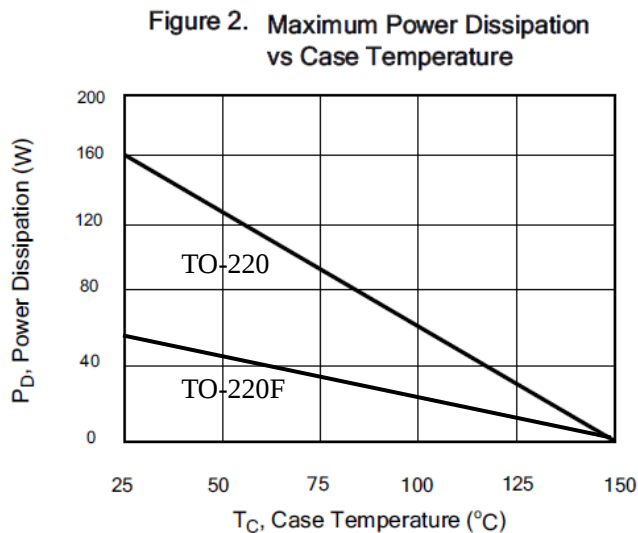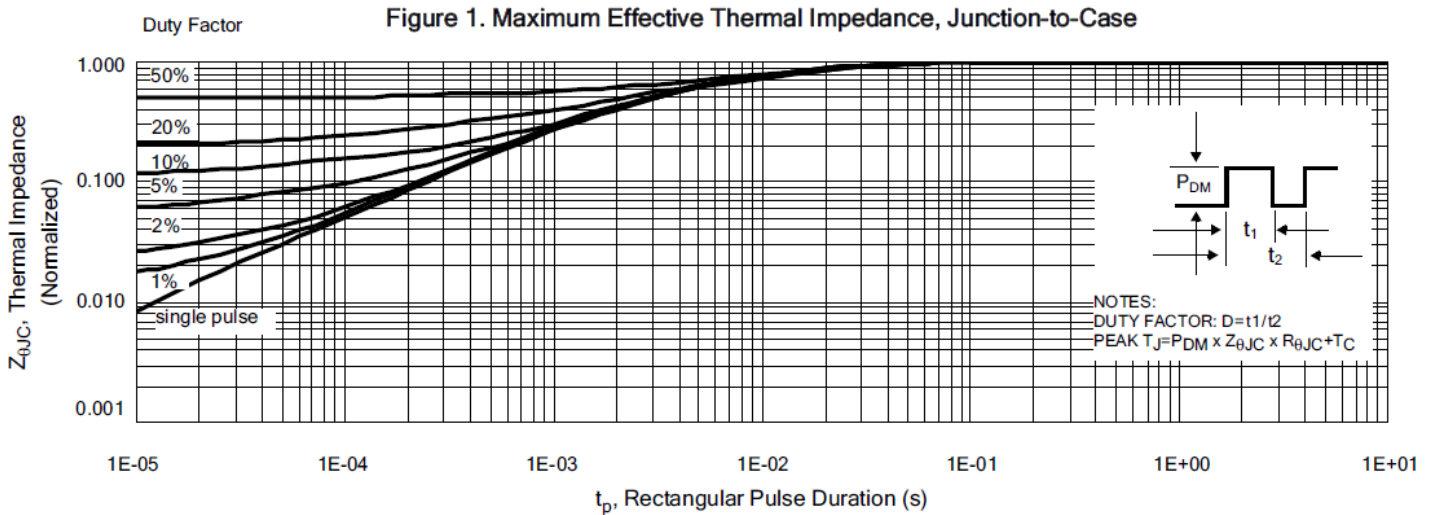

Typical Characteristics(Cont.)

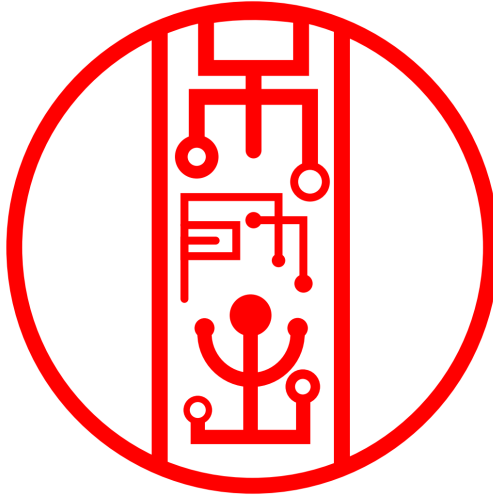


Figure 7. Typical Transfer Characteristics

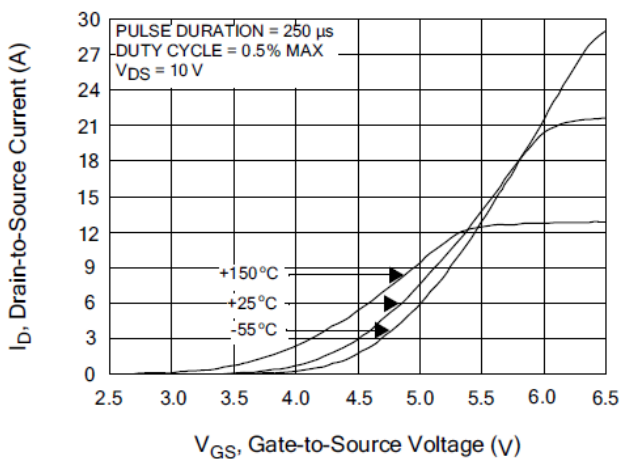


Figure 9. Typical Drain-to-Source ON Resistance vs Drain Current

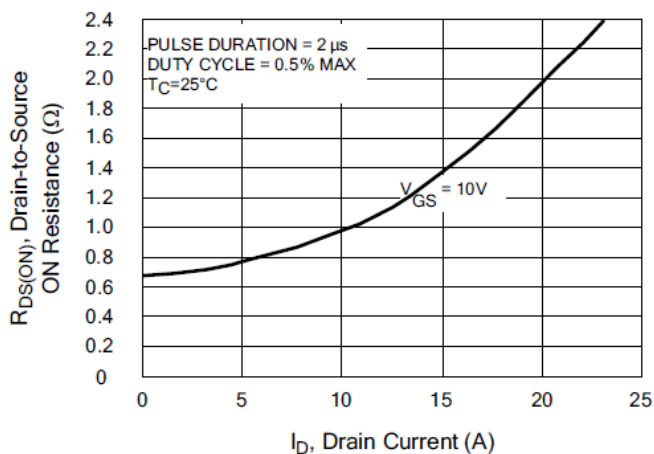


Figure 8. Unclamped Inductive Switching Capability



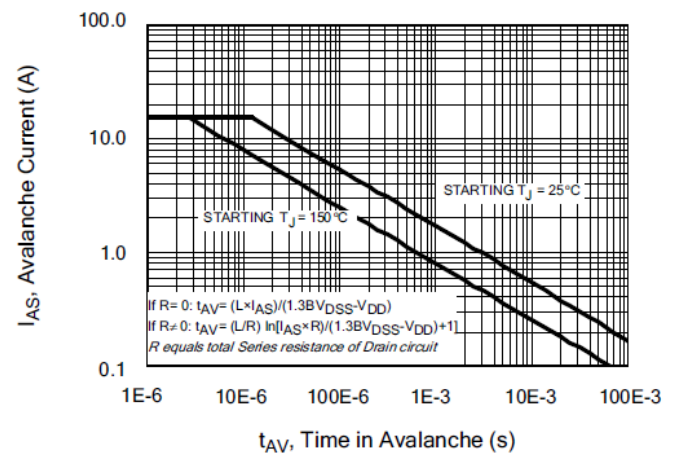


Figure 10. Typical Drain-to-Source ON Resistance vs Junction Temperature

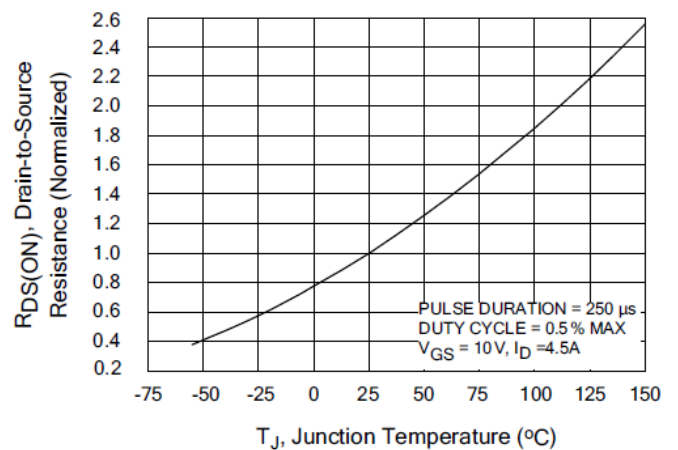



SK12N80B-T-TF

Typical Characteristics(Cont.)

Figure 11. Typical Breakdown Voltage vs Junction Temperature

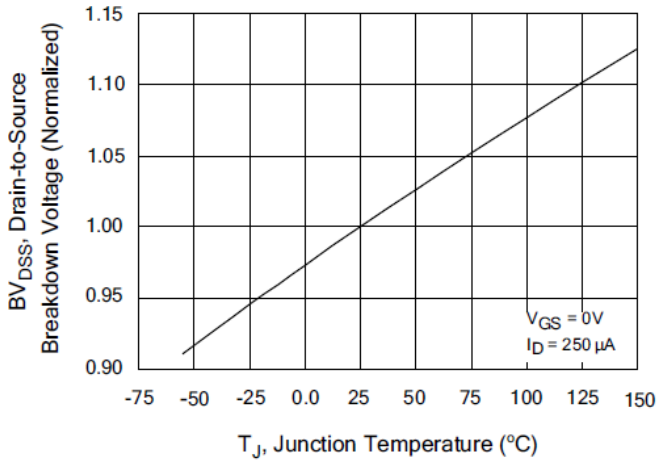


Figure 12. Typical Threshold Voltage vs Junction Temperature

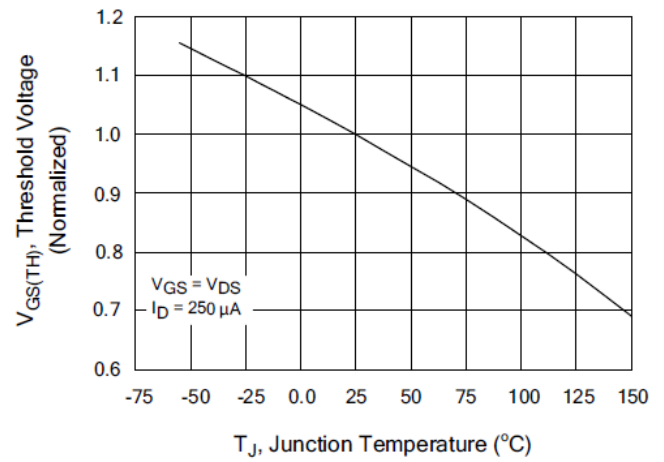


Figure 13. Maximum Forward Bias Safe Operating Area

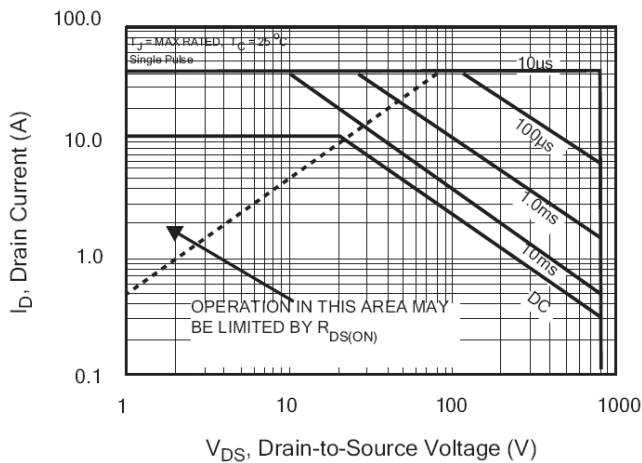


Figure 14. Typical Capacitance vs Drain-to-Source Voltage

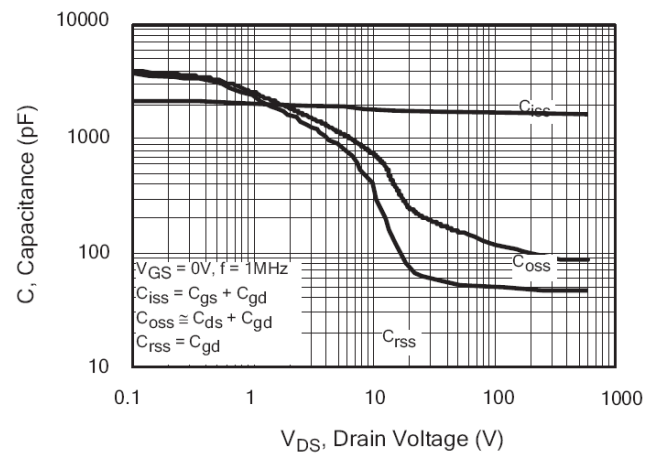


Figure 15. Typical Gate Charge vs Gate-to-Source Voltage


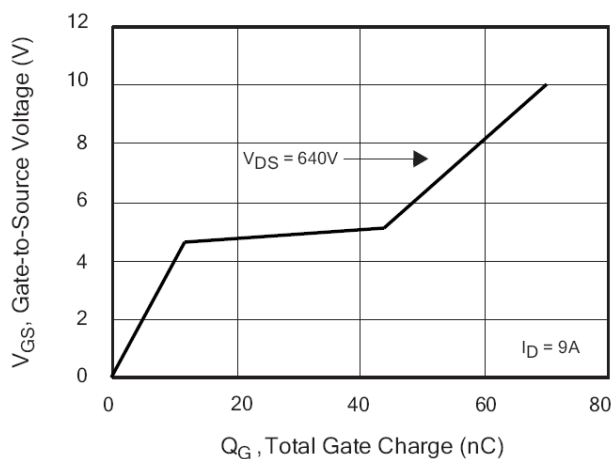


Figure 16. Typical Body Diode Transfer Characteristics



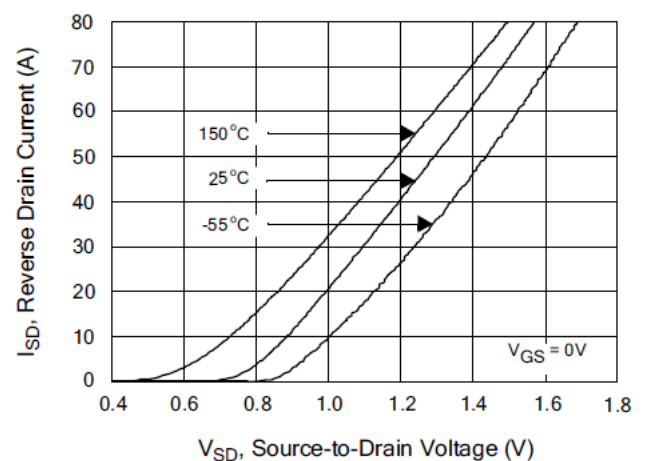

SK12N80B-T-TF

Test Circuits and Waveforms

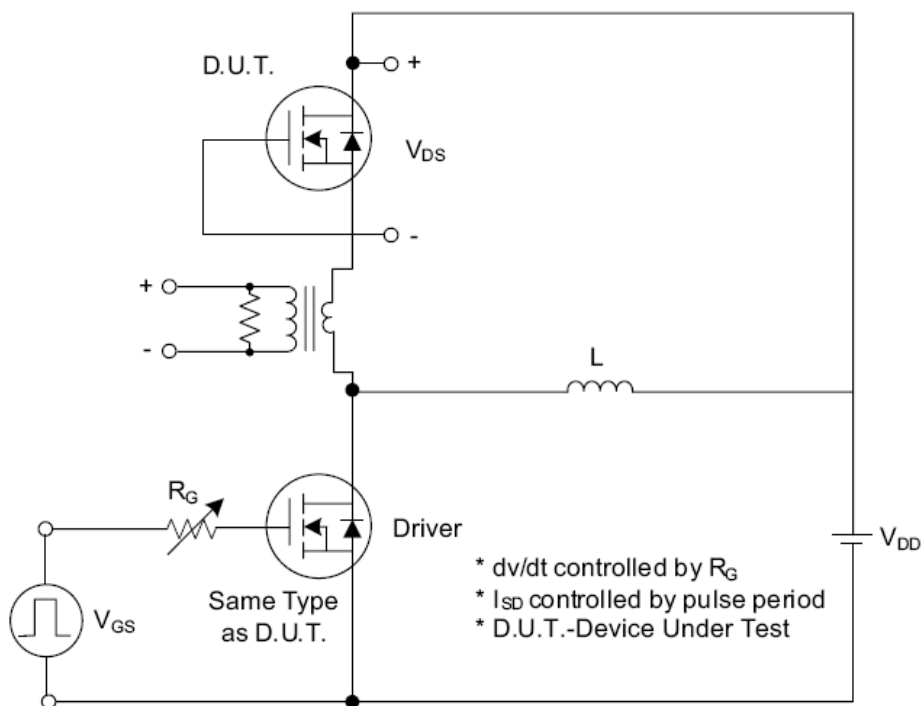


Fig. 1.1 Peak Diode Recovery dv/dt Test Circuit

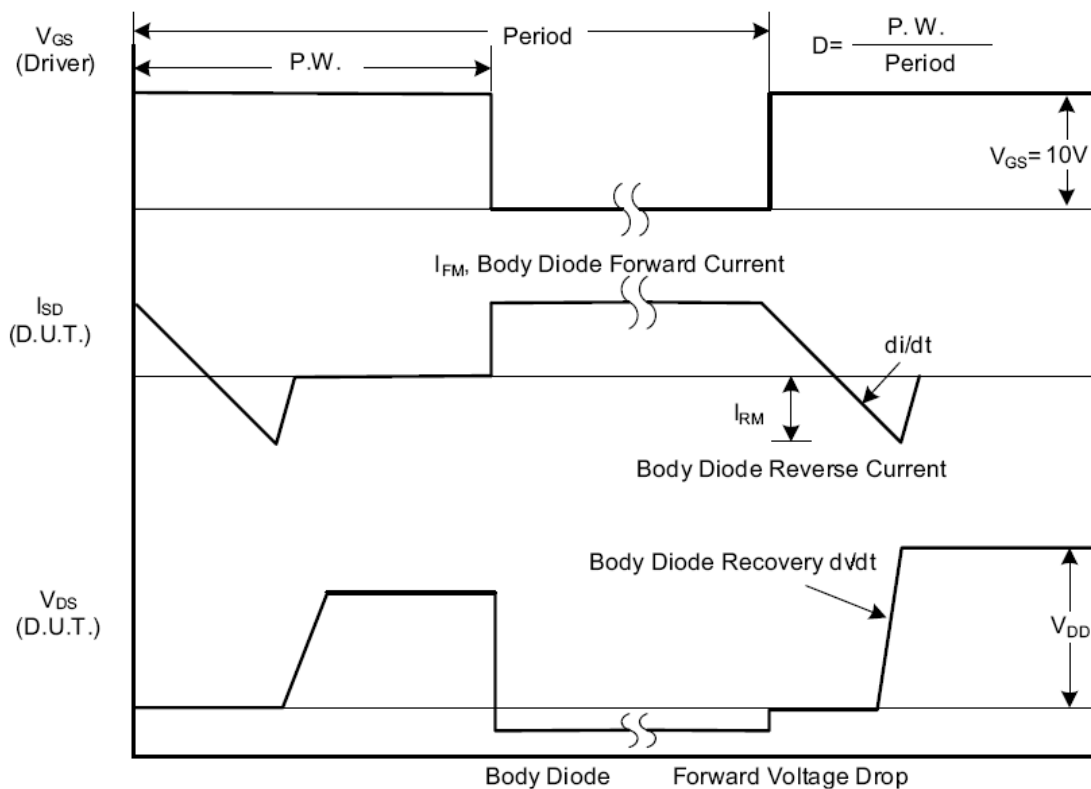


Fig. 1.2 Peak Diode Recovery dv/dt Waveforms



SK12N80B-T-TF

Test Circuits and Waveforms (Cont.)

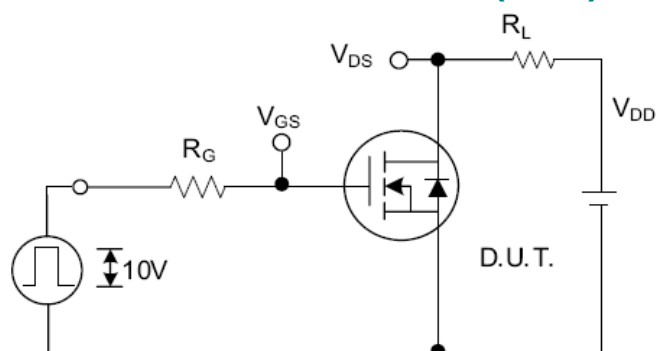


Fig. 2.1 Switching Test Circuit

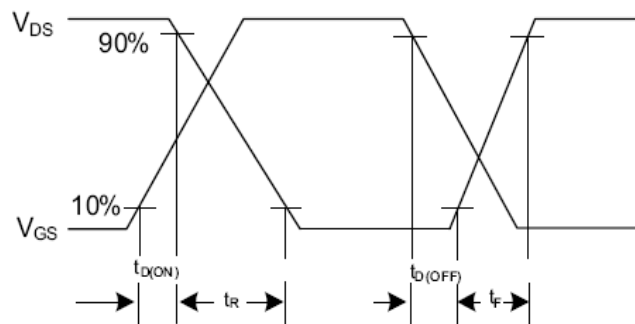


Fig. 2.2 Switching Waveforms

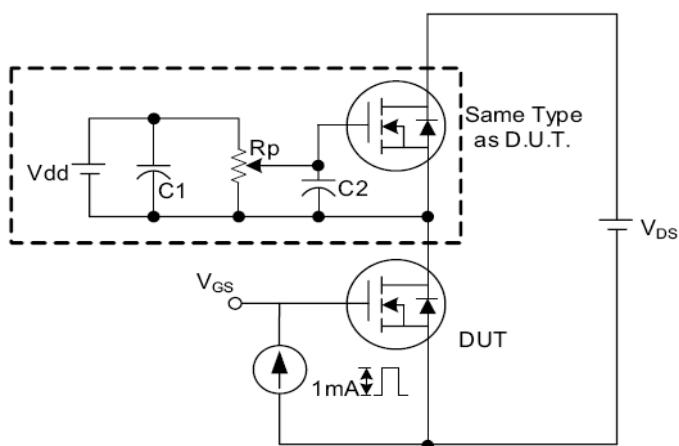


Fig. 3.1 Gate Charge Test Circuit

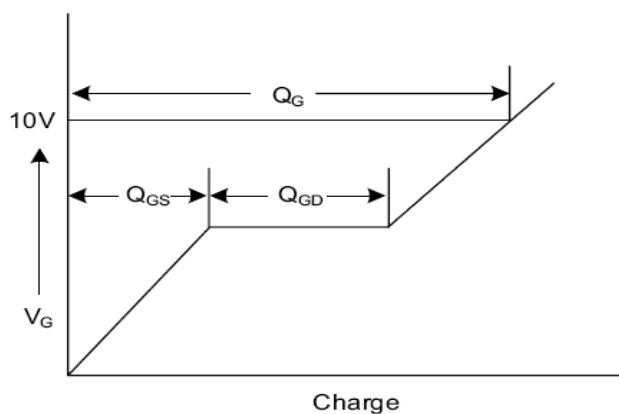


Fig. 3.2 Gate Charge Waveform

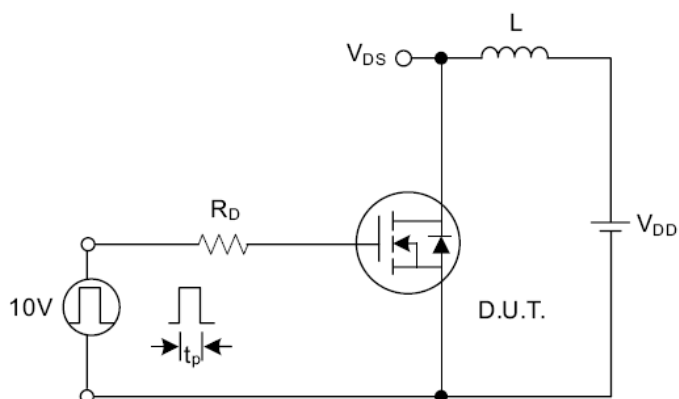


Fig. 4.1 Unclamped Inductive Switching Test Circuit


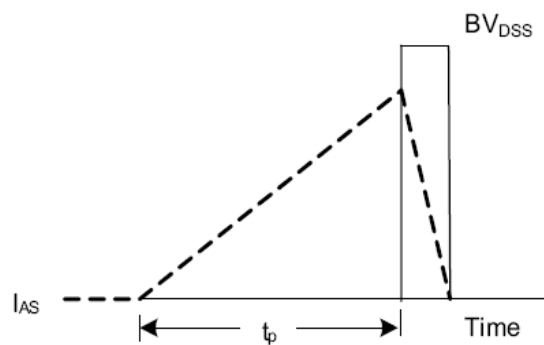


Fig. 4.2 Unclamped Inductive Switching Waveforms

PACKAGE OUTLINE


TO-220

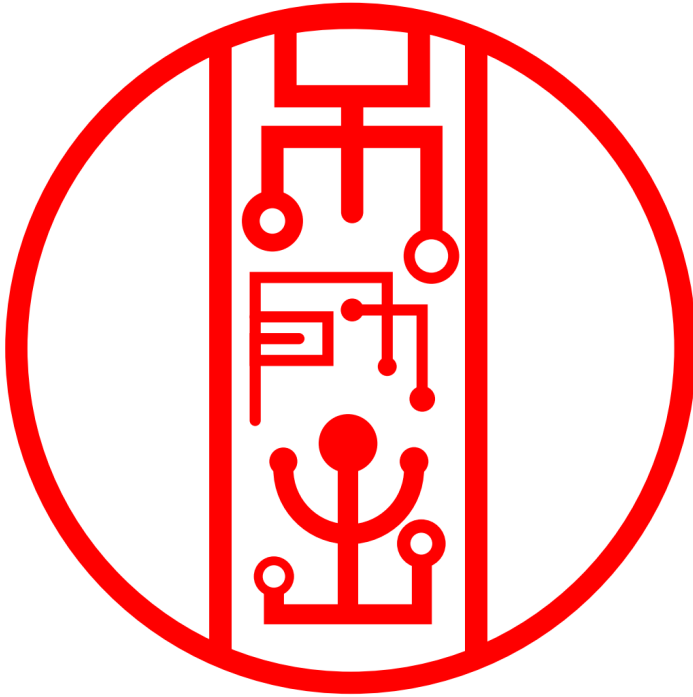

	Unit (mm)	
	MIN	MAX
A	10.1	10.5
B	15.2	15.6
B1	9.00	9.40
C	4.40	4.60
C1	2.40	3.00
D	1.20	1.40
E	0.70	0.90
F	0.40	0.60
G	1.17	1.37
H	3.30	3.80
L	13.1	13.7
N	2.34	2.74
Q	2.40	3.00
Φ P	3.70	3.90

PACKAGE OUTLINE

TO-220F

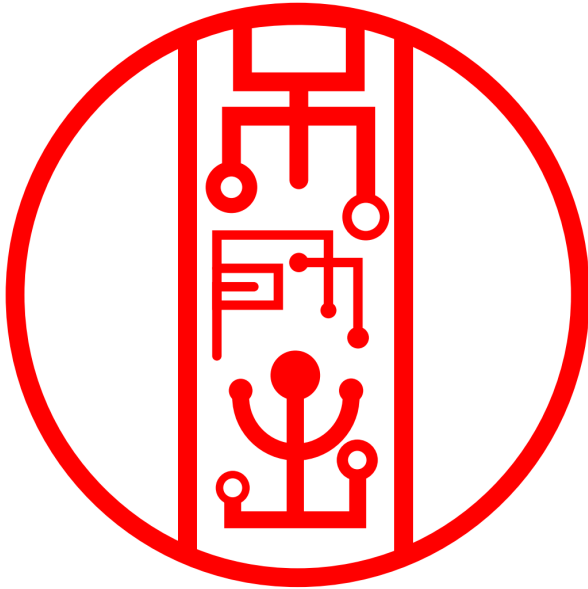

	Unit (mm)	
	MIN	MAX
A	9.70	10.30
B	15.50	16.10
B1	8.99	9.39
C	4.40	4.80
C1	2.15	2.55
D	2.50	2.90
E	0.70	0.90
F	0.40	0.60
G	1.12	1.42
H	3.40	3.80
L	12.6	13.6
N	2.34	2.74
Q	3.15	3.55
Φ P	3.00	3.30