




## SEPCIFICATIONS

### SKCB1005 TYPE

| Part Number  | Impedance | Z Test Frequency | Max. DC Resistance | Max. Rated Current | Thickness |
|--------------|-----------|------------------|--------------------|--------------------|-----------|
| Units        | $\Omega$  | MHz/V            | $\Omega$           | mA                 | mm        |
| Symbol       | Z         | Freq.            | DCR                | I <sub>r</sub>     | T         |
| SKCB1005-100 | 1~15      | 100/0.05         | 0.15               | 550                | 0.5±0.15  |
| SKCB1005-190 | 19±25%    | 100/0.05         | 0.20               | 500                |           |
| SKCB1005-260 | 26±25%    | 100/0.05         | 0.25               | 400                |           |
| SKCB1005-310 | 31±25%    | 100/0.05         | 0.25               | 350                |           |
| SKCB1005-470 | 47±25%    | 100/0.05         | 0.30               | 300                |           |
| SKCB1005-500 | 50±25%    | 100/0.05         | 0.30               | 250                |           |
| SKCB1005-600 | 60±25%    | 100/0.05         | 0.30               | 250                |           |
| SKCB1005-700 | 70±25%    | 100/0.05         | 0.35               | 250                |           |
| SKCB1005-800 | 80±25%    | 100/0.05         | 0.35               | 250                |           |
| SKCB1005-101 | 100±25%   | 100/0.05         | 0.40               | 200                |           |
| SKCB1005-121 | 120±25%   | 100/0.05         | 0.40               | 200                |           |
| SKCB1005-151 | 150±25%   | 100/0.05         | 0.45               | 150                |           |
| SKCB1005-201 | 200±25%   | 100/0.05         | 0.45               | 150                |           |
| SKCB1005-221 | 220±25%   | 100/0.05         | 0.45               | 150                |           |
| SKCB1005-301 | 300±25%   | 100/0.05         | 0.50               | 120                |           |
| SKCB1005-501 | 500±25%   | 100/0.05         | 0.80               | 100                |           |
| SKCB1005-601 | 600±25%   | 100/0.05         | 0.90               | 100                |           |
| SKCB1005-751 | 750±25%   | 100/0.05         | 1.00               | 100                |           |
| SKCB1005-801 | 800±25%   | 100/0.05         | 1.00               | 100                |           |
| SKCB1005-102 | 1000±25%  | 100/0.05         | 1.20               | 50                 |           |
| SKCB1005-122 | 1200±25%  | 100/0.05         | 1.60               | 40                 |           |
| SKCB1005-152 | 1500±25%  | 100/0.05         | 2.20               | 30                 |           |
| SKCB1005-202 | 2000±25%  | 100/0.05         | 2.60               | 30                 |           |

### SKCB1608 TYPE

| Part Number  | Impedance | Z Test Frequency | Max. DC Resistance | Max. Rated Current | Thickness |
|--------------|-----------|------------------|--------------------|--------------------|-----------|
| Units        | $\Omega$  | MHz/V            | $\Omega$           | mA                 | mm        |
| Symbol       | Z         | Freq.            | DCR                | I <sub>r</sub>     | T         |
| SKCB1608-000 | 1~15      | 100/0.05         | 0.05               | 2000               | 0.8±0.15  |
| SKCB1608-190 | 19±25%    | 100/0.05         | 0.07               | 2000               |           |
| SKCB1608-260 | 26±25%    | 100/0.05         | 0.07               | 2000               |           |
| SKCB1608-310 | 31±25%    | 100/0.05         | 0.07               | 2000               |           |
| SKCB1608-470 | 47±25%    | 100/0.05         | 0.07               | 1000               |           |



## SKCB Series

### SKCB1608 TYPE

| Part Number  | Impedance | Z Test Frequency | Max. DC Resistance | Max. Rated Current | Thickness |
|--------------|-----------|------------------|--------------------|--------------------|-----------|
| Units        | $\Omega$  | MHz/V            | $\Omega$           | mA                 | mm        |
| Symbol       | Z         | Freq.            | DCR                | I <sub>r</sub>     | T         |
| SKCB1608-600 | 60±25%    | 100/0.05         | 0.08               | 600                | 0.8±0.15  |
| SKCB1608-800 | 80±25%    | 100/0.05         | 0.12               | 600                |           |
| SKCB1608-101 | 100±25%   | 100/0.05         | 0.14               | 500                |           |
| SKCB1608-121 | 120±25%   | 100/0.05         | 0.16               | 400                |           |
| SKCB1608-151 | 150±25%   | 100/0.05         | 0.16               | 400                |           |
| SKCB1608-181 | 180±25%   | 100/0.05         | 0.25               | 300                |           |
| SKCB1608-221 | 220±25%   | 100/0.05         | 0.30               | 300                |           |
| SKCB1608-301 | 300±25%   | 100/0.05         | 0.35               | 300                |           |
| SKCB1608-471 | 470±25%   | 100/0.05         | 0.35               | 300                |           |
| SKCB1608-501 | 500±25%   | 100/0.05         | 0.35               | 300                |           |
| SKCB1608-601 | 600±25%   | 100/0.05         | 0.40               | 300                |           |
| SKCB1608-751 | 750±25%   | 100/0.05         | 0.50               | 300                |           |
| SKCB1608-102 | 1000±25%  | 100/0.05         | 0.55               | 250                |           |
| SKCB1608-122 | 1200±25%  | 50/0.05          | 0.60               | 200                |           |
| SKCB1608-152 | 1500±25%  | 50/0.05          | 0.85               | 200                |           |
| SKCB1608-182 | 1800±25%  | 50/0.05          | 1.00               | 150                |           |
| SKCB1608-202 | 2000±25%  | 50/0.05          | 1.10               | 150                |           |
| SKCB1608-222 | 2200±25%  | 50/0.05          | 1.20               | 150                |           |
| SKCB1608-252 | 2500±25%  | 50/0.05          | 1.40               | 80                 |           |
| SKCB1608-302 | 3000±25%  | 50/0.05          | 1.80               | 50                 |           |

### SKCB2012 TYPE

| Part Number  | Impedance | Z Test Frequency | Max. DC Resistance | Max. Rated Current | Thickness |
|--------------|-----------|------------------|--------------------|--------------------|-----------|
| Units        | $\Omega$  | MHz/V            | $\Omega$           | mA                 | mm        |
| Symbol       | Z         | Freq.            | DCR                | I <sub>r</sub>     | T         |
| SKCB2012-070 | 1~15      | 100/0.05         | 0.02               | 2000               | 0.85±0.10 |
| SKCB2012-190 | 19±25%    | 100/0.05         | 0.02               | 2000               |           |
| SKCB2012-300 | 30±25%    | 100/0.05         | 0.03               | 2000               |           |
| SKCB2012-470 | 47±25%    | 100/0.05         | 0.05               | 1500               |           |
| SKCB2012-600 | 60±25%    | 100/0.05         | 0.06               | 1200               |           |
| SKCB2012-800 | 80±25%    | 100/0.05         | 0.08               | 1200               |           |
| SKCB2012-101 | 100±25%   | 100/0.05         | 0.10               | 1000               |           |
| SKCB2012-121 | 120±25%   | 100/0.05         | 0.10               | 1000               |           |
| SKCB2012-181 | 180±25%   | 100/0.05         | 0.12               | 800                |           |
| SKCB2012-221 | 220±25%   | 100/0.05         | 0.15               | 650                |           |
| SKCB2012-301 | 300±25%   | 100/0.05         | 0.20               | 650                |           |
| SKCB2012-421 | 420±25%   | 100/0.05         | 0.20               | 650                |           |
| SKCB2012-501 | 500±25%   | 100/0.05         | 0.22               | 650                |           |
| SKCB2012-601 | 600±25%   | 100/0.05         | 0.25               | 650                |           |
| SKCB2012-751 | 750±25%   | 100/0.05         | 0.28               | 550                |           |
| SKCB2012-102 | 1000±25%  | 100/0.05         | 0.35               | 550                |           |
| SKCB2012-152 | 1500±25%  | 50/0.05          | 0.45               | 350                |           |
| SKCB2012-202 | 2000±25%  | 50/0.05          | 0.55               | 250                |           |
| SKCB2012-252 | 2500±25%  | 50/0.05          | 0.70               | 200                |           |









## SKCB3216 TYPE


| Part Number  | Impedance | Z Test Frequency | Max. DC Resistance | Max. Rated Current | Thickness |
|--------------|-----------|------------------|--------------------|--------------------|-----------|
| Units        | $\Omega$  | MHz/V            | $\Omega$           | mA                 | mm        |
| Symbol       | Z         | Freq.            | DCR                | I <sub>r</sub>     | T         |
| SKCB3216-000 | 1~15      | 100/0.05         | 0.02               | 2500               | 0.85±0.10 |
| SKCB3216-190 | 19±25%    | 100/0.05         | 0.03               | 2500               |           |
| SKCB3216-260 | 26±25%    | 100/0.05         | 0.04               | 2500               |           |
| SKCB3216-310 | 31±25%    | 100/0.05         | 0.04               | 2200               |           |
| SKCB3216-470 | 47±25%    | 100/0.05         | 0.05               | 1500               |           |
| SKCB3216-600 | 60±25%    | 100/0.05         | 0.05               | 1200               |           |
| SKCB3216-800 | 80±25%    | 100/0.05         | 0.05               | 1200               |           |
| SKCB3216-101 | 100±25%   | 100/0.05         | 0.05               | 1200               |           |
| SKCB3216-121 | 120±25%   | 100/0.05         | 0.06               | 1200               |           |
| SKCB3216-181 | 180±25%   | 100/0.05         | 0.08               | 800                |           |
| SKCB3216-221 | 220±25%   | 100/0.05         | 0.10               | 800                |           |
| SKCB3216-301 | 300±25%   | 100/0.05         | 0.10               | 800                |           |
| SKCB3216-421 | 4200±25%  | 100/0.05         | 0.15               | 800                |           |
| SKCB3216-501 | 500±25%   | 100/0.05         | 0.20               | 650                |           |
| SKCB3216-601 | 600±25%   | 100/0.05         | 0.20               | 650                |           |
| SKCB3216-801 | 800±25%   | 100/0.05         | 0.35               | 550                |           |
| SKCB3216-102 | 1000±25%  | 100/0.05         | 0.40               | 550                |           |
| SKCB3216-122 | 1200±25%  | 50/0.05          | 0.45               | 400                |           |
| SKCB3216-152 | 1500±25%  | 50/0.05          | 0.55               | 300                |           |
| SKCB3216-202 | 2000±25%  | 50/0.05          | 0.60               | 250                |           |
| SKCB3216-252 | 2500±25%  | 50/0.05          | 1.00               | 100                |           |

## TYPICAL ELECTRICAL CHARACTERISTICS


### SKCB1005 TYPE

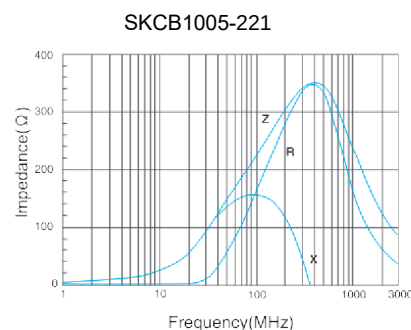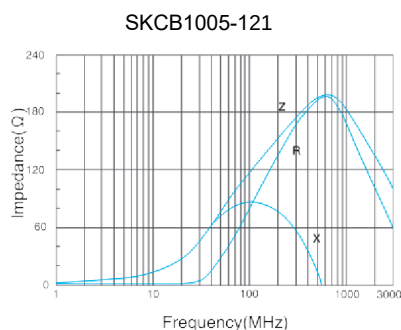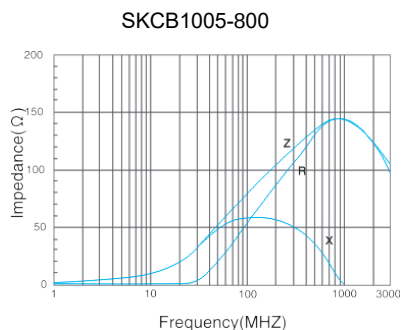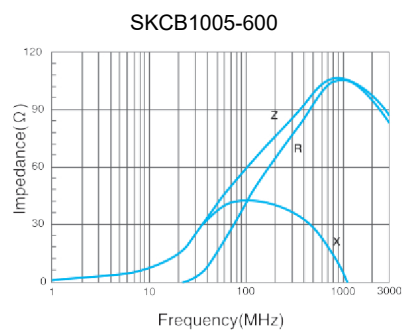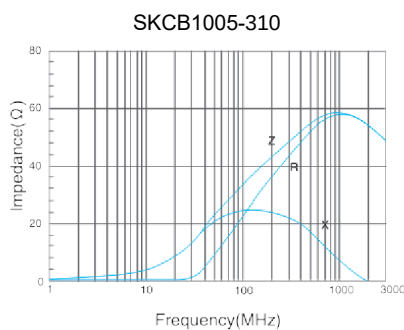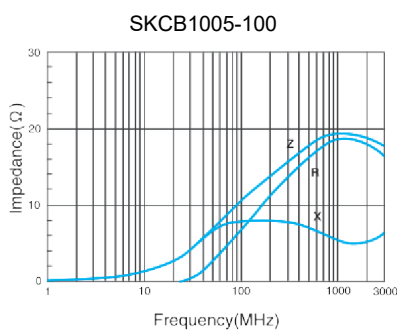





6 . & % 301



6 . & % 421

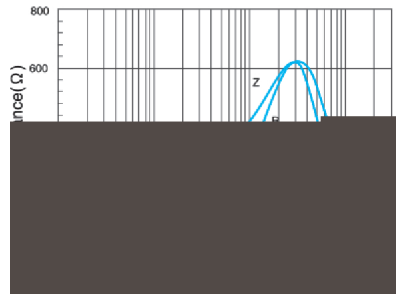


6 . & %

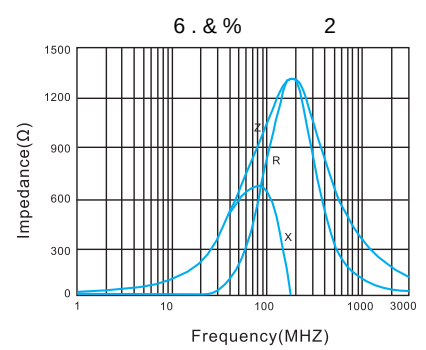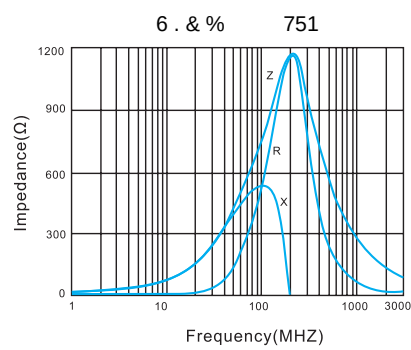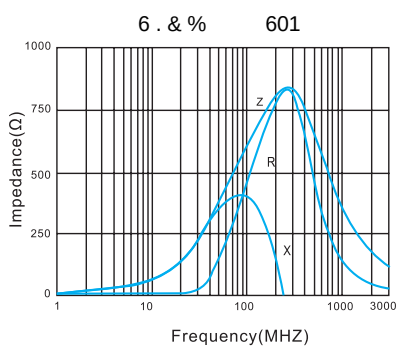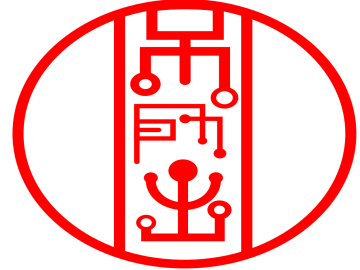


## SKCB1608 TYPE


6 . & % 608



6 . & % 608 30




6 . & % 60800





6 . & % 60800

6 . & % 608




6 . & % 608 21






6 . & % 608 221




6 . & % 608 301




6 . & % 608 471

6 . & % 608 601



6 . & % 608 751




6 . & % 608 102

6 . & % 608 152

6 . & % 608 182

6 . & % 608 202

6 . & % 608 222



## SKCB2012 TYPE

6 . & %012 070

6 . & %012 190

6 . & %012 300

6 . & %012 800



6 . & %012 121

6 . & %012 181

6 . & %012 221

6 . & %012 301


6 . & %012 421




6 . & %012 501

6 . & %012 601

6 . & %012 751





6 . & % 012 102

6 . & % 012 152


6 . & % 012 202

## SKCB3216 TYPE

6 . & % 216 000

6 . & % 216 310

6 . & % 216 600




6 . & % 216 800


6 . & % 216 121

6 . & % 216 221

6 . & % 216 301








6 . & %216 501

6 . & %216 601



6 . & %216 102

6 . & %216 122

