



SL05

Ultra Low Capacitance ESD Protection Diode

DESCRIPTION


The SL05 is an ultra low capacitance ESD protection diode, designed to protect sensitive electronics such as communications systems, computers, and computer peripherals against damage due to ESD conditions or transient voltage conditions. Because of its ultra low capacitance value (less than 1 pF), It can be used in high speed I/O data lines. It is rated at 350 Watts for an 8/20 μ s wave shape.

The SL05 meets IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT) requirements. At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. It offers ultra low capacitance and low leakage current in a miniature SOT-23 package.

ORDERING INFORMATION

- ✧ Device: SL05
- ✧ Package: SOT-23
- ✧ Material: Halogen free
- ✧ Packing: Tape & Reel
- ✧ Quantity per reel: 3,000pcs

PIN CONFIGURATION




FEATURES

- ✧ IEC61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
 - ✧ IEC61000-4-4 (EFT) 40A
 - ✧ 350 Watts Peak Pulse Power per (tp=8/20 μ s)
 - ✧ Protects on unidirectional line.
 - ✧ Low clamping voltage
 - ✧ Working voltages :5V
 - ✧ Low leakage current
- ### MECHANICAL DATA
- ✧ SOT-23 package
 - ✧ Flammability Rating: UL 94V-0
 - ✧ Packaging: Tape and Reel
 - ✧ High temperature soldering guaranteed: 260 $^{\circ}\text{C}$ /10s
 - ✧ Reel size: 7 inch
 - ✧ MSL 1

APPLICATIONS

- ✧ Communications systems
- ✧ Microprocessor based equipment
- ✧ Personal Digital Assistants (PDA's)
- ✧ Notebooks, Desktops, and Servers
- ✧ Portable Instrumentation
- ✧ Serial and Parallel Ports.
- ✧ Computer Peripherals

PACKAGE OUTLINE





SL05


ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Value	Units
V_{ESD}	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	± 15 ± 8	kV
P_{PP}	Peak Pulse Power (8/20 μ s)	350	W
T_{OPT}	<i>REV.08</i> Operating Temperature	2 of 4-55/+150	°C
T_{STG}	Storage Temperature	-55/+150	°C
T_L	Lead Soldering Temperature	260 (10 sec.)	°C

ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}C$)

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V_{RWM}	Reverse Working Voltage				5.0	V
V_{BR}	Reverse Breakdown Voltage	$I_T = 1mA$	6.0		8.0	V
I_R	Reverse Leakage Current	$V_{RWM} = 5.0V$			1.0	μA
V_C	Clamping Voltage	$I_{PP} = 1A, t_p = 8/20\mu s$			9.8	V
		$I_{PP} = 5A, t_p = 8/20\mu s$			11.0	V
		$I_{PP} = 18A, t_p = 8/20\mu s$			20.0	V
C_J	Junction Capacitance	$V_R = 0V, f = 1MHz$		0.4	1.0	pF

ELECTRICAL CHARACTERISTICS CURVE

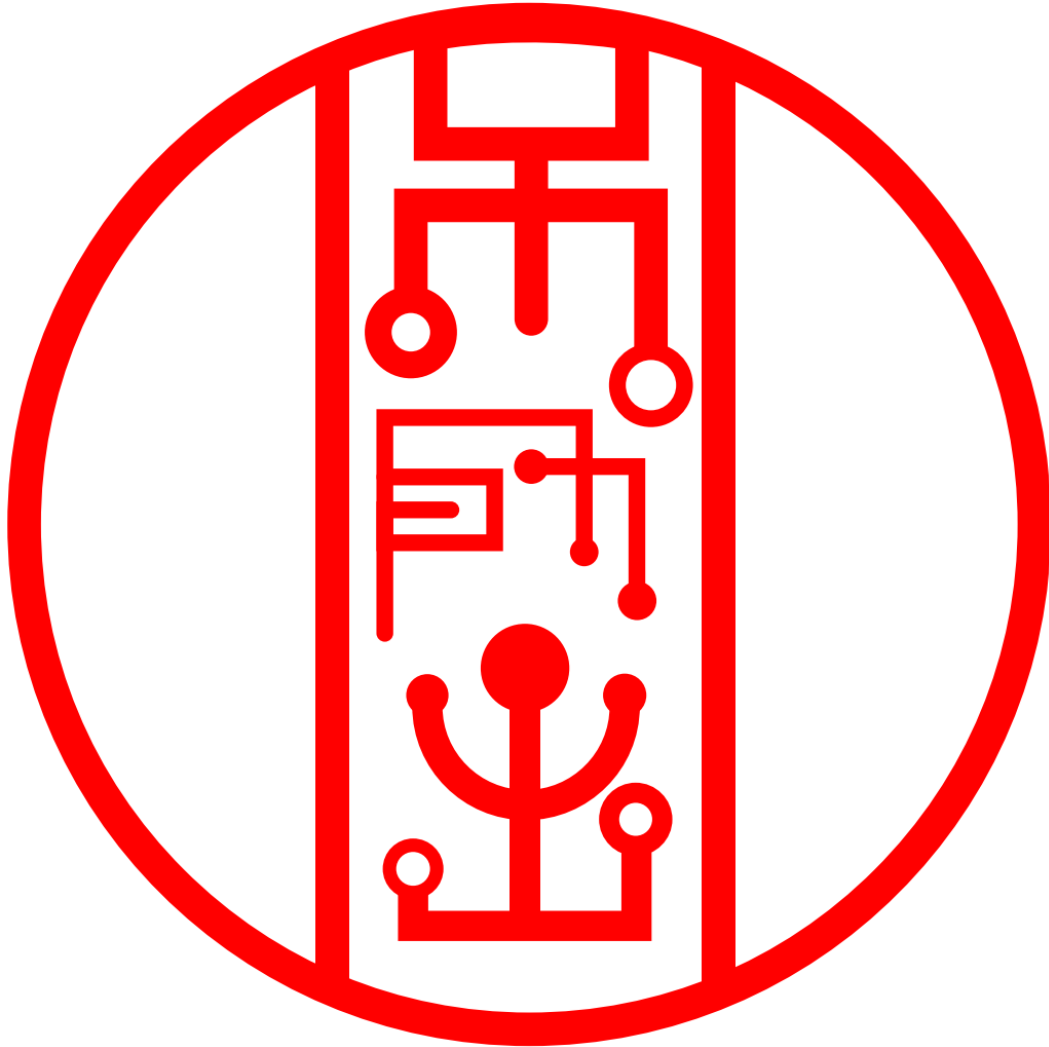

SOT-23 PACKAGE OUTLINE DIMENSIONS

