



Low Noise JFET Input Dual Operational Amplifiers

Description

TL072 is a low-noise JFET input dual operational amplifier composed of high-voltage JFETs and bipolar transistors. It features a high slew rate, low input bias current, low input offset current, and a low offset voltage temperature coefficient.

TL072 is available in DIP-8 and SOP-8 package types.


Features

- Low power consumption: 1.4mA/ch
- Low input bias current: 200pA
- Low input offset current: 50pA
- Low noise
- High input impedance
- Low distortion: approximately 0.01%
- High slew rate: 13V/ μ S
- High gain bandwidth product: 3MHz


Applications

- Solar energy systems
- Motor drivers
- Single-phase UPS
- Professional audio mixers
- Battery testing equipment

Package Outline Drawing

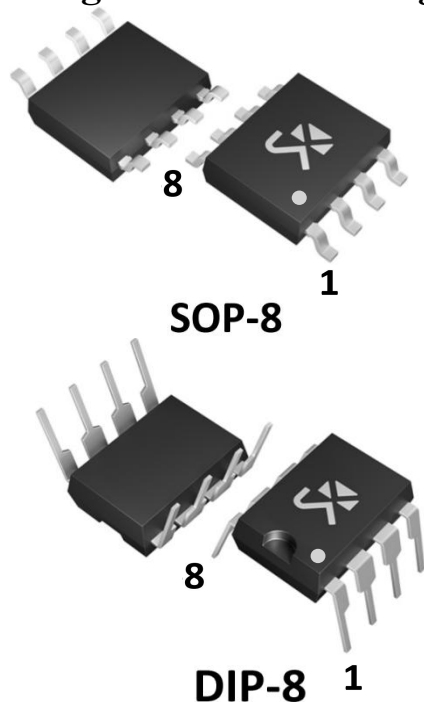

Block Diagram

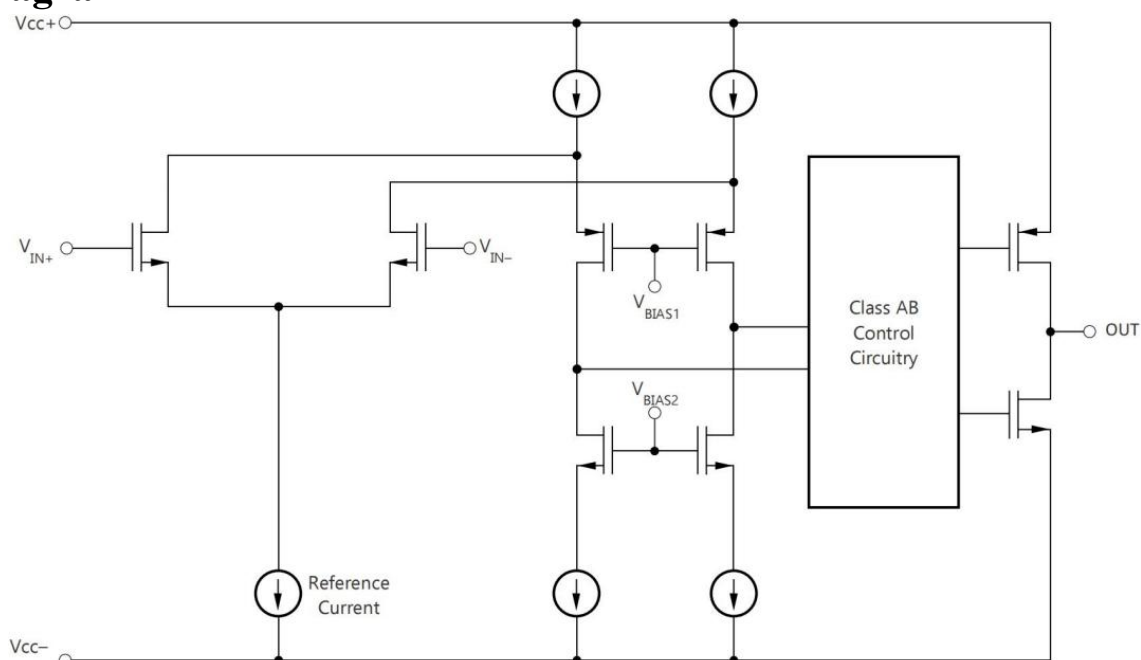




TL072

Ordering Information

Type	Marking	Package
TL072-D8	TL072	DIP-8
TL072-P8	TL072	SOP-8

Pin Description

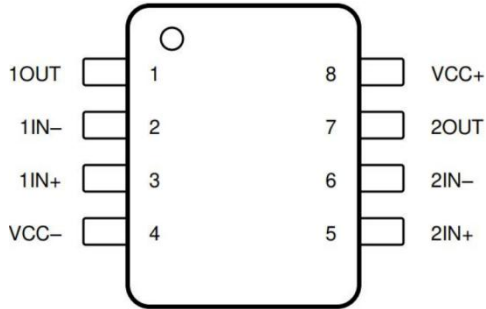
Pin Number	Pin Name	I/O	Description	
1	1OUT	O	Channel 1 Output	
2	1IN-	I	Channel 1 Inverting Input	
3	1IN+	I	Channel 1 Non-Inverting Input	
4	V _{CC} -	P	Negative Power Supply	
5	2IN+	I	Channel 2 Non-Inverting Input	
6	2IN-	I	Channel 2 Inverting Input	
7	2OUT	O	Channel 2 Output	
8	V _{CC} +	P	Positive Power Supply	

Absolute Maximum Ratings (T_A=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Supply Voltage	V _{CC}	±18	V
Input Voltage	V _I	±15	V
Differential Input Voltage	V _{ID}	±30	V
Maximum Operating Junction Temperature	T _J	150	°C
Storage Temperature	T _{STG}	-65~+150	°C
Lead Temperature(Soldering , 10 s)	T _W	260	°C

Recommended Operating Conditions(T_A=25°C unless otherwise noted)

Parameter	Symbol	Min	Max	Unit
Positive Power Supply	V _{CC} +	+5	+15	V
Negative Power Supply	V _{CC} -	-5	-15	V
Common Mode Input Voltage	V _{CM}	(V _{CC} -)+4	(V _{CC} +) -4	V
Operating Temperature Range	T _A	-20	+85	°C
Operating Junction Temperature	T _J	-20	+125	°C



Electrical Characteristics ($T_A=25^{\circ}\text{C}$, $V_{CC+}=15\text{V}$, $V_{CC-}=-15\text{V}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Supply Current(per channel)	I_{CC}	$V_O=0\text{V}, R_L=\infty$	-	1.4	2.8	mA
Input Offset Voltage	V_{IO}	$V_O=0\text{V}$	-	± 2	± 6	mV
Input Offset Current	I_{IO}	$V_O=0\text{V}$	-	± 50	-	pA
Input Bias Current	I_B	$V_O=0\text{V}$	-	± 200	-	pA
Input Common-mode Voltage	V_{ICM}		± 11	-	-	V
Output Voltage swing	V_{OM}	$R_L=10\text{K}\Omega$	± 12	± 13.5	-	V
		$R_L=2\text{K}\Omega$	± 10	± 12	-	
Output Short-circuit Current	I_{SC}	$V_O=0\text{V}$	± 40	± 60	± 80	mA
Open-Loop Voltage Gain	A_{OL}	$V_O=\pm 10\text{V}, R_L<2\text{K}\Omega$	-	100	-	V/mV
Common Mode Rejection Ratio	CMRR		-	95	-	dB
Power Supply Rejection Ratio	PSRR		-	100	-	dB
Gain Bandwidth Product	GBWP		-	3	-	MHz
Slew Rate	S_R		8	13	-	V/uS
Input Impedance	R_I		-	10^{12}	-	Ω

Typical Applications

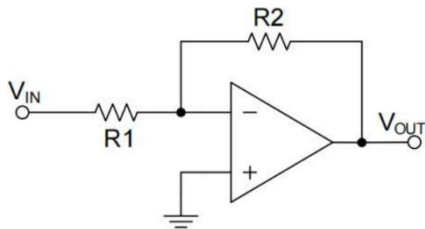


Figure 1. Inverting Amplifier

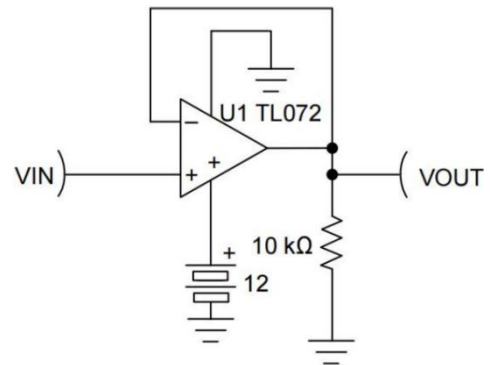


Figure 2. Single Supply Unity Gain Amplifier

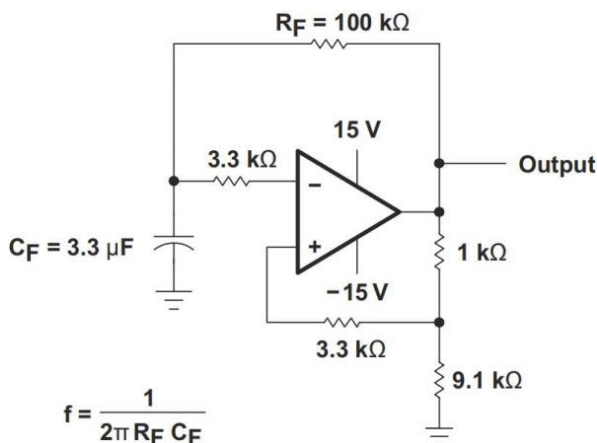


Figure 3. 0.5Hz Square Wave Oscillator

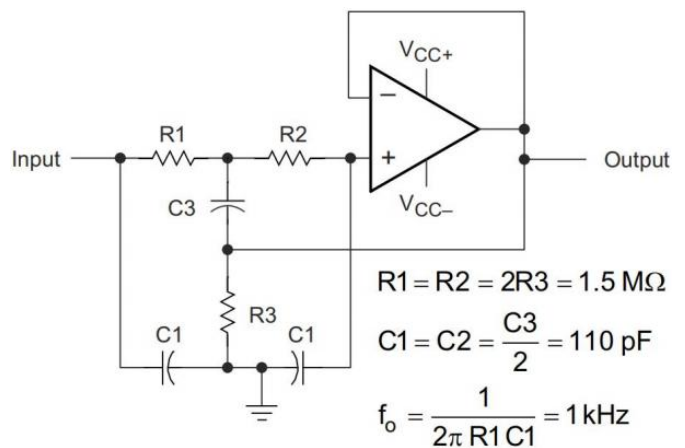


Figure 4. High Q Notch Filter



Typical Characteristics

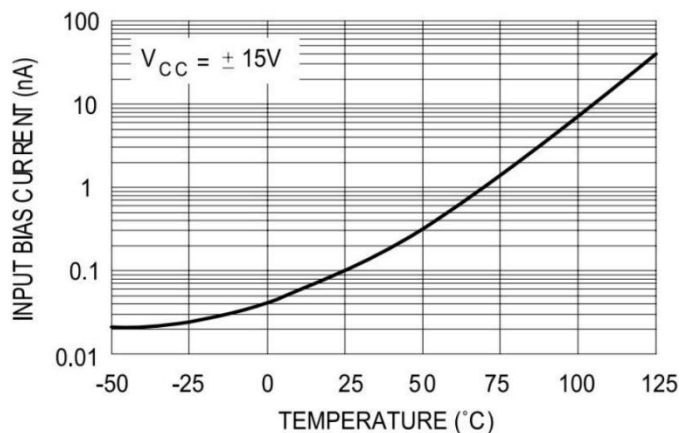


Fig 5. Input Bias Current vs. Ambient Temperature

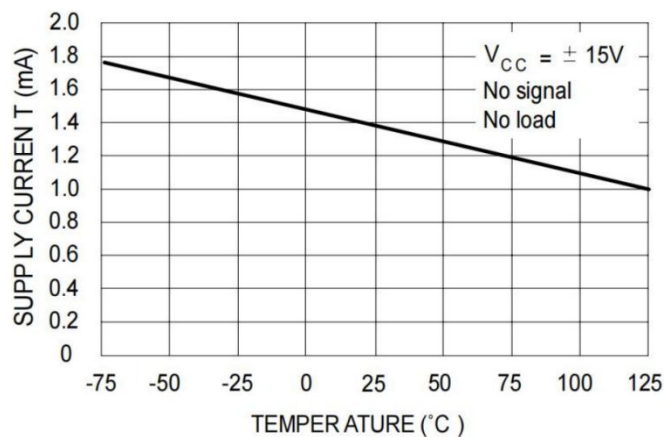


Fig 6. Supply Current vs. Ambient Temperature(per Channel)

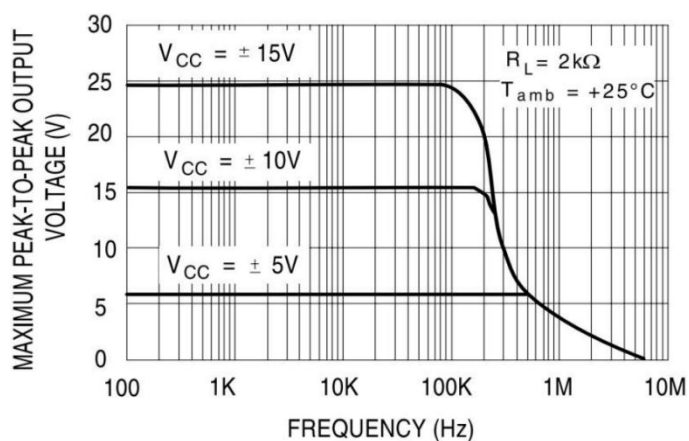


Fig 7. Maximum Output Voltage Swing vs. Frequency($R_L=2K\Omega$)

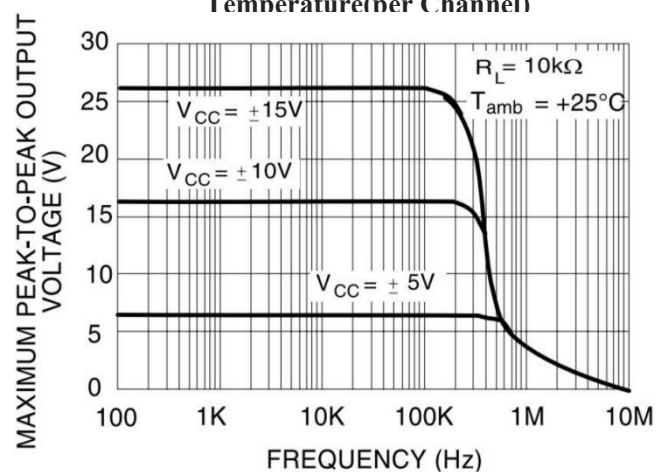


Fig 8. Maximum Output Voltage Swing vs. Frequency($R_L=10K\Omega$)

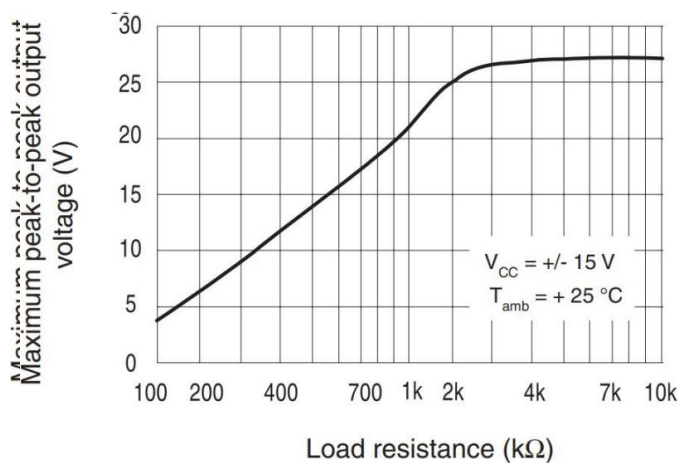


Fig 9. Maximum Output Voltage swing vs. Load Resistance

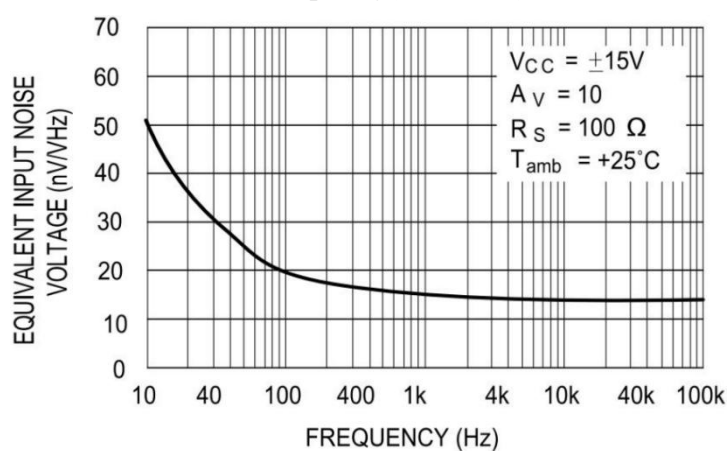



Fig 10. Input Noise Voltage vs. Frequency



Package Information

SOP-8

Dimensions in mm

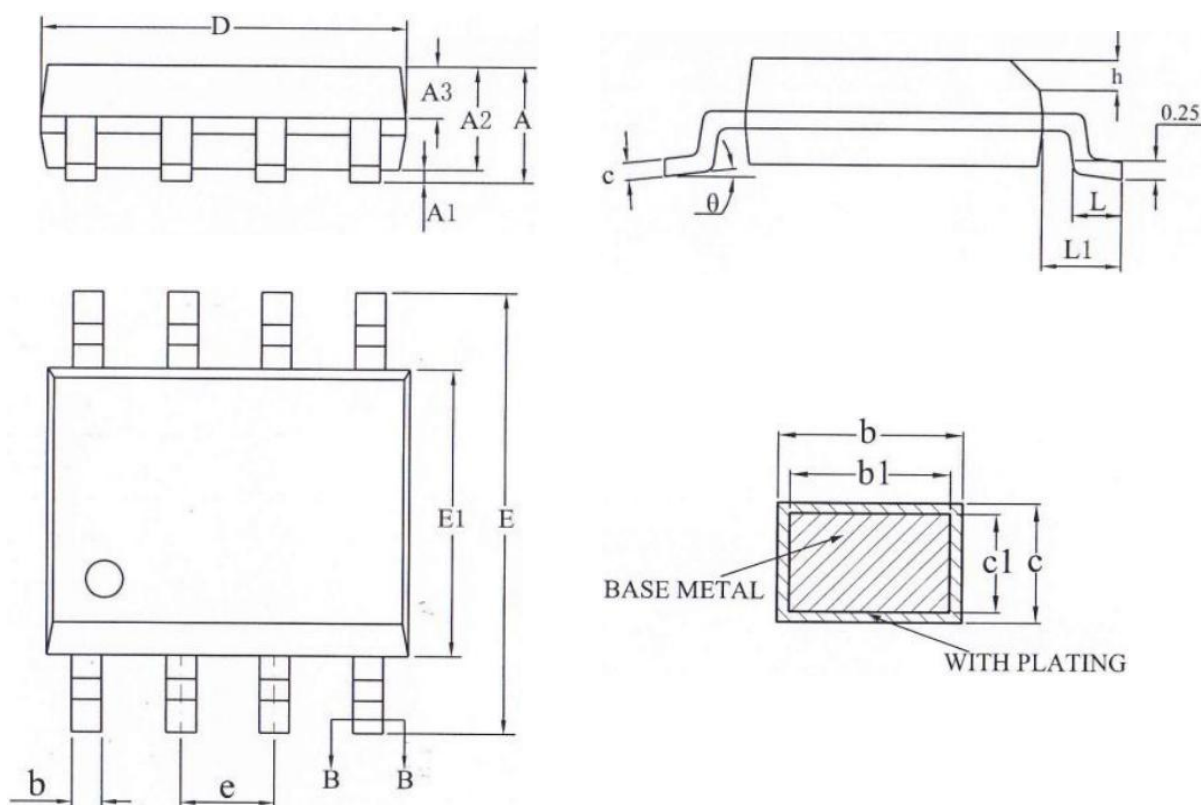


Symbol	Dimensions In Millimeters			Symbol	Dimensions In Millimeters		
	Min	Nom	Max		Min	Nom	Max
A	-	-	1.75	D	4.80	4.90	5.00
A1	0.10	-	0.225	E	5.80	6.00	6.20
A2	1.30	1.40	1.50	E1	3.80	3.90	4.00
A3	0.60	0.65	0.70	e	1.27 BSC		
b	0.39	-	0.47	h	0.25	-	0.50
b1	0.38	0.41	0.44	L	0.50	-	0.80
c	0.20	-	0.24	L1	1.05 (REF)		
c1	0.19	0.20	0.21	θ	0°	-	8°




Package Information

DIP-8

Dimensions in mm

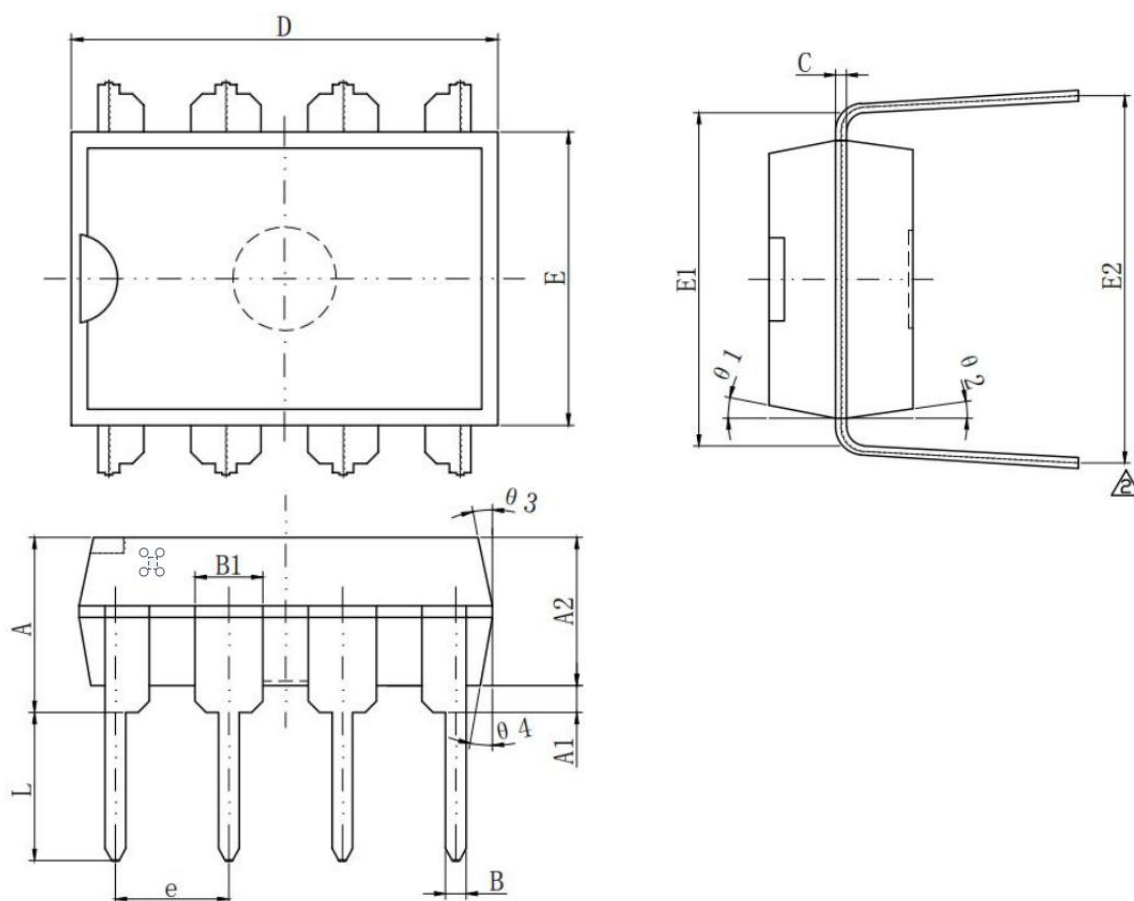

Symbol	Dimensions In Millimeters			Symbol	Dimensions In Millimeters		
	Min	Nom	Max		Min	Nom	Max
A	3.75	3.90	4.15	E1	7.35	7.62	7.85
A1	0.60	-	-	E2	8.00	8.40	8.80
A2	3.15	3.30	3.40	e	2.54 (BSC)		
B	0.38	0.46	0.56	L	3.00	3.30	3.60
B1	1.52 (BSC)			$\theta 1$	10°	-	14°
C	0.20	0.25	0.34	$\theta 2$	8°	-	12°
D	9.00	9.25	9.40	$\theta 3$	10°	-	14°
E	6.20	6.35	6.50	$\theta 4$	8°	-	12°



Shikues Disclaimer

1.Accuracy of Information and Right to Modify

The information provided in this document is for reference only. Shikues reserves the right to make changes to this document and to the specifications of the products described herein at any time, without prior notice, for the purpose of improving reliability, function, design, or for any other reason. It is the customer's responsibility to obtain and verify the latest product information and specifications before making any final design, procurement, or usage decisions.

2.No Warranty

Shikues makes no express or implied warranties, representations, or guarantees regarding the suitability of its products for any particular purpose.

Shikues assumes no liability for any assistance provided or for the design of customer products. All products are supplied "as is."

3.Intended Use and Limitation of Liability

The products described in this document are intended for use in general-purpose electronic devices. They are neither designed nor tested nor authorized for use in transportation equipment or applications requiring high reliability. Unless expressly authorized in writing by Shikues, these products must not be used as critical components in life-support systems or any applications where failure could directly pose a risk to human life (including, but not limited to, medical devices, transportation systems, aerospace equipment, nuclear facilities, and safety-critical systems).

Shikues assumes no responsibility or liability for any consequences arising from the use of its products in unauthorized or unintended applications.

Neither Shikues nor its representatives shall be held liable for any resulting damages.

4.Intellectual Property

This document does not grant any express or implied license—whether by estoppel, implication, or otherwise—to use any intellectual property rights of Shikues.